





# 三相混合式步进电机



YNY05

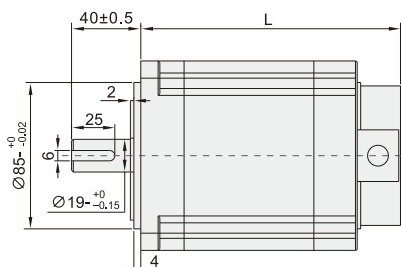

YNY06

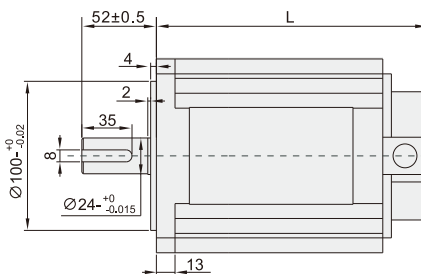

| 代码    | 型号           | 电机参数   |         |        |       |         |        |        |         |        |
|-------|--------------|--------|---------|--------|-------|---------|--------|--------|---------|--------|
|       |              | 步矩角(°) | 静转矩(Nm) | 相电流(A) | 电阻(Ω) | 相电感(mH) | 轴径(mm) | 轴长(mm) | L长度(mm) | 重量(kg) |
| YNY05 | 110H3P0843A3 | 1.2    | 8       | 4.3    | 1.31  | 17.1    | 19     | 36     | 136     | 5.7    |
|       | 110H3P1260A3 | 1.2    | 12      | 6      | 0.66  | 9.2     | 19     | 36     | 150     | 6.5    |
|       | 110H3P1665A3 | 1.2    | 16      | 6.5    | 0.63  | 8.9     | 19     | 36     | 184     | 8.7    |
|       | 110H3P2070A3 | 1.2    | 20      | 7      | 0.67  | 10.4    | 19     | 36     | 218     | 11.2   |

| 代码    | 型号           | 电机参数   |         |        |       |         |        |        |         |        |
|-------|--------------|--------|---------|--------|-------|---------|--------|--------|---------|--------|
|       |              | 步矩角(°) | 静转矩(Nm) | 相电流(A) | 电阻(Ω) | 相电感(mH) | 轴径(mm) | 轴长(mm) | L长度(mm) | 重量(kg) |
| YNY06 | 130H3P2068A3 | 1.2    | 20      | 6.8    | 0.62  | 7.8     | 24     | 48     | 168     | 10     |
|       | 130H3P2868A3 | 1.2    | 28      | 6.8    | 0.79  | 10.8    | 24     | 48     | 203     | 11     |
|       | 130H3P3568A3 | 1.2    | 35      | 6.8    | 0.97  | 14.2    | 24     | 48     | 238     | 12.3   |
|       | 130H3P5068A3 | 1.2    | 50      | 6.8    | 1.12  | 18.9    | 24     | 48     | 285     | 21.5   |



请按图示订货

## ■ YNY05-110-H3P-8-43-A3

| 代码    | 电机<br>法兰尺寸 | 相数         | 静转矩<br>Nm | 电流      | 线数    |
|-------|------------|------------|-----------|---------|-------|
| YNY05 | 110mm      | H3P:三相步进电机 | 8         | 43:4.3A | A3:3线 |



交期Delivery

3天 发货

○本产品发货时间不含周日