


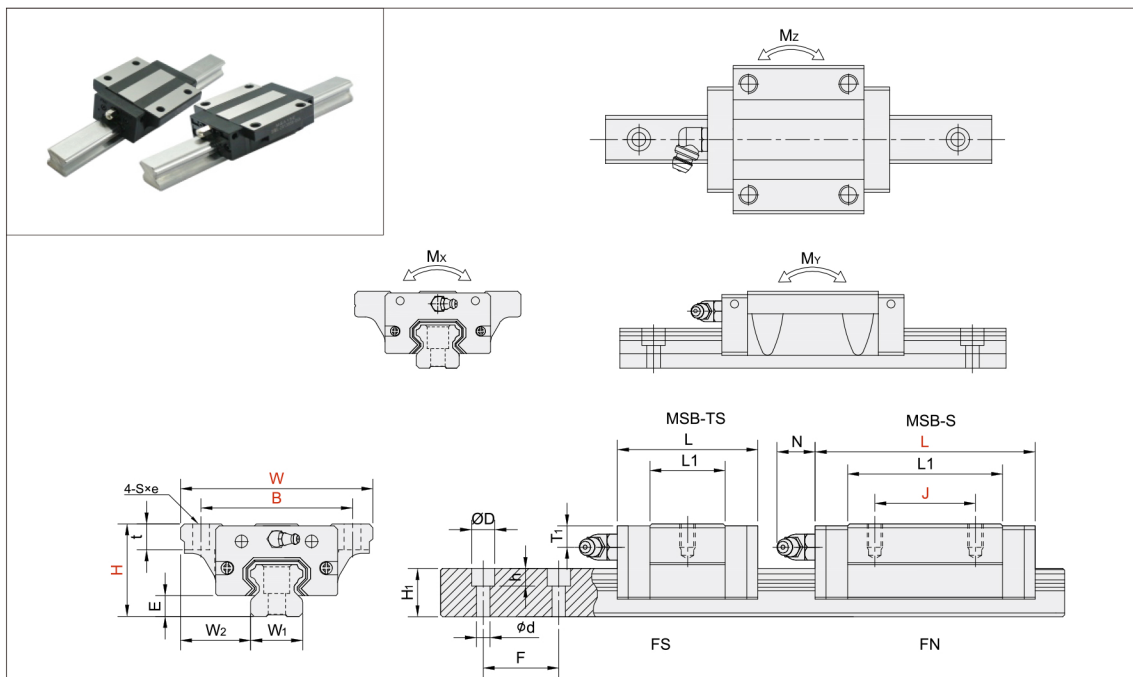

型号	组装规格(mm)				滑块尺寸(mm)										导轨尺寸						
	H	W ₂	E	W	B	J	t	L	L ₁	Q×e	T ₁	油孔	N	W ₁	H ₁	∅D	h	∅d	F		
TRS15FS	24	18.5	3.2	52	41	/	7	40.3	22.9	M5×7	5.5	M4×0.7	7	15	13	7.5	6	4.5	60		
TRS15FN						26		56.9	39.5												
TRS20FS	28	19.5	4.6	59	49	/	9	49.4	27.8	M6×9	4.5	M6×1	14	20	16.5	9.5	8.5	6	60		
TRS20FN						32		68.3	46.7												
TRS25FN	33	25	5.8	73	60	35	10	81	59	M8×10	4.5	M6×1	14	23	20	11	9	7	60		

型号	额定负重(kgf)		容许静力矩						重量	
	C	C ₀	M _x (kgf·mm)		M _y (kgf·mm)		M _z (kgf·mm)		滑块kg	导轨kg/m
			单滑块	双滑块	单滑块	双滑块	单滑块	双滑块		
TRS15FS	908	1471	10,957	6,420	33,531	6,420	33,531	0.12	1.32	
TRS15FN	1206	2206	16,436	14,884	70,960	14,884	70,960	0.19		
TRS20FS	1398	2140	21,615	10,700	59,798	10,700	59,798	0.19	2.28	
TRS20FN	1896	3307	33,404	26,459	126,998	26,459	126,998	0.29		
TRS25FN	2581	4503	52,239	43,407	207,324	43,407	207,324	0.51	3.17	

■此为XN、UN标准防尘配件