




感应电机/可逆电机 ◀ 6W □60mm




| 代码 | 规格1 | | | | 规格2 | |
|-------|---------|----------------------|-----|-------|--------|--------|
| | 2IK6GN | | | | S | C |
| | 2RK6GN | | | | | |
| ZDA01 | 电动机尺寸mm | 类型名称 | 功率W | 轴类 | 电压 | |
| | 2:表示60 | IK:感应电动机 RK:可逆电动机 | 6 | GN型齿轴 | 三相220V | 单相220V |

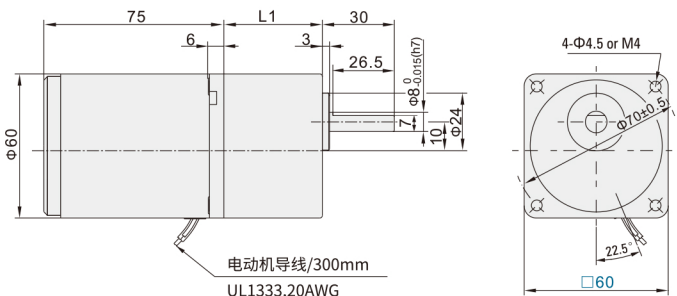

■ 接线示意图 6W,1ph100V/110V/120V/220V/230V



■ 6W,3ph220V/380V

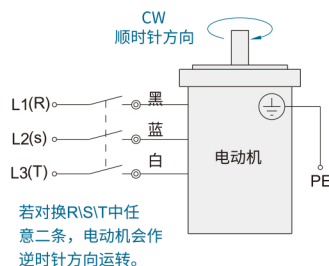

■ 感应电机特性表-连续额定

| 导线型 | | 输出功率 W | 电压 V | 频率 Hz | 电流 A | 启动转矩 mN.m | 额定转矩 mN.m | 额定转速 r/min | 电容容量 / 耐压 μF | |
|-----------|----------|-----------|---------|----------|---------|--------------|--------------|---------------|-----------------|---|
| 齿轮轴型 | 圆轴型 | | | | | | | | | |
| 2IK6GN-A | 2IK6A-A | 6 | 1ph100 | 50 | 0.240 | 55 | 48 | 1200 | 3.5 | |
| | | | | 60 | 0.250 | 50 | 40 | 1450 | | |
| 2IK6GN-E | 2IK6A-E | | 1ph 110 | 60 | 0.160 | 40 | 40 | 1450 | 2.0 | |
| | | | 1ph 120 | | 0.180 | | | | | |
| 2IK6GN-C | 2IK6A-C | | 1ph 220 | 50 | 0.130 | 50 | 48 | 1200 | 0.8 | |
| | | | 1ph 230 | | 0.140 | | | | | |
| 2IK6GN-H | 2IK6A-H | | 1ph 220 | 60 | 0.130 | 55 | 40 | 1450 | 0.8 | |
| | | | 1ph 230 | | 0.140 | | | | | |
| 2IK6GN-S | 2IK6A-S | | 6 | 3ph 220 | 50 | 0.076 | 85 | 48 | 1200 | \ |
| | | | | | 60 | 0.065 | 70 | 40 | 1450 | |
| 2IK6GN-S3 | 2IK6A-S3 | 3ph 380 | | 50 | 0.044 | 85 | 48 | 1200 | \ | |
| | | | | 60 | 0.038 | 70 | 40 | 1450 | | |

■ 可逆电机特性表-30分钟额定

| 导线型 | | 输出功率 W | 电压 V | 频率 Hz | 电流 A | 启动转矩 mN.m | 额定转矩 mN.m | 额定转速 r/min | 电容容量 / 耐压 μF |
|----------|---------|-----------|---------|----------|---------|--------------|--------------|---------------|-----------------|
| 齿轮轴型 | 圆轴型 | | | | | | | | |
| 2RK6GN-A | 2RK6A-A | 6 | 1ph100 | 50 | 0.265 | 65 | 48 | 1200 | 4.0 |
| | | | | 60 | 0.232 | 55 | 40 | 1450 | |
| 2RK6GN-E | 2RK6A-E | | 1ph 110 | 60 | 0.185 | 45 | 40 | 1450 | 2.5 |
| | | | 1ph 120 | | 0.200 | | | | |
| 2RK6GN-C | 2RK6A-C | | 1ph 220 | 50 | 0.145 | 55 | 48 | 1200 | 1.0 |
| | | | 1ph 230 | | 0.150 | | | | |
| 2RK6GN-H | 2RK6A-H | | 1ph 220 | 60 | 0.145 | 40 | 60 | 1450 | 1.0 |
| | | | 1ph 230 | | 0.150 | | | | |

■ 容许力矩单位 (上段: N.m / 下段: kgf.cm)

| 电动机/减速机 | 减速比 | 转速 | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-------|------|----------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 10 | 12.5 | 15 | 18 | 20 | 25 | 30 | 36 | 40 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | | |
| 2I(R)K6GN-A | 2I(R)K6GN-E | 3GN□K | 50Hz | 0.12 | 0.14 | 0.19 | 0.23 | 0.29 | 0.35 | 0.39 | 0.49 | 0.58 | 0.70 | 0.75 | 0.88 | 1.1 | 1.3 | 1.39 | 1.6 | 1.9 | 2.4 | 2.9 | 3 | 3 | 3 |
| | | | | 60Hz | 1.22 | 1.43 | 1.94 | 2.35 | 2.96 | 3.57 | 3.98 | 5.0 | 5.92 | 7.14 | 7.65 | 8.98 | 11.2 | 13.3 | 14.2 | 16.3 | 19.4 | 24.5 | 29.6 | 30 | 30 |
| 2I(R)K6GN-C | 2I(R)K6GN-H | | 60Hz | 0.10 | 0.12 | 0.16 | 0.19 | 0.24 | 0.29 | 0.32 | 0.41 | 0.49 | 0.58 | 0.62 | 0.73 | 0.88 | 1.1 | 1.15 | 1.3 | 1.6 | 2.0 | 2.4 | 2.6 | 3 | 3 |
| | | | | 2IK6GN-S | 2IK6GN-S3 | 1.02 | 1.22 | 1.63 | 1.94 | 2.45 | 2.96 | 3.26 | 4.18 | 5.0 | 5.92 | 6.32 | 7.45 | 8.98 | 11.2 | 11.7 | 13.3 | 16.3 | 20.4 | 24.5 | 26.5 |



请按图示订货

■ ZDA01-2IK6GN-C-2GN10K

| 代码 | 规格1 | 规格2 | 速比 |
|-------|--------|-----|--------------------|
| ZDA01 | 2IK6GN | S | 2GN10K (10:10比) |
| | | C | |
| | 2RK6GN | S | |
| | | C | |

■ ZDA01-2IK6A-C

| 代码 | 规格1 | 规格2 |
|-------|-------|-----|
| ZDA01 | 2IK6A | S |
| | | C |
| | 2RK6A | S |
| | | C |



交期Delivery

5天 发货

○本产品发货时间不含周日