


线性导向轴 ◀ 两端内螺纹带扳手槽型 · 标准型/精密型



代码	类型	D 公差	材质	硬度	表面处理
GBJ51	标准型	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度 Gcr15 HRC56~ S45C HRC56~ 9Cr18Mo HRC54~	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ52			GB:9Cr18Mo JIS:相当于SUS440C		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ56			GB:45 JIS:相当于S45C		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ57			GB:GCr15 JIS:相当于SUJ2		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ61	精密型	g6	GB:45 JIS:相当于S45C	高频淬火 含有效硬化层 淬火硬度 Gcr15 HRC56~ S45C HRC56~ 9Cr18Mo HRC54~	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ62			GB:GCr15 JIS:相当于SUJ2		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ71			GB:9Cr18 JIS:相当于SUS440C		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
GBJ72			GB:9Cr18 JIS:相当于SUS440C		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm

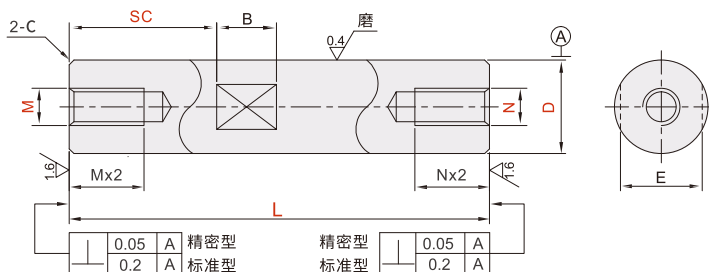

型号			L(最小单位1)	M·N(粗牙螺纹)	扳手槽尺寸			C
代码	Dg6				SC	E	B	
标准型 GBJ51 GBJ52 GBJ56 GBJ57 GBJ61 GBJ62	6	-0.004 -0.012	15~600	3	最小单位 1mm	5	8	0.5
	8		15~800	3 4 5		7		
	10	-0.005 -0.014		3 4 5 6		8		
	12		15~1000	4 5 6 8		10		
	13		20~1000	4 5 6 8		11		
	15	-0.006 -0.017		4 5 6 8 10		13		
	16			4 5 6 8 10		14		
	18		25~1200	4 5 6 8 10 12		16		
	20			4 5 6 8 10 12		17		
	25	-0.007 -0.020		30~1200		4 5 6 8 10 12 16	22	
	30		30~1500	4 5 6 8 10 12 16 20		27		
	35	-0.009 -0.025		4 5 6 8 10 12 16 20 24		30		
	40		50~1500	4 5 6 8 10 12 16 20 24 30		36		
	50			4 5 6 8 10 12 16 20 24 30		41	21	
							16	1

型号			L(最小单位1)	M·N(粗牙螺纹)	扳手槽尺寸			C
代码	Dg6				SC	E	B	
精密型 GBJ71 GBJ72 GBJ76 GBJ77	6	-0.004 -0.012	20~300	3	最小单位 1mm	5	9	0.2
	8	-0.005		3 4 5		7		
	10	-0.014	3 4 5 6	8				
	12	-0.006 -0.017	4 5 6 8	10				
	13		4 5 6 8	11				
	15		4 5 6 8 10	13				
	16		4 5 6 8 10	14				
	18		4 5 6 8 10 12	16				
	20		4 5 6 8 10 12	17				
	25	-0.007 -0.020	25~450	4 5 6 8 10 12 16		22	11	
	30			4 5 6 8 10 12 16 20		27		



请按图示订货

GBJ71-D6-L100-M3-N3-SC15

型号		L(最小单位1)		M·N(粗牙螺纹)		SC	
代码	Dg6						
GBJ71	6	-0.004 -0.012	20~300	3		SC	(最小单位1mm)



交期Delivery

4天

发货

○本产品发货时间不含周日