


免键梯形齿同步带轮 ◀ H型(齿距12.7)带筒易厚壁型免键胀套(带定心功能)



型号				材质			表面处理		
皮带宽度	皮带宽度	皮带宽度	皮带宽度	带轮	法兰	衬套	带轮	法兰	衬套
19.1mm(3/4inch)	25.4mm(1inch)	38.1mm(1.5inch)	50.8mm(2inch)						
A : 21 W : 26	A : 27 W : 32	A : 40 W : 45	A : 54 W : 59	铝合金	铝合金		本色阳极氧化		/
VAC41□□H075	VAC51□□H100	VAC61□□H150	VAC71□□H200	铝合金	铝合金		本色阳极氧化		/
VAC43□□H075	VAC53□□H100	VAC63□□H150	VAC73□□H200	S45C	SPCC	S45C	发黑	发黑	发黑
VAC44□□H075	VAC54□□H100	VAC64□□H150	VAC74□□H200				无电解镀锌		

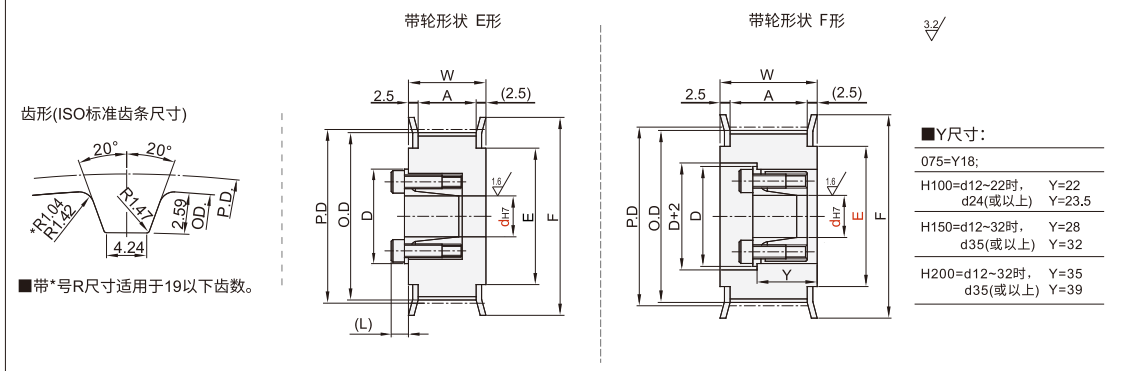

型号		带轮 形状	轴孔规格 dH7(根据胀套尺寸表选择)								P.D.	O.D.	F	E	A	W
			H075		H100		H150		H200							
代码	齿数		E形	F形	E形	F形	E形	F形	E形	F形						
VAC41-H075 VAC43-H075 VAC44-H075	14	E	12 14 15 16								56.6	55.22	61	45	H075 A: 21 W: 26	
	15		14-19	14 15 16 17 18 19	14-19	14-19	14-19	60.64	59.27	67	50					
	16		14-20		14-20		14-20	64.68	63.31	70	56					
	17		14-22 (无21)		14 15 16 17 18 19 20 22				68.72	67.35	80	60				
	18		14-28 (无21, 23, 26, 27)		14 15 16 17 18 19 20 22 24 25 28				72.77	71.39						
	19								76.81	75.44	87	67				
	20								80.85	79.48	87	67				
VAC51-H100 VAC53-H100 VAC54-H100	21 22 24 25	F	14-32 (无21, 23, 26, 27)	14 15 16 17 18 19 20 22 24 25 28 30 32	14-30 (无21, 23, 26, 27)				84.89 88.94	83.52 87.56	95	75	H100 A: 27 W: 32			
26	19-32 (无21, 23, 26, 27)		19	19 20 22 24 25 28 30 32	19-30 (无21, 23, 26, 27)	19 20 22 24 25 28 30 32			97.02	95.65	104	84				
28				19 20 22 24 25 28 30 32 35	19 20 22 24 25 28 30 32 35			101.06	99.69	111	90					
30				20 22 24 25 28 30 32 35	20 22 24 25 28 30 32 35			105.11	103.73	111	90					
32				20 22 24 25 28 30 32 35 40	20 22 24 25 28 30 32 35 40			113.19	111.82	123	102					
34				20 22 24 25 28 30 32 35 40 45	20 22 24 25 28 30 32 35 40 45			121.28	119.9	127	105					
VAC61-H150 VAC63-H150 VAC64-H150	36 38 40 42 44 48 50			20-32 (无21, 23, 26, 27)						129.36 137.45 145.53	127.99 136.07 144.16	135 144 152			115 125 130	H150 A: 40 W: 45
VAC71-H200 VAC73-H200 VAC74-H200	32 34 36 38 40 42 44 48 50			20 22 24 25 28 30 32 35 40 45 50	20 22 24 25 28 30	20 22 24 25 28 30 32 35 40 45 50			153.62 161.7 169.79	152.24 160.33 168.41	165 170 180	140 150 155	H200 A: 54 W: 59			
									194.04 202.13 202.13	192.67 200.76 200.76	205 210 210	170 180 185				

胀套孔径尺寸

dH7	容许最大扭矩 N.m	D	(L)
12	44.1	28.5	6.5
14	63.7	30.5	
15	80.4	31.5	
16	833	33	
17	92.2	33.5	
18	95.1	34.5	
19	98.1	35.5	

胀套孔径尺寸

dH7	容许最大扭矩 N.m	D	(L)
20	216	42	8
22	255	44	
24	363	46	
25	392	47	
28	441	50	8.5
30	500	52	
32	530	54	

胀套孔径尺寸

dH7	容许最大扭矩 N.m	D	(L)
35	883	62	10
40	1079	67	
45	1285	72	
50	1706	77	10.5



请按图示订货

■ VAC41-H075-14-E-d8

型号		带轮形状	轴孔规格 d H7	
代码	齿数		H075	
VAC41-H075	14	E	E	F
	15	F	8-12	8 10



交期Delivery

7天

发货

○本产品发货时间不含周日