



# 平皮带用惰轮 ◀ 法兰型/圆弧型T=6-32



■轴承精度: GB/T 307.1 0级  
相当于: JIS B 1514 0级

法兰型  
VBG01/02/04/11

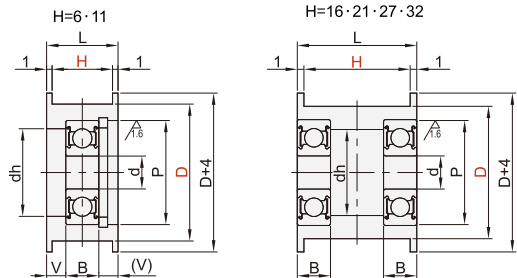


■轴承采用压入式。

代码	类型	材质		轴承	表面处理	附件
		主体	轴			
VBG01	法兰型	45	S45C	钢	发黑 无电解镀锌 本色阳极氧化	挡圈 (SUS304)
VBG02		LF2	A5052			
VBG04		0Cr18Ni9	SUS304			
VBG11		45	S45C			
VBG21	圆弧型	45	S45C	钢	发黑 无电解镀锌 本色阳极氧化	
VBG22		LF2	A5052			
VBG24		0Cr18Ni9SUS304	SUS304			
VBG31		蓝色POM	蓝色POM			
VBG36			不锈钢		-	

■如对防锈有要求, 请优先选用不锈钢材质或无电解镀锌产品。

圆弧型  
VBG21/22/24/31/36

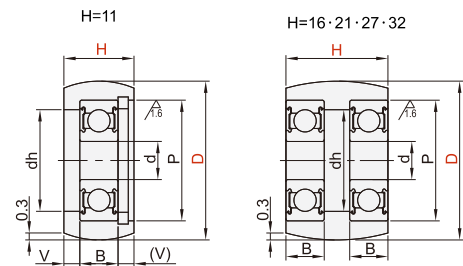

## ■法兰型

代码	D	H	P	dh	V	L	使用轴承						
							型号	d	B				
VBG01	15	6	11	9	2	8	694ZZx1	4	4				
	20						625ZZx1	5	5				
	20	16	13	4	625ZZx1		5	5					
	25	11	19	16	3		626ZZx1	6	6				
	30						698ZZx1	8	6				
	15	16	11	9	3		18	685ZZx2	5	5			
	20							625ZZx2	5	5			
	25							626ZZx2	6	6			
	30							698ZZx2	8	6			
	35							6000ZZx2	10	8			
	40							26	23				
	15	21	11	9	3		23	685ZZx2	5	5			
20	688ZZx2					8		6					
25	698ZZx2					8		6					
30	698ZZx2					8		6					
40	6000ZZx2					10		8					
50	28					25							
15	27	11	9	3	29	685ZZx2	5	5					
20						688ZZx2	8	6					
25						698ZZx2	8	6					
30						698ZZx2	8	6					
40						6000ZZx2	10	8					
50						28	25						
15						32	11	9	3	34	685ZZx2	5	5
20											688ZZx2	8	6
25											698ZZx2	8	6
30											698ZZx2	8	6
40											6000ZZx2	10	8
50											28	25	

## ■圆弧型

代码	D	H	P	dh	V	使用轴承				
						型号	d	B		
VBG21	20	11	16	13	2	625ZZx1	5	5		
	25					626ZZx1	6	6		
	30		698ZZx1	8		6				
	15		16	11		9	685ZZx2	5	5	
	20						625ZZx2	5	5	
	25			626ZZx2		6	6			
	30	698ZZx2		8	6					
	35	6000ZZx2		10	8					
	40	26		23						
	15	21	11	9	3	685ZZx2	5	5		
	20					688ZZx2	8	6		
	25		698ZZx2	8		6				
30	698ZZx2		8	6						
35	6000ZZx2		10	8						
40	26		23							
15	27	11	9	3	32	685ZZx2	5	5		
20						688ZZx2	8	6		
25						698ZZx2	8	6		
30						698ZZx2	8	6		
40						6000ZZx2	10	8		
50						28	25			
15		32	11		9	3	34	685ZZx2	5	5
20								688ZZx2	8	6
25			698ZZx2		8			6		
30			698ZZx2		8			6		
40			6000ZZx2		10			8		
50			28		25					

## ■可选加工项

可选加工	切割法兰	变更法兰厚度
代码	FC()	TC
技术说明	<p>选型方法 FC18.5</p> <ul style="list-style-type: none"> <li>■降低法兰高度。</li> <li>■最小单位0.5。</li> <li>■D≤FC&lt;D+4</li> <li>■仅适用法兰型。</li> </ul>	<p>选型方法 TC</p> <ul style="list-style-type: none"> <li>■将法兰厚度变更为0.5。</li> <li>■L尺寸缩短1mm。</li> <li>■仅适用法兰型。</li> </ul>



请按图示订货

## ■ VBG01-D20-H11-FC

型号		H	可选加工代码
代码	D		
VBG01	20	11	FC( ) TC



交期Delivery

7天 发货

○本产品发货时间不含周日