


悬臂销 ◀ 带挡圈槽型 内螺纹安装型




代码			材质		表面处理
标准型	台阶型	六角型	国标	相当	
MXC01	MXC11	MXC21	45	S45C	发黑
MXC02	MXC12	MXC22			无电解镀锌
MXC06	MXC16	MXC26	0Cr18Ni9	SUS304	/


标准型 MXC01/02/06

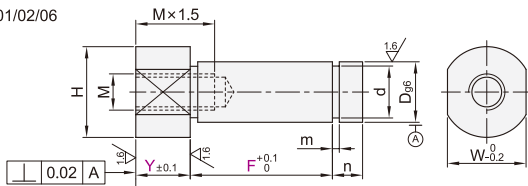


标准型, $Y \geq 17$ 时
两平面宽度尺寸




台阶型, $W < V$, $Y \geq 17$ 时
两平面宽度尺寸



台阶型 MXC11/12/16

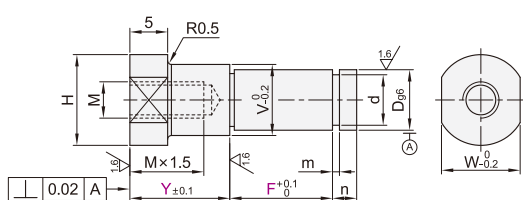




六角型 MXC21/22/26

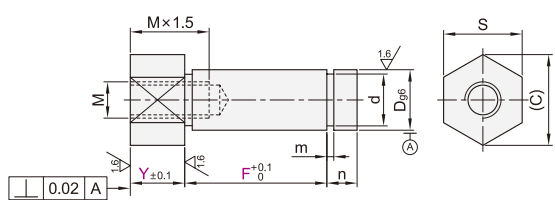

型号		Dg6		最小单位1		M	H	W	d	m	n	
代码	规格			Y	F							
标准型 MXC01 MXC02 MXC06	6	6	-0.004 -0.012	2~65	5~110	M3	10	8	5	+0.075 0 -0.090	0.7	2
	8	8	-0.005 -0.014			M4	12	10	7	0.9	3	
	10	10	-0.010			M6	15	13	9.6	0 -0.090		
	12	12				M8	17	14	11.5			
	13	13			10~160		18	15	12.4	0 -0.11	1.15	4
	15	15	-0.006 -0.017				20	17	14.3			
	16	16				M10	21	18	15.2			
	17	17					23	20	16.2			
	18	18		4~80	M12	26	24	19	0 -0.21	1.35	5	
	20	20	-0.007 -0.020		M16	28	26	21				
	22	22				31	27	23.9				
	25	25			M12							
	25A	25			M20							
	30	30			M16	36	32	28.6				1.65

型号		Dg6		最小单位1		M	S	(C)	d	m	n							
代码	规格			Y	F													
台阶型 MXC11 MXC12 MXC16	6	6	-0.004 -0.012	5~110		M3	8	9.2	5	+0.075 0	0.7	2						
	8	8	-0.005 -0.014			M4	10	11.5	7	+0.09 0	0.9	3						
	10	10	-0.014			M6	13	15	9.6	0 -0.09								
	12	12				M8	14	16.2	11.5									
	13	13		7~65			17	19.6	12.4	0 -0.11	1.15	4						
	15	15	-0.006 -0.017						14.3									
	16	16					M10	19	21.9		15.2							
	17	17							16.2									
	18	18		10~160					17		1.35							
	20	20						24	27.7				19					
	22	22					M12						21					
	25	25	-0.007 -0.020				M16	27	31.2				23.9	0 -0.21				
	25A	25		7~80								1.65	5					
	30	30												M20	32	36.9	28.6	
	30A	30												M16				

型号		Dg6		最小单位1		M	V	H	W	d	m	n
代码	规格			Y	F							
六角型 MXC21 MXC22 MXC26	6	6	-0.004 -0.012	5~110	M3	8	10	8	5	+0.075 0	0.7	2
	8	8	-0.005 -0.014		M4	10	12	10	7	+0.090 0	0.9	3
	10	10	-0.014		M6	13	15	13	9.6	+0.090 0		
	12	12			M8	15	17	14	11.5		1.15	
	13	13		2~65		16	18	15	12.4			
	15	15	-0.006 -0.017			18	20	17	14.3		1.15	
	16	16			M10	19	21	18	15.2	0 -0.11		4
	17	17				20	23	20	16.2			
	18	18		21		24	24	17				
	20	20		10~160		M12	24	26	24	19		1.35
	22	22				26	28	26	21			
	25	25	-0.007 -0.020		M16	29	31	27	23.9	0 -0.21		5
	25A	25			M12							
	30	30			M20							
	30A	30			M16	34	36	32	28.6		1.65	

代码	技术说明																																																	
YC	变更Y尺寸公差 	选型方法 YC ① 变更Y尺寸公差为±0.04																																																
WC	变更为四面扳手槽 	选型方法 WC ① 六角型不适用。																																																
ME	附带挡圈	选型方法 ME ① 规格6~8:E型挡圈 规格10~30A:C型挡圈																																																
AD	增加引导部 	选型方法 AD ① 在如左图所示位置增加引导部 <table><tr><th>规格</th><th>M</th><th>ADg6</th></tr><tr><td>6</td><td>M3</td><td>6</td></tr><tr><td>8</td><td>M4</td><td>8</td></tr><tr><td>10</td><td>M6</td><td>10</td></tr><tr><td>12</td><td></td><td>12</td></tr><tr><td>13</td><td>M8</td><td>13</td></tr><tr><td>15</td><td></td><td>15</td></tr><tr><td>16</td><td>M10</td><td>16</td></tr><tr><td>17</td><td></td><td>17</td></tr><tr><td>18</td><td></td><td>18</td></tr><tr><td>20</td><td></td><td>20</td></tr><tr><td>22</td><td>M12</td><td>22</td></tr><tr><td>25</td><td>M16</td><td>25</td></tr><tr><td>25A</td><td>M12</td><td></td></tr><tr><td>30</td><td>M20</td><td>30</td></tr><tr><td>30A</td><td>M16</td><td></td></tr></table>	规格	M	ADg6	6	M3	6	8	M4	8	10	M6	10	12		12	13	M8	13	15		15	16	M10	16	17		17	18		18	20		20	22	M12	22	25	M16	25	25A	M12		30	M20	30	30A	M16	
规格	M	ADg6																																																
6	M3	6																																																
8	M4	8																																																
10	M6	10																																																
12		12																																																
13	M8	13																																																
15		15																																																
16	M10	16																																																
17		17																																																
18		18																																																
20		20																																																
22	M12	22																																																
25	M16	25																																																
25A	M12																																																	
30	M20	30																																																
30A	M16																																																	



请按图示订货



MXC01-6-Y2-F5-YC

型号	Y	F	可选加工
代码 规格	2~65	5~110	YC WC AD ME

交期Delivery
5天 发货
○ 本产品发货时间不含周日