


微型深沟球轴承 ◀ 双面带防



代码	类型	轴承类别代码	密封类型-后置代码	轴承材质	轴承精度
BG	标准型	6	双面铁盖密封 ZZ	SUJ2	GB/T307P0
SBG				SUS440C	JISB1514 0级

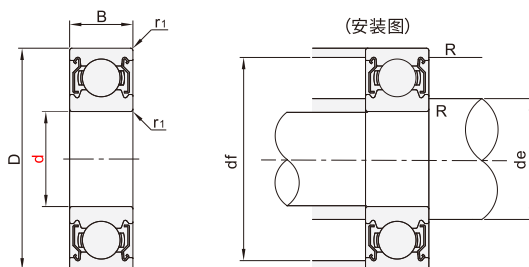

型号		d	D	B	r1(min)	基本额定负载		容许转速rpm (参考)	安装尺寸			重量 (g)		
代码	轴承型号					Cr(动)	C0(静)		de(min)	df(max)	R(max)			
BG SBG	682ZZ	2	5	2.3	0.08	143	40	85000	2.7	3.9	0.008	0.17		
	692ZZ		6	3		281	79	75000	3	4.8	0.15	0.38		
	602ZZ		7	3.5		328	102	60000	3.2	5.8	0.15	0.58		
	682AZZ	2.5	6	2.6	0.08	178	59	71000	3.7	4.9	0.08	0.29		
	692AZZ		7	3.5	0.15	328	102	63000	3.85	5.65	0.15	0.55		
	673ZZ	3	6	2.5	0.08	242	94	71000	3.6	5.4	0.08	0.2		
	683ZZ		7	3	0.1	390	130	63000	3.9	5.8	0.1	0.45		
	693ZZ		8	4	0.15	560	180	60000	4.2	6.8	0.15	0.61		
	603ZZ	9	5	571		189	56000	7.8						
	623ZZ	10	4	640		224	50000	8.8		1.6				
	633ZZ	4	13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43		
	674ZZ		7	2.5	0.08	222	88	60000		6.4	0.08	0.28		
	684ZZ		9	4	0.15	640	224	53000		5	7.8	0.1	1.01	
	694ZZ	11	715			276	48000	5.2	9.8	0.15	1.8			
	604ZZ	12	0.2			957	350	48000	5.6	10.4	0.2	2.34		
	624ZZ	13		1310	490	40000	11.4	3.2						
	634ZZ	5	16	5	0.3	1340	523	36000	6	14	0.3	5.44		
	675ZZ		8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34		
	685ZZ		11	5	0.15	715	282	45000	6.2	9.8	0.2	1.96		
	695ZZ	13	4	0.2	1080	430	43000	6.6	11.4	2.4				
	605ZZ	14	5		1330	505	40000		12.4	3.5				
	625ZZ	16			0.3	1760	680		36000	14	4.8			
	635ZZ	6	19	6	0.3	2336	896	32000	7	17	0.3	8.89		
	676ZZ		10	3	0.1	496	218	45000		7.04		9.3	0.1	0.7
	686ZZ		13	5	0.16	1080	440	40000		7		11.8	0.2	2.69
	696ZZ	15	6	0.2	1350	530	7.6		13.4	0.2	3.8			
	606ZZ	17			6	2190	865		38000	15	6			
	626ZZ	19				0.3	2340	885	32000	17	0.3	8.1		
	636ZZ	8	22	7	0.3	3333	1423	30000	8	20	0.3	14.5		
	678ZZ		12	3.5		543	274	40000		9.05		11.33	0.1	0.99
	688ZZ		16	5		0.2	1610	715		36000		9.6	14.4	0.2
	698ZZ	19	6	1990	865	17	7.3							
	608ZZ	22	7	3350	1400	34000	20	12						
	628ZZ	24	8	4000	1590	28000	10	22	17					
	638ZZ	28	9	4560	1983			26	30.3					



请按图示订货

■ BG-682ZZ

代码	规格	d
BG	682ZZ	2



交期Delivery

3天 发货

○本产品发货时间不含周日

轴承 / 关节轴承 27