


低卤阻燃热缩管/黄绿标识热缩管



代码	类型	热缩倍率	使用温度	标准颜色	执行标准
JDQB51	低卤阻燃款	2:1	-84°C~125°C	黑/红/黄/绿/蓝/白 透明(非阻燃)	UL224.CUL
JDQB62	黄绿标识热缩		-55°C~120°C	黄绿相间	/

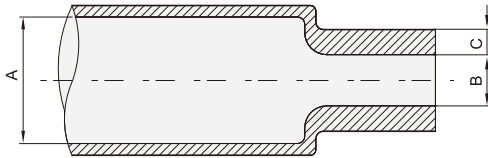

代码	型号	规格	收缩前内径 A (mm)		收缩后尺寸(mm)		标准包装 (m/盘)	适用范围 (mm)
			内径B	壁厚C	内径B	壁厚C		
JDQB51	D0.6	Ø0.6	0.9±0.20	≤0.4	0.33±0.10	200	0.4-0.7	
	D0.8	Ø0.8	1.1±0.20	≤0.5	0.33±0.10	200	0.6-0.8	
	D1.0	Ø1.0	1.5±0.20	≤0.65	0.36±0.10	200	0.75-0.9	
	D1.5	Ø1.5	2.0±0.20	≤0.85	0.36±0.10	200	0.95-1.4	
	D2.0	Ø2.0	2.5±0.20	≤1	0.45±0.10	200	1.1-1.8	
	D2.5	Ø2.5	3.0±0.20	≤1.3	0.45±0.10	200	1.35-2.3	
	D3.0	Ø3.0	3.5±0.20	≤1.5	0.45±0.10	200	1.6-2.7	
	D3.5	Ø3.5	4.0±0.20	≤1.8	0.45±0.10	200	1.85-3.2	
	D4.0	Ø4.0	4.7±0.20	≤2	0.45±0.10	200	2.1-3.6	
	D4.5	Ø4.5	5.0±0.20	≤2.3	0.45±0.10	100	2.35-4.0	
	D5.0	Ø5.0	5.5±0.20	≤2.5	0.56±0.10	100	2.6-4.5	
	D6.0	Ø6.0	6.5±0.20	≤3	0.56±0.10	100	3.1-5.4	
	D7.0	Ø7.0	7.5±0.30	≤3.5	0.56±0.10	100	3.7-6.3	
	D8.0	Ø8.0	8.5±0.30	≤4	0.56±0.10	100	4.2-7.2	
	D9.0	Ø9.0	9.5±0.30	≤4.5	0.56±0.10	100	4.7-8.0	
	D10	Ø10	10.5±0.30	≤5	0.56±0.10	100	5.2-9.0	
	D11	Ø11	11.5±0.30	≤5.50	0.56±0.10	100	5.7-10	
	D12	Ø12	12.5±0.30	≤6	0.56±0.10	100	6.2-11	
	D13	Ø13	13.5±0.30	≤6.5	0.56±0.10	100	6.7-12	
	D14	Ø14	14.5±0.30	≤7	0.70±0.10	100	7.3-13	
	D15	Ø15	15.5±0.40	≤7.5	0.70±0.10	100	7.8-14	
	D16	Ø16	16.5±0.40	≤8	0.70±0.10	100	8.3-15	
	D17	Ø17	17.5±0.40	≤8.5	0.70±0.10	100	8.8-16	
	D18	Ø18	19.0±0.50	≤9	0.70±0.10	100	9.3-17	
D20	Ø20	22.0±0.50	≤10	0.80±0.15	100	10.4-19		
D22	Ø22	24.0±0.50	≤11	0.80±0.15	100	11.4-21		
D25	Ø25	26.0±0.50	≤12.5	0.9±0.15	50	12.8-24		
D28	Ø28	29.0±0.50	≤14	0.9±0.15	50	14.4-29		
D30	Ø30	31.5±1.0	≤15	0.9±0.15	50	16-29		
D35	Ø35	36.5±1.0	≤17.5	1±0.15	50	18-34		
D40	Ø40	41.5±1.0	≤20	1±0.15	50	21-39		
D45	Ø45	46.5±1.5	≤22.5	1±0.15	25	23.5-44		
D50	Ø50	≥50	≤25	1.1±0.15	25	26-49		
D60	Ø60	≥60	≤30	1.1±0.15	25	35-50		
D70	Ø70	≥70	≤35	1.2±0.15	25	40-60		
D80	Ø80	≥80	≤40	1.3±0.20	25	45-70		
D90	Ø90	≥90	≤45.5	1.3±0.20	25	50-80		
D100	Ø100	≥100	≤50	1.3±0.20	25	55-85		
D120	Ø120	≥120	≤60	1.3±0.20	25	65-100		

代码	型号	规格	收缩前内径 A (mm)	收缩后尺寸(mm)		标准包装 (m/盘)
				内径B	壁厚C	
JDQB61	D1.0	Φ1	1.5±0.30	≤0.7	0.28±0.10	200
	D1.5	Φ1.5	2±0.30	≤0.9	0.3±0.10	200
	D2.0	Φ2	2.5±0.30	≤1	0.35±0.10	200
	D2.5	Φ2.5	3±0.30	≤1.3	0.36±0.10	200
	D3.0	Φ3	3.5±0.40	≤1.5	0.38±0.10	200
	D3.5	Φ3.5	4±0.40	≤1.8	0.4±0.10	200
	D4.0	Φ4	4.5±0.40	≤2	0.45±0.10	200
	D4.5	Φ4.5	5±0.40	≤2.3	0.45±0.10	100
	D5.0	Φ5	5.5±0.40	≤2.5	0.45±0.10	100
	D6.0	Φ6	6.5±0.40	≤3	0.5±0.10	100
	D7.0	Φ7	7.5±0.40	≤3.5	0.5±0.10	100
	D8.0	Φ8	8.5±0.50	≤4	0.55±0.10	100
	D9.0	Φ9	9.5±0.50	≤4.5	0.55±0.10	100
	D10	Φ10	10.5±0.50	≤5	0.55±0.10	100
	D11	Φ11	11.5±0.50	≤5.5	0.6±0.10	100
	D12	Φ12	12.5±0.50	≤6	0.6±0.10	100
	D13	Φ13	13.5±0.50	≤6.5	0.6±0.10	100
	D14	Φ14	14.5±0.50	≤7	0.65±0.10	100
	D15	Φ15	15.5±0.60	≤7.5	0.7±0.10	100
	D16	Φ16	17±0.60	≤8	0.7±0.10	100
	D17	Φ17	17.5±0.60	≤8.5	0.7±0.10	100
	D18	Φ18	19±0.70	≤9	0.7±0.15	100
	D20	Φ20	22±0.70	≤10	0.8±0.15	100
	D22	Φ22	24±0.70	≤11	0.9±0.15	100
D25	Φ25	26±0.70	≤12.5	0.9±0.15	50	
D28	Φ28	29±0.70	≤14	0.95±0.15	50	
D30	Φ30	31.5±0.70	≤15	0.95±0.15	50	
D35	Φ35	36.5±0.70	≤17.5	1±0.20	50	
D40	Φ40	41.5±0.70	≤20	1±0.20	50	
D45	Φ45	46±0.70	≤22.5	1±0.20	25	
D50	Φ50	51±0.70	≤25	1±0.20	25	
D60	Φ60	≥60	≤30	1.1±0.20	25	
D70	Φ70	≥70	≤35	1.2±0.20	25	
D80	Φ80	≥80	≤40	1.3±0.20	25	
D90	Φ90	≥90	≤45	1.5±0.20	25	
D100	Φ100	≥100	≤50	1.65±0.20	25	
D120	Φ120	≥120	≤60	1.70±0.20	15	

波纹管/发热管 16



请按图示订货

JDQB51-D90

代码	型号
JDQB51	D90



交期Delivery

5天 发货

○本产品发货时间不含周日



www.vipdo.cn 400-098-1117

工厂自动化零件一站式采购平台