





# AA 滚珠型直线导轨 ◀ ANL-B/ANL-BL

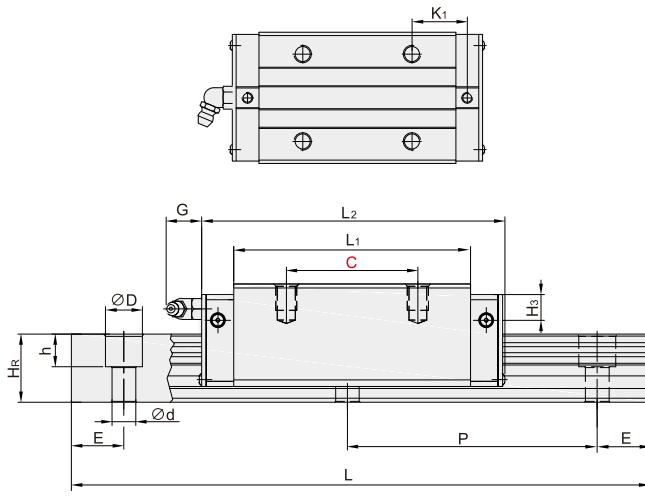

| 代码    | 类型 | 滑块固定方式 | 滑块数量 | 材质  | 导轨固定方式 |
|-------|----|--------|------|-----|--------|
| LAA41 | 组件 | 上锁式    | 单滑块  | 合金钢 | 上锁式    |
| LAA42 |    |        | 双滑块  |     |        |



| 代码             | 滑块型号    | 组件尺寸<br>(mm) |     |      | 滑块尺寸(mm) |    |     |    |      |       |       |     |       |      |      |      |    | 导轨尺寸(mm) |     |     |     |    |                           |       |       |  |  |  | 导轨<br>固定螺栓<br>尺寸<br>(mm) | 基本<br>动额定<br>负荷<br>C(kN) |
|----------------|---------|--------------|-----|------|----------|----|-----|----|------|-------|-------|-----|-------|------|------|------|----|----------|-----|-----|-----|----|---------------------------|-------|-------|--|--|--|--------------------------|--------------------------|
|                |         | H            | H1  | N    | W        | B  | B1  | C  | L1   | L2    | K1    | G   | MxL   | T    | H2   | H3   | Wr | Hr       | D   | h   | d   | P  | E                         |       |       |  |  |  |                          |                          |
| LAA41<br>LAA42 | ANL15B  | 24           | 4.3 | 9.5  | 34       | 26 | 4   | 26 | 39.4 | 61.4  | 10    | 5.3 | M4x4  | 6    | 3.95 | 3.7  | 15 | 15       | 7.5 | 5.3 | 4.5 | 60 | 见<br>ANL<br>端距<br>参数<br>表 | M4x16 | 11.38 |  |  |  |                          |                          |
|                | ANL25B  | 36           | 5.5 | 12.5 | 48       | 35 | 6.5 | 35 | 58   | 84    | 16.8  | 12  | M6x6  | 8    | 6    | 9    | 23 | 22       | 11  | 9   | 7   | 60 |                           | M6x20 | 26.48 |  |  |  |                          |                          |
|                | ANL25BL |              |     |      |          |    |     | 50 | 78.6 | 104.6 | 19.6  |     |       |      |      |      |    |          |     |     |     |    |                           |       |       |  |  |  |                          |                          |
|                | ANL30B  | 42           | 6   | 16   | 60       | 40 | 10  | 40 | 70   | 97.4  | 20.25 | 12  | M8x10 | 8.5  | 6.5  | 10.8 | 28 | 26       | 14  | 12  | 9   | 80 |                           | M8x25 | 38.74 |  |  |  |                          |                          |
|                | ANL30BL |              |     |      |          |    |     | 60 | 93   | 120.4 | 21.75 |     |       |      |      |      |    |          |     |     |     |    |                           |       |       |  |  |  |                          |                          |
|                | ANL35B  | 48           | 7.5 | 18   | 70       | 50 | 10  | 50 | 80   | 112.4 | 20.6  | 12  | M8x12 | 10.2 | 9    | 12.6 | 34 | 29       | 14  |     |     |    |                           |       |       |  |  |  |                          |                          |

| 代码             | 滑块型号    | 基本<br>静额定负荷<br>C <sub>0</sub> (kN) | 容许静力矩      |            |            | 重量         |              |
|----------------|---------|------------------------------------|------------|------------|------------|------------|--------------|
|                |         |                                    | MR<br>kN-m | Mp<br>kN-m | My<br>kN-m | 滑块<br>(kg) | 导轨<br>(kg/m) |
| LAA41<br>LAA42 | ANL15B  | 25.31                              | 0.17       | 0.15       | 0.15       | 0.14       | 1.45         |
|                | ANL25B  | 56.19                              | 0.64       | 0.51       | 0.51       | 0.42       | 3.21         |
|                | ANL25BL | 76.00                              | 0.87       | 0.88       | 0.88       | 0.57       |              |
|                | ANL30B  | 83.06                              | 1.06       | 0.85       | 0.85       | 0.78       | 4.47         |
|                | ANL30BL | 110.13                             | 1.40       | 1.47       | 1.47       | 1.03       |              |
|                | ANL35B  | 102.87                             | 1.73       | 1.20       | 1.20       | 1.14       | 6.30         |
|                | ANL35BL | 136.31                             | 2.29       | 2.08       | 2.08       | 1.52       |              |
|                | ANL45B  | 155.93                             | 3.01       | 2.35       | 2.35       | 2.08       | 10.41        |
|                | ANL45BL | 207.12                             | 4.00       | 4.07       | 4.07       | 2.75       |              |

# AA 滚珠型直线导轨 ◀ ANL-B/ANL-BL

| 代码             | 滑块型号    | 导轨形式  | 尺寸                               | 滑块类型                  | 预压                            | 精度                        | 代码             | 滑块型号    | 导轨长度<br>L:mm | 精度                        |
|----------------|---------|-------|----------------------------------|-----------------------|-------------------------------|---------------------------|----------------|---------|--------------|---------------------------|
| LAA41<br>LAA42 | ANL15B  | ANL系列 | 15<br>25<br>30<br>35<br>45<br>55 | B: 四方型;<br>BL: 四方加长型; | Z0: 轻预压<br>ZA: 中预压<br>ZB: 重预压 | C: 普通级<br>H: 高级<br>P: 精密级 | LAA41<br>LAA42 | ANL15B  | 1~4000       | C: 普通级<br>H: 高级<br>P: 精密级 |
|                | ANL25B  |       |                                  |                       |                               |                           |                | ANL25B  |              |                           |
|                | ANL25BL |       |                                  |                       |                               |                           |                | ANL25BL |              |                           |
|                | ANL30B  |       |                                  |                       |                               |                           |                | ANL30B  |              |                           |
|                | ANL30BL |       |                                  |                       |                               |                           |                | ANL30BL |              |                           |
|                | ANL35B  |       |                                  |                       |                               |                           |                | ANL35B  |              |                           |
|                | ANL35BL |       |                                  |                       |                               |                           |                | ANL35BL |              |                           |
|                | ANL45B  |       |                                  |                       |                               |                           |                | ANL45B  |              |                           |
|                | ANL45BL |       |                                  |                       |                               |                           |                | ANL45BL |              |                           |

直  
线  
导  
轨  
20

·ANL端距参数

| H | 24        | 36        | 42        | 48        | 60        | F(安装孔数) | E                                             |
|---|-----------|-----------|-----------|-----------|-----------|---------|-----------------------------------------------|
| L | 100~139   | /         | /         | /         | /         | 2       | E=[L-(F-1)×P]/2<br>P: 螺钉孔间距离<br>E: 螺钉中心孔至端面距离 |
|   | 140~199   | 160~199   | 200~263   | 200~255   | 255~336   | 3       |                                               |
|   | 200~259   | 200~261   | 264~343   | 256~335   | 337~441   | 4       |                                               |
|   | 260~319   | 262~321   | 344~423   | 336~415   | 442~546   | 5       |                                               |
|   | 320~379   | 322~381   | 424~503   | 416~495   | 547~651   | 6       |                                               |
|   | 380~439   | 382~441   | 504~583   | 496~575   | 652~756   | 7       |                                               |
|   | 440~499   | 442~501   | 584~663   | 576~655   | 757~861   | 8       |                                               |
|   | 500~559   | 502~561   | 664~743   | 656~735   | 862~966   | 9       |                                               |
|   | 560~619   | 562~621   | 744~823   | 736~815   | 967~1071  | 10      |                                               |
|   | 620~679   | 622~681   | 824~903   | 816~895   | 1072~1176 | 11      |                                               |
|   | 680~739   | 682~741   | 904~983   | 896~975   | 1177~1281 | 12      |                                               |
|   | 740~799   | 742~801   | 984~1063  | 976~1055  | 1282~1386 | 13      |                                               |
|   | 800~859   | 802~861   | 1064~1143 | 1056~1135 | 1387~1491 | 14      |                                               |
|   | 860~919   | 862~921   | 1144~1223 | 1136~1215 | 1492~1596 | 15      |                                               |
|   | 920~979   | 922~981   | 1224~1303 | 1216~1295 | 1597~1701 | 16      |                                               |
|   | 980~1039  | 982~1041  | 1304~1383 | 1296~1375 | 1702~1806 | 17      |                                               |
|   | 1040~1099 | 1042~1101 | 1384~1463 | 1376~1455 | 1807~1911 | 18      |                                               |
|   | 1100~1159 | 1102~1161 | 1464~1543 | 1456~1535 | 1912~2016 | 19      |                                               |
|   | 1160~1219 | 1162~1221 | 1544~1623 | 1536~1615 | 2017~2121 | 20      |                                               |
|   | 1220~1279 | 1222~1281 | 1624~1703 | 1616~1695 | 2122~2226 | 21      |                                               |
|   | 1280~1339 | 1282~1341 | 1704~1783 | 1696~1775 | 2227~2331 | 22      |                                               |
|   | 1340~1399 | 1342~1401 | 1784~1863 | 1776~1855 | 2332~2436 | 23      |                                               |
|   | 1400~1459 | 1402~1461 | 1864~1943 | 1856~1935 | 2437~2541 | 24      |                                               |
|   | 1460~1519 | 1462~1521 | 1944~1960 | 1936~2015 | 2542~2646 | 25      |                                               |
|   | 1520~1579 | 1522~1581 | /         | 2016~2095 | 2647~2751 | 26      |                                               |
|   | 1580~1639 | 1582~1641 | /         | 2096~2175 | 2752~2856 | 27      |                                               |
|   | 1640~1699 | 1642~1701 | /         | 2176~2255 | 2857~2961 | 28      |                                               |
|   | 1700~1759 | 1702~1761 | /         | 2256~2335 | 2962~3066 | 29      |                                               |
|   | 1760~1819 | 1762~1821 | /         | 2336~2415 | 3067~3171 | 30      |                                               |
|   | 1820~1879 | 1822~1881 | /         | 2416~2496 | 3172~3276 | 31      |                                               |
|   | 1880~1939 | 1882~1941 | /         | 2496~2575 | 3277~3381 | 32      |                                               |
|   | 1940~1960 | 1942~1960 | /         | 2576~2655 | 3382~3486 | 33      |                                               |
| P | 60        |           | 80        |           | 105       | /       |                                               |



请按图示订货

## ■LAA41-ANL15B-L200-Z0-C

| 代码    | 滑块型号   | 长度L | 预压     | 精度 |
|-------|--------|-----|--------|----|
| LAA41 | ANL15B | 200 | Z0:轻预压 | C  |



交期Delivery

3天

发货

○本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!