

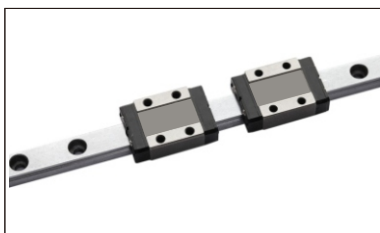
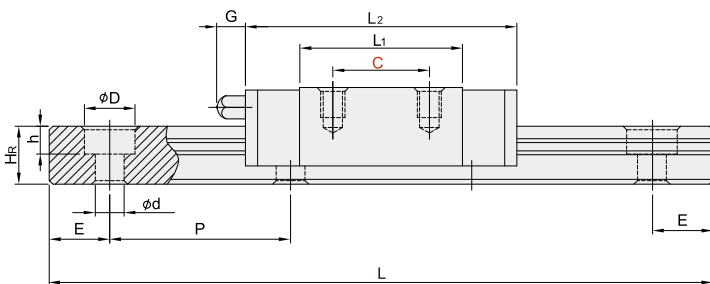


AA 微型直线导轨 ◀ ANN-C/ANN-H



代码	类型	滑块数量	材质	导轨固定方式
LBA01	组件	单滑块	合金钢	上锁式
LBA02		双滑块		
ALBA21	组件	单滑块	不锈钢	上锁式
ALBA22		双滑块		

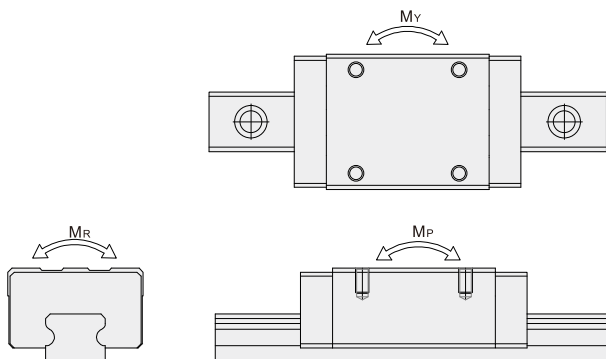

代码	型号	组装规格(mm)			滑块尺寸(mm)										导轨尺寸							
		H	H ₁	N	W	B	B ₁	C	L ₁	L ₂	G	G _n	M×L	H ₂	W _R	H _R	D	h	d	P	E	
LBA01	ANN7C	8	1.5	5	17	12	2.5	8	13.5	22.5	/	Ø1.2	M2×2.5	1.5	7	4.8	4.2	2.3	2.4	15	见 ANN 端距 参数 表	
	13							21.8	30.8													
LBA02	ANN9C	10	2	5.5	20	15	2.5	10	18.9	28.9	/	Ø1.3	M3×3	1.8	9	6.5	6	3.5	3.5	20		
ALBA21	ANN9H							16	29.9	39.9												
ALBA22	ANN12C	13	3	7.5	27	20	3.5	15	21.7	34.7	/	Ø1.4	M3×3.5	2.5	12	8	6	4.5	3.5	25		
	ANN12H							20	32.4	45.4												
	ANN15C	16	4	8.5	32	25	3.5	20	26.7	42.1	4.5	M3	M3×4	3	15	10	6	4.5	3.5	40		
	ANN15H							25	43.4	58.8												

代码	型号	滑轨的固定螺栓尺寸 (mm)	基本动额定负荷 C(KN)	基本静额定负荷 Co(KN)	容许静力矩			重量	
					Mr (kgf-m)	Mp (kN-m)	My (kN-m)	滑块kg	滑轨kg/m
LBA01	ANN7C	M2x6	0.98	1.24	4.7	2.84	2.84	0.01	0.22
	ANN7H		1.37	1.96	7.64	4.80	4.80	0.015	
LBA02	ANN9C	M3x8	1.86	2.55	11.76	7.35	7.35	0.016	0.38
	ANN9H		2.55	4.02	19.6	18.62	18.62	0.026	
ALBA21	ANN12C	M3x8	2.84	3.92	25.48	13.72	13.72	0.034	0.65
	ANN12H		3.72	5.88	38.22	36.26	36.26	0.054	
ALBA22	ANN15C	M3x10	4.61	5.59	45.08	21.56	21.56	0.059	1.06
	ANN15H		6.37	9.11	73.5	57.82	57.82	0.092	

AA 微小型直线导轨 ◀ ANN-C/ANN-H

代码	滑块型号	导轨形式	尺寸	滑块类型	预压	精度	代码	滑块型号	滑轨固定方式	导轨长度 L:mm	精度
LBA01 LBA02 ALBA21 ALBA22	ANN7C	ANN系列	7 9 12 15	C: 标准型 H: 加长型	ZF: 普通间隙 Z0: 无预压 Z1: 轻预压	C: 普通级 H: 高级 P: 精密级	LBA01 LBA02 ALBA21 ALBA22	ANN7C	R: 上锁式 T: 下锁式	1~4000	C: 普通级 H: 高级 P: 精密级
	ANN7H							ANN7H			
	ANN9C							ANN9C			
	ANN9H							ANN9H			
	ANN12C							ANN12C			
	ANN12H							ANN12H			
	ANN15C							ANN15C			
	ANN15H							ANN15H			

· ANN 端距参数 (安装孔数)

H	L 最小单位1	F 安装孔数	E
8 (P=15)	40~50	3	$E = [L - (F - 1) \times P] / 2$ P: 螺钉孔间距离 E: 螺钉中心孔至端面距离
	51~65	4	
	66~80	5	
	81~95	6	
	96~110	7	
	111~125	8	
	126~130	9	
	45~47	2	
10 (P=20)	48~67	3	
	68~87	4	
	88~107	5	
	108~127	6	
	128~147	7	
	148~167	8	
	168~187	9	
	188~207	10	
	208~227	11	
	228~247	12	
13 (P=25)	248~267	13	
	268~275	14	
	60~82	3	
	83~107	4	
	108~132	5	
	133~157	6	
	158~182	7	
	183~207	8	
	208~232	9	
	233~257	10	
	258~282	11	
	283~307	12	
	308~332	13	

· ANN 端距参数

H	L 最小单位1	F 安装孔数	E
13 (P=25)	333~357	14	$E = [L - (F - 1) \times P] / 2$ P: 螺钉孔间距离 E: 螺钉中心孔至端面距离
	358~382	15	
	383~407	16	
	408~432	17	
	433~457	18	
	458~470	19	
	70~87	2	
	88~127	3	
16 (P=40)	128~167	4	
	168~207	5	
	208~247	6	
	248~287	7	
	288~327	8	
	328~367	9	
	368~407	10	
	408~447	11	
	448~487	12	
	488~527	13	
	528~567	14	
	568~607	15	
	608~647	16	
	648~670	17	



请按图示订货

■ LBA01-ANN7C-R-L200-Z0-C

代码	滑块型号	滑轨固定方式	长度L	预压	精度
LBA01	ANN7C	R: 上锁式 T: 下锁式	200	Z0: 轻预压	C



交期Delivery

3天

发货

○本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!