




AA 微型直线导轨 ◀ ANW-C/ANW-H

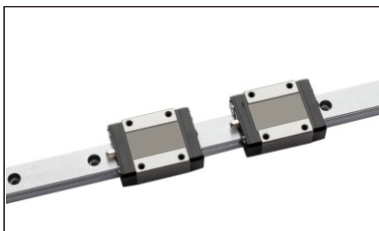


代码	类型	滑块数量	材质	导轨固定方式
LBA11	组件	单滑块	合金钢	上锁式
LBA12		双滑块		
ALBA31	组件	单滑块	不锈钢	上锁式
ALBA32		双滑块		

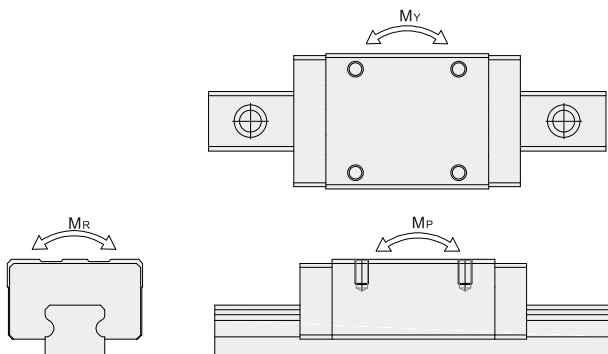

ANW7/ANW9/ANW12

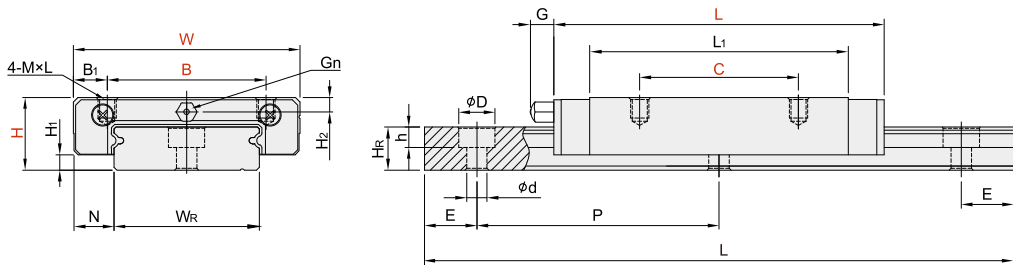

ANW15

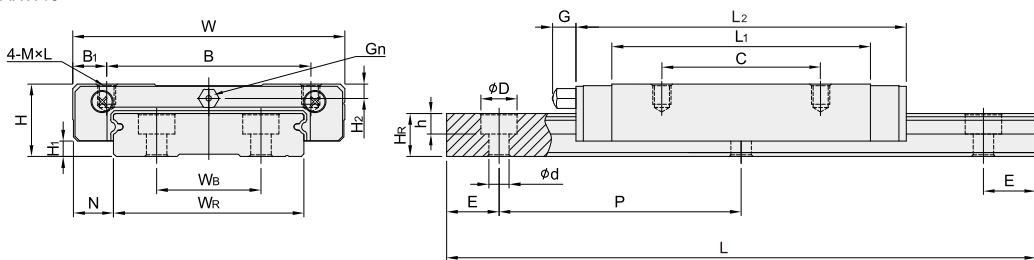

代码	型号	组装规格(mm)			滑块尺寸(mm)										导轨尺寸									
		H	H ₁	N	W	B	B ₁	C	L ₁	L ₂	G	G _n	M×L	H ₂	W _R	W _B	H _R	D	h	d	P	E		
LBA11 LBA12 ALBA31 ALBA32	ANW7C	9	1.9	5.5	25	19	3	10	21	31.2		Ø 1.2	M3×3	1.85	14	/	5.2	6	3.2	3.5	30	见 ANW 端距 参数 表		
	19							30.8	41															
	ANW9C	12	2.9	6	30	21	4.5	12	27.5	39.3	/	Ø 1.4	M3×3	2.4	18	/	7	6	4.5	3.5	30			
	ANW9H					23	3.5	24	38.5	50.7														
	ANW12C	14	3.4	8	40	28	6	15	31.3	46.1		Ø 1.4	M3×3.6	2.8	24	/	8.5	8	4.5	4.5	40			
	ANW12H							28	45.6	60.4														
	ANW15C	16	3.4	9	60	45	7.5	20	38	54.8	5.2	M3	M4×4.2	3.2	42	23	9.5	8	4.5	4.5	40			
	ANW15H							35	57.0	73.8														



代码	型号	滑轨的固定 螺栓尺寸 (mm)	基本动额定负荷 C(KN)	基本静额定负荷 Co(KN)	容许静力矩			重量	
					Mr (kgf-m)	Mp (kN-m)	Mv (kN-m)	滑块kg	滑轨kg/m
LBA11 LBA12 ALBA31 ALBA32	ANW7C	M3×6	1.37	2.06	15.7	7.14	7.14	0.02	0.51
	ANW7H		1.77	3.14	23.45	15.53	15.53	0.029	
	ANW9C		2.75	4.12	40.12	18.96	18.96	0.04	
	ANW9H	M3×8	3.43	5.89	54.54	34	34	0.057	0.91
	ANW12C		3.92	5.59	70.34	27.8	27.8	0.071	
	ANW12H		5.1	8.24	102.7	57.37	57.37	0.103	
	ANW15C	M4×10	6.77	9.22	199.34	56.66	56.66	0.0143	1.49
	ANW15H		8.93	13.38	299.01	122.60	122.60	0.215	

代码	滑块型号	导轨形式	尺寸	滑块类型	预压	精度
LBA11 LBA12 ALBA31 ALBA32	ANW7C	ANW系列	7	C: 标准型	ZF: 普通间隙 Z0: 无预压 ZI: 轻预压	C: 普通级 H: 高级 P: 精密级
	ANW7H					
	ANW9C					
	ANW9H					
	ANW12C		9	H: 加长型		
	ANW12H		12			
	ANW15C		15			
	ANW15H		15			

代码	滑块型号	滑轨固定方式	导轨长度 L:mm	精度		
LBA11 LBA12 ALBA31 ALBA32	ANW7C	R: 上锁式 T: 下锁式	1~4000	C:普通级 H:高级 P:精密级		
	ANW7H					
	ANW9C					
	ANW9H					
	ANW12C					
	ANW12H					
	ANW15C					
	ANW15H					

·ANW 端距参数

H	L 最小单位1	F 安装孔数	E
9 (P=30)	50~67	2	E=[L-(F-1)×P]/2 P: 螺钉孔间距离 E: 螺钉中心孔至端面距离
	68~97	3	
	98~127	4	
	128~157	5	
	158~187	6	
	188~217	7	
	218~247	8	
	248~277	9	
	278~290	10	
	50~67	2	
12 (P=30)	68~97	3	
	98~127	4	
	128~157	5	
	158~187	6	
	188~217	7	
	218~247	8	
	248~277	9	
	278~290	10	

·ANW 端距参数

H	L 最小单位1	F 安装孔数	E
14 (P=40)	70~89	2	E=[L-(F-1)×P]/2 P: 螺钉孔间距离 E: 螺钉中心孔至端面距离
	90~129	3	
	130~169	4	
	170~209	5	
	210~249	6	
	250~289	7	
	290~329	8	
	330~369	9	
	370~409	10	
	410~449	11	
16 (P=40)	450~470	12	
	70~89	2	
	90~129	3	
	130~169	4	
	170~209	5	
	210~249	6	
	250~289	7	
	290~329	8	
	330~369	9	
	370~409	10	
	410~449	11	
	450~489	12	
	490~529	13	
	530~569	14	
	570~609	15	
	610~649	16	
	650~670	17	



请按图示订货

■LBA11-ANW7C-R-L200-Z0-C

代码	滑块型号	滑轨固定方式	长度L	预压	精度
LBA11	ANW7C	R: 上锁式 T: 下锁式	200	Z0: 轻预压	C



交期Delivery

3天

发货

○本产品发货时间不含周日

