


AA 直线导轨 ◀ ANL-B/ANL-BL



代码	类型	滑块固定方式	滑块数量	材质	导轨固定方式
LAA41	组件	上锁式	单滑块	合金钢	上锁式
LAA42			双滑块		

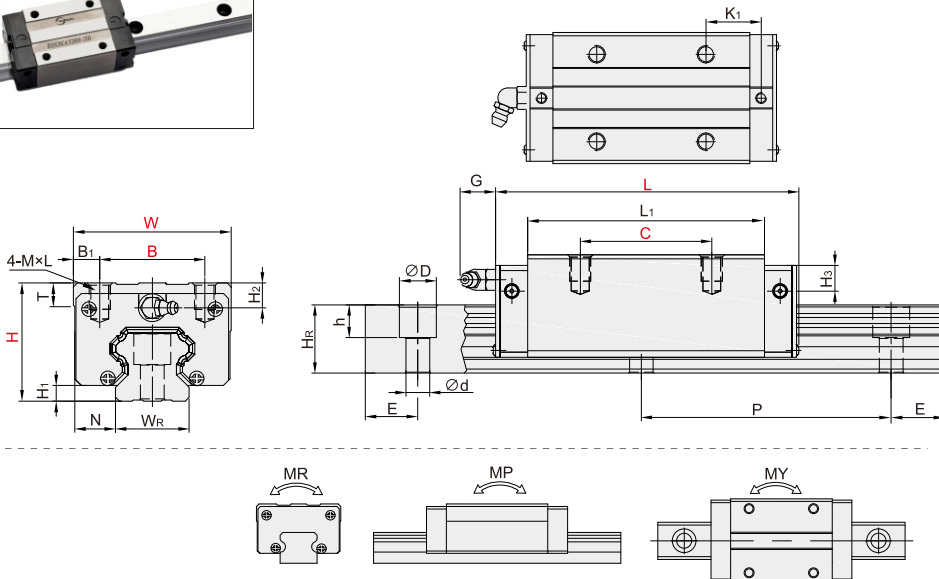

代码	滑块型号	组件尺寸 (mm)			滑块尺寸(mm)													导轨尺寸(mm)										导轨 固定螺栓 尺寸 (mm)	基本 动额定 负荷 C(kN)
		H	H1	N	W	B	B1	C	L1	L	K1	G	MxL	T	H2	H3	W _R	H _R	D	h	d	P	E						
LAA41 LAA42	ANL15B	24	4.3	9.5	34	26	4	26	39.4	61.4	10	5.3	M4x4	6	3.95	3.7	15	15	7.5	5.3	4.5	60	20	M4x16	11.38				
	ANL25B	36	5.5	12.5	48	35	6.5	35	58	84	16.8	12	M6x6	8	6	9	23	22	11	9	7	60	20	M6x20	26.48				
	50							78.6	104.6	19.6	32.75																		
	ANL30B	42	6	16	60	40	10	40	70	97.4	20.25	12	M8x10	8.5	6.5	10.8	28	26	14	12	9	80	20	M8x25	38.74				
	60							93	120.4	21.75	47.27																		
	ANL35B	48	7.5	18	70	50	10	50	80	112.4	20.6	12	M8x12	10.2	9	12.6	34	29	14	12	9	80	20	M8x25	49.52				
	72							105.8	138.2	22.5	60.21																		
	ANL45B	60	9.5	20.5	86	60	13	60	97	139.4	23	12.9	M10x17	16	8.5	20.5	45	38	20	17	14	105	22.5	M12x35	77.57				
	80							128.8	171.2	28.9	94.54																		
	ANL55B	70	13	23.5	100	75	12.5	75	117.7	166.7	27.35	12.9	M12x18	17.5	12	19	53	44	23	20	16	120	30	M14x45	114.44				
	95							155.8	204.8	36.4	139.35																		

代码	滑块型号	基本 静额定负荷 C ₀ (kN)	容许静力矩			重量		导轨形式	尺寸	滑块类型	预压	精度	导轨长度 L:mm
			MR kN·m	Mp kN·m	My kN·m	滑块 (kg)	导轨 (kg/m)						
LAA41 LAA42	ANL15B	25.31	0.17	0.15	0.15	0.14	1.45	ANL系列	15 25 30 35 45 55	B: 四方型; BL: 四方加长型;	Z0: 轻预压 ZA: 中预压 ZB: 重预压	C:普通级 H:高级 P:精密级	1~4000
	ANL25B	56.19	0.64	0.51	0.51	0.42	3.21						
	ANL25BL	76.00	0.87	0.88	0.88	0.57	4.47						
	ANL30B	83.06	1.06	0.85	0.85	0.78							
	ANL30BL	110.13	1.40	1.47	1.47	1.03	6.30						
	ANL35B	102.87	1.73	1.20	1.20	1.14							
	ANL35BL	136.31	2.29	2.08	2.08	1.52							
	ANL45B	155.93	3.01	2.35	2.35	2.08	10.41						
	ANL45BL	207.12	4.00	4.07	4.07	2.75							
	ANL55B	227.81	5.66	4.06	4.06	3.25							
	ANL55BL	301.26	7.49	7.01	7.01	4.27							



请按图示订货

■ LAA41-ANL15B-L200-C-Z0

代码	滑块型号	长度L	精度	预压
LAA41	ANL15B	200	C	Z0



交期Delivery

3天

发货

○本产品发货时间不含周日