


线性导向轴 ◀ 两端内螺纹带扳手槽型 · 标准型/精密型

	代码	类型	D 公差	材质	硬度	表面处理
	EGBJ52	标准型	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度 HRC54~60	镀硬铬， 镀层硬度HV850~， 镀层厚度3~5μm
	EGBJ57			GB:9Cr18Mo JIS:相当于SUS440C		
	EGBJ62			GB:45 JIS:相当于S45C		
	EGBJ72	GB:GCr15 JIS:相当于SUJ2		精密型		
	EGBJ77	GB:9Cr18 JIS:相当于SUS440C				

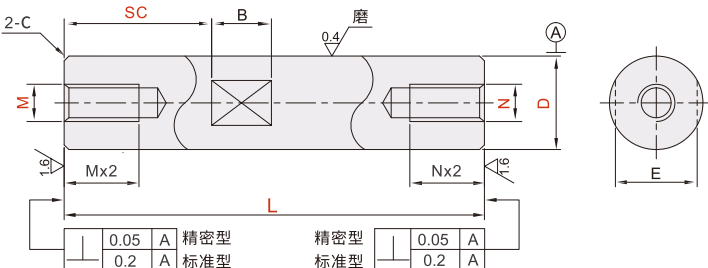

	0.05	A	精密型
	0.2	A	标准型

	0.05	A	精密型
	0.2	A	标准型

型号			L(最小单位1)	M · N(粗牙螺纹)	扳手槽尺寸			C
代码	Dg6				SC	E	B	
标准型 EGBJ52 EGBJ57 EGBJ62	6	-0.004 -0.012	15~600	3	最小单位 1mm	5	8	0.5
	8	-0.005 -0.014	15~800	3 4 5		7		
	10			3 4 5 6		8		
	12		4 5 6 8	10				
	13		20~1000	4 5 6 8		11		
	15	-0.006 -0.017	25~1200	4 5 6 8 10		13	10	
	16			4 5 6 8 10		14		
	18			4 5 6 8 10 12		16		
	20			4 5 6 8 10 12		17		
	25	-0.007 -0.020	30~1200	4 5 6 8 10 12 16		22	16	
	30		4 5 6 8 10 12 16 20	27				
	35		30~1500	4 5 6 8 10 12 16 20 24		30		
	40		50~1500	4 5 6 8 10 12 16 20 24 30		36		
	50	4 5 6 8 10 12 16 20 24 30		41		20		

型号			L(最小单位1)	M · N(粗牙螺纹)	扳手槽尺寸			C
代码	Dg6				SC	E	B	
精密型 EGBJ72 EGBJ77	6	-0.004 -0.012	20~300	3	最小单位 1mm	5	8	0.2
	8	-0.005		3 4 5		7		
	10	-0.014		3 4 5 6		8		
	12	-0.006 -0.017	4 5 6 8	10				
	13		4 5 6 8	11				
	15		4 5 6 8 10	13				
	16		4 5 6 8 10	14				
	18		4 5 6 8 10 12	16				
	20	25~450	4 5 6 8 10 12	17		10		
	25		4 5 6 8 10 12 16	22				
	30		4 5 6 8 10 12 16 20	27			16	



请按图示订货

■ EGBJ72-D6-L100-M3-N3-SC15

型号			L(最小单位1)	M · N (粗牙螺纹)	SC
代码	Dg6				
EGBJ72	6	-0.004 -0.012	20~300	3	SC (最小单位1mm)



交期Delivery

4 天

发货

○本产品发货时间不含周日