


线性导向轴 ◀ 一端外螺纹带扳手槽型 · 标准型/精密型



代码		D 公差	材质	硬度	表面处理
标准型	精密型				
EGBA52	EGBA72	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有 有效硬化层 淬火 硬度 淬火硬度: HRC54~60	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBA57	EGBA77		GB:9Cr18Mo JIS:相当于SUS440C		

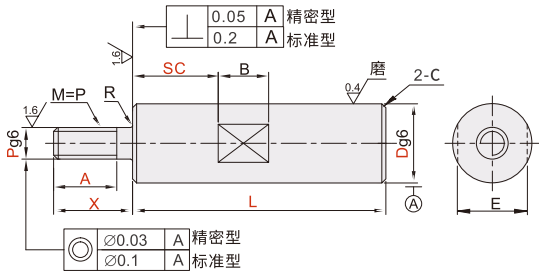

导
向
轴

01

型号			最小单位1			P 选择			扳手槽尺寸			C			
代码	Dg6		L	X	A				SC	E	B				
标准型 EGBA52 EGBA57	6	-0.004 -0.012	20~600	X=2~P×5	根据使用 要求指定	3	4	5	最小单位 1mm	5	8	0.5			
	8	-0.005	20~800			3	4	5		6			7		
	10	-0.014	20~800			4	5	6		8			8		
	12		20~1000			5	6	8		10			10		
	13		20~1000			5	6	8		10			12	11	
	15	-0.006 -0.017	20~1000			5	6	8		10			12	13	
	16		20~1200			5	6	8		10	12		14	10	
	18		20~1200			5	6	8		10	12		16		16
	20		20~1200			6	8	10		12	16		17		16
	25	-0.007 -0.020	20~1200			8	10	12		16	20		24		
	30		20~1500			8	10	12		16	20	24	27		
	35		20~1500			10	12	16		20	24	30	30	1	
	40	-0.009 -0.025	20~1500			12	16	20		24	30	36	20		
	50		20~1500			16	20	24		30	41				
精密型 EGBA72 EGBA77	6	-0.004 -0.012	20~300	X=2~P×5	根据使用 要求指定	3	4		最小单位 1mm	5	8	0.2			
	8	-0.005	20~300			3	4	5		6			7		
	10	-0.014	20~350			4	5	6		8			8		
	12		20~350			5	6	8		10	10		10		
	13		20~350			5	6	8		10	11				
	15	-0.006 -0.017	20~350			5	6	8		10	12			13	
	16		20~350			5	6	8		10	12			14	
	18		20~350			5	6	8		10	12			16	16
	20		25~450			6	8	10		12	16			17	16
	25	-0.007 -0.020	25~450			8	10	12		16	20			22	
	30		25~450			8	10	12		16	20		24	27	



请按图示订货

■ EGBA72-D6-L150-X12-A8-P3-SC30

型号		最小单位1			P 选择	SC
代码	Dg6	L	X	A		
EGBA72	6 -0.004 -0.012	20~300	X=2~P×5	根据使用 要求指定	3 4	最小单位 1mm



交期Delivery

4 天 发货

○本产品发货不含周日



www.vipdo.cn 400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！