

线性导向轴 ◀ 两端外螺纹型 · 标准型/精密型/同径型





代码			D 公差	材质	硬度	表面处理
标准型	精密型	同径型				
EGBQ52	EGBQ72	EGBR52	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有 有效硬化层 淬火 硬度	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBQ57	EGBQ77	EGBR57		GB:9Cr18Mo JIS:相当于SUS440C	淬火硬度: HRC54~60	

标准型
EGBQ52/57

精密型
EGBQ72/77

同径型
EGBR52/57

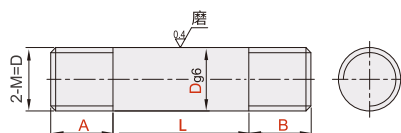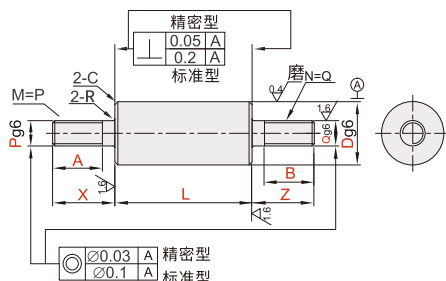

型号			最小单位1			P·Q 选择	R	C	
代码	Dg6		L	X·Z	A·B				
标准型 EGBQ52 EGBQ57	4	-0.004	20~300	X=2~P×5 Z=2~Q×5	根据使用 要求指定	3	0.2	0.5	
	5	-0.012	20~400			3 4			
	6	-0.012	20~600			3 4 5			
	8	-0.005	20~800			3 4 5 6			
	10	-0.014				4 5 6 8			
	12	-0.006 -0.017				5 6 8 10 12			
	13		5 6 8 10 12						
	15		5 6 8 10 12						
	16		5 6 8 10 12 16						
	18	20~1200	6 8 10 12 16						
	20		8 10 12 16						
	25		8 10 12 16 20 24						
	30		8 10 12 16 20 24						
	35	-0.007 -0.020	20~1500			10 12 16 20 24 30	0.5		1
	40	-0.025				12 16 20 24 30			
	50					16 20 24 30			
精密型 EGBQ72 EGBQ77	5	-0.004		20~300	X=2~P×5 Z=2~Q×5	根据使用 要求指定	3	0.2	
	6	-0.012	20~350	3 4			0.3		
	8	-0.005		3 4 5 6					
	10	-0.014		4 5 6 8					
	12	-0.006 -0.017		5 6 8 10					
	13			5 6 8 10					
	15			5 6 8 10 12					
	16		5 6 8 10 12						
	18	25~450	5 6 8 10 12 16						
	20		6 8 10 12 16						
	25		8 10 12 16 20						
	30		8 10 12 16 20 24						

型号			最小单位1		M
代码	Dg6		L	A·B	
同径型 EGBR52 EGBR57	4	-0.004	20~300	4~20	4
	5	-0.012	20~400	4~25	5
	6		20~600	5~30	6
	8	-0.005	20~800	7~40	8
	10	-0.014		5~50	10
	12	-0.006	20~1000	9~60	12
	16	-0.017	20~1200	10~80	16
	20	-0.007		13~100	20
	30	-0.020	20~1500	18~150	30



请按图示订货

■ EGBR52-D4-L200-A15-B15

型号		L	A·B
代码	Dg6		
EGBR52	4	-0.004 -0.012	20~300
			4~20



交期Delivery

4 天

发货

○本产品发货时间不含周日