


线性导向轴 ◀ 一端外螺纹带扳手槽型 · 标准型/精密型



代码		D 公差	材质	硬度	表面处理
标准型	精密型				
GBA51	GBA71	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度 GCr15 ,HRC56~ S45C HRC56~ 9Cr18Mo HRC54~	/
GBA52	GBA72				镀硬铬，镀层硬度HV850~， 镀层厚度3~5μm
GBA56	GBA76		GB:9Cr18Mo JIS:相当于SUS440C		/
GBA57	GBA77				镀硬铬，镀层硬度HV850~， 镀层厚度3~5μm

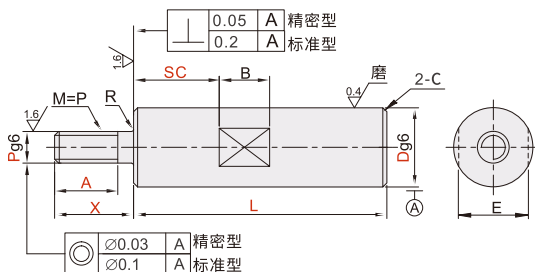

导
向
轴

01

型号			最小单位1			P 选择			扳手槽尺寸			C		
代码	Dg6		L	X	A				SC	E	B			
标准型 GBA51 GBA52 GBA56 GBA57	6	-0.004 -0.012	20~600	X=2~P×5	根据使用 要求指定	3	4	5	最小单位 1mm	5	9	0.5		
	8	-0.005	20~800			3	4	5		6			7	
	10	-0.014	20~800			4	5	6		8			8	
	12		20~1000			5	6	8		10			10	
	13		20~1000			5	6	8		10	12		11	
	15	-0.006 -0.017	20~1000			5	6	8		10	12		13	
	16		20~1200			5	6	8		10	12		14	
	18		20~1200			5	6	8		10	12		16	
	20	-0.007 -0.020	20~1200			6	8	10		12	16	17		
	25		20~1200			8	10	12		16	20	24	22	
	30		20~1500			8	10	12		16	20	24	27	
	35		20~1500			10	12	16		20	24	30	16	
	40	-0.009 -0.025	20~1500			12	16	20		24	30	36		
	50		20~1500			16	20	24		30	41	21		
	精密型 GBA71 GBA72 GBA76 GBA77	6	-0.004 -0.012			20~300	X=2~P×5	根据使用 要求指定		3	4			最小单位 1mm
8		-0.005	20~300	3	4	5			6	7				
10		-0.014	20~350	4	5	6			8	8				
12			20~350	5	6	8			10	10				
13		-0.006 -0.017	20~350	5	6	8			10	11				
15			20~350	5	6	8			10	12	13			
16			20~350	5	6	8			10	12	14			
18			20~350	5	6	8			10	12	16			
20		-0.007 -0.020	25~450	6	8	10			12	16	17			
25			25~450	8	10	12			16	20	22			
30			25~450	8	10	12			16	20	24	27		
												16		



请按图示订货

■ GBA71-D6-L150-X12-A8-P3-SC30

型号		最小单位1			P 选择		SC
代码	Dg6	L	X	A			
GBA71	6	-0.004 -0.012	20~300	X=2~P×5	根据使用 要求指定	3 4	最小单位 1mm



交期Delivery

4 天 发货

○本产品发货不含周日



www.vipdo.cn 400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!