


微型滚珠衬套导向组件用衬套 ◀ 法兰型/带安装孔型



代码	类型		材质	硬度
ALOM81	法兰型	带安装孔型	SUJ2	58HRC~
ALOM86			SUS440C	56HRC~

注:规格为适配的轴径大小,需搭配轴(代码LOF/LOG/LOH/LOJ)、滚珠滑套(代码LOQ)使用,不建议直接与轴适配,

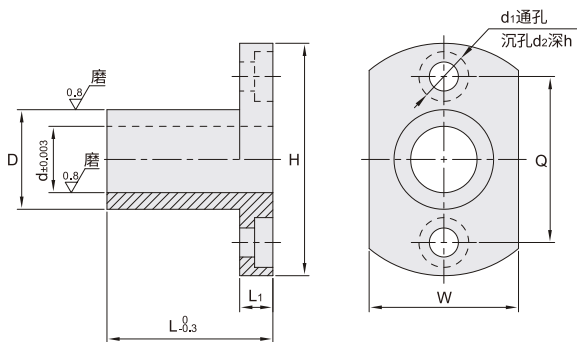

型号		L		D		d	H	W	Q	L ₁	d ₁	d ₂	h
代码	规格												
ALOM81 ALOM86	5	20	10	0 -0.006	7	25	16	17	4	3.5	6	2.2	
		30											
	6	20	12	0 -0.011	8	28	18	20					
		30											
		40											
	8	20	14		10	29	20	21					
		30											
		40											
	10	30	16		12	34	22	25	5	4.5	7.5	3	
		40											
		50											
	12	30	19		14	40	25	29					
		40											
		50											



请按图示订货

ALOM81-5-L20-D10

型号		L	D
代码	规格		
ALOM81	5	20	10



交期Delivery

5天

发货

○本产品发货时间不含周日

