

窄型继电器插座






代码	规格	额定电流
JDUB01	RY1S-05B	6A
	RY2S-05B	8A
	RY2S-05E	
	RY1S-05E	12A




外形及安装尺寸

RY41F-1Z-C4




接线图

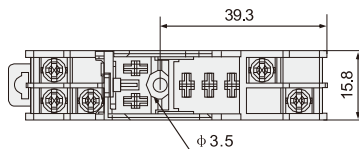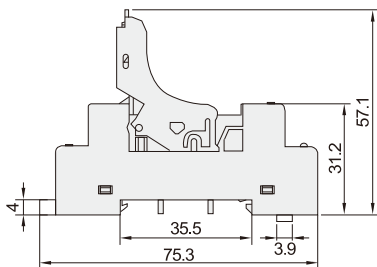




RY2S-05B

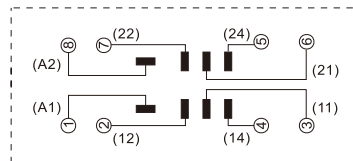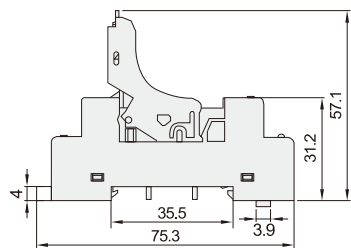

RY2S-05E

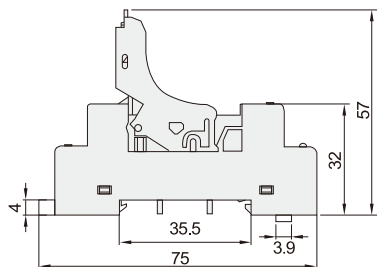

RY1S-05E

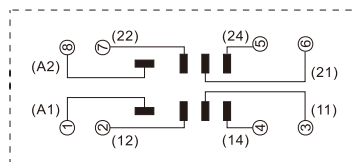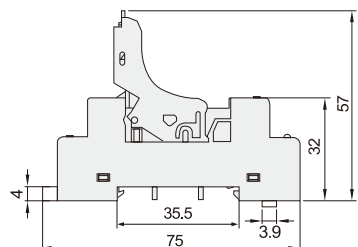

窄型继电器插座

代码		JDUB01				
产品型号		RY41F-1Z-C4	RY1S-05B	RY2S-05B	RY1S-05E	RY2S-05E
工作负载	电流	6A	6A	8A	12A	8A
	电压	300VAC	300VAC	300VAC	300VAC	300VAC
绝缘电压		2500V/S	2500V/S	2500V/S	2500V/S	2500V/S
使用环境		-40°C~+70°C	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C
螺丝大小		M3	M3	M3	M3	M3
插拔寿命		1×10 ⁴	1×10 ⁴	1×10 ⁴	1×10 ⁴	1×10 ⁴
适用电线		min.0.5mm ² max.2.5mm ²	min.0.5mm ² max.2.5mm ²	min.0.5mm ² max.2.5mm ²	min.0.5mm ² max.2.5mm ²	min.0.5mm ² max.2.5mm ²
外壳塑料		阻燃环保PBT+GF20				



请按图示订货

JDUB01-RY41F-1Z-C4

代码

产品型号

JDUB01

RY41F-1Z-C4



交期Delivery

5天

发货

○本产品发货时间不含周日

