


工业滑轨




代码	类型	宽度	材质	表面处理
VZF01	三段式	35.3	Q235	镀锌蓝白
VZF02			SUS304	\

VZF01 (可互锁型)

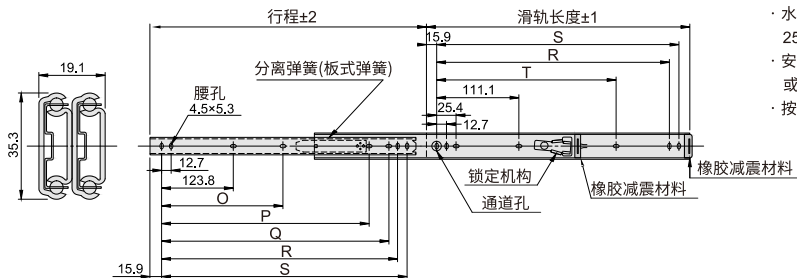

VZF02 (可互锁型)

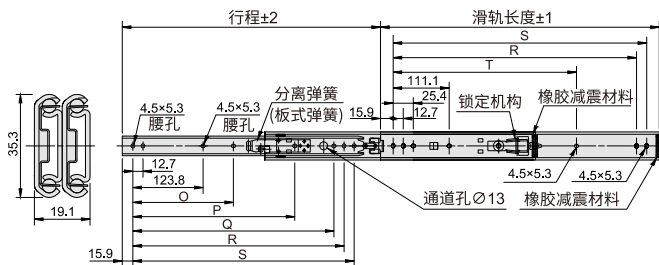

型号		行程	O	P	Q	R	S	T	承重(1副)	参考重量 (kg/pcs)	
代码	滑轨长度										
VZF01	305	327.2	\	\	247.6	260.3	273	\	63.6kgf	0.78	
	356	377.9			298.4	311.1	323.8		59.8kgf	0.9	
	406	428.7			349.2	361.9	374.6		250.8	56.6kgf	1.03
	457	479.5			212.7	400	412.7		425.4	301.6	52.7kgf
	508	530.3	238.1	365.1	450.8	463.5	476.2	352.4	48.6kgf	1.21	
	559	581.2	263.5	415.9	501.6	514.3	527	403.2	45.3kgf	1.28	
	610	631.9	288.9	466.7	552.4	565.1	577.8	454	42.1kgf	1.35	
	660	682.7	314.3	517.5	603.2	615.9	628.6	504.8	39.0kgf	1.43	
	711	733.5	339.7	568.3	654	666.7	679.4	555.6	36.2kgf	1.52	
VZF02	300	322.3	\	\	242.8	255.5	268.2	\	63.6kgf	0.7	
	350	372.3			292.8	305.5	318.2		59.8kgf	0.84	
	400	422.3			342.88	355.5	368.2		244.4	56.6kgf	0.95
	450	472.3			205.5	392.8	405.5		418.2	294.4	52.7kgf
	500	522.3	230.5	357.1	442.8	455.5	468.2	344.4	48.6kgf	1.22	
	550	572.3	255.5	407.1	492.8	505.5	518.2	394.4	45.3kgf	1.33	
	600	622.3	280.5	457.1	542.8	555.5	568.2	444.4	42.1kgf	1.44	
	650	672.3	305.5	507.1	592.8	605.5	618.2	494.4	39.0kgf	1.52	
	700	722.3	330.5	557.1	642.8	655.5	668.2	544.4	36.2kgf	1.63	

