


花键／支座组件
滚珠丝杆



代码	技术说明
----	------

	增加固定侧轴端键槽 	选型方法 HG30 ●最小单位1 ●键槽宽<HG值≤50 <table border="1" data-bbox="1039 906 1238 977"> <thead> <tr> <th>P</th><th>b</th><th>t</th></tr> </thead> <tbody> <tr> <td>25~30</td><td>8_{-0.036}⁰</td><td>4₀^{+0.1}</td></tr> <tr> <td>31~38</td><td>10</td><td>5</td></tr> </tbody> </table>	P	b	t	25~30	8 _{-0.036} ⁰	4 ₀ ^{+0.1}	31~38	10	5
P	b	t									
25~30	8 _{-0.036} ⁰	4 ₀ ^{+0.1}									
31~38	10	5									
	增加固定侧轴端键槽 	选型方法 HH7~S2 ●最小单位1 ●HH值+S值≤50, 键槽宽<HH值 <table border="1" data-bbox="1039 1161 1238 1234"> <thead> <tr> <th>P</th><th>b</th><th>t</th></tr> </thead> <tbody> <tr> <td>25~30</td><td>8_{-0.036}⁰</td><td>4₀^{+0.1}</td></tr> <tr> <td>31~38</td><td>10</td><td>5</td></tr> </tbody> </table>	P	b	t	25~30	8 _{-0.036} ⁰	4 ₀ ^{+0.1}	31~38	10	5
P	b	t									
25~30	8 _{-0.036} ⁰	4 ₀ ^{+0.1}									
31~38	10	5									
	增加固定侧轴端平面(1处) 	选型方法 HJ10 ●最小单位1 ●5≤HJ值≤50									
	增加固定侧轴端平面(2处)  位置90°	选型方法 HK10 ●最小单位1 ●5≤HK值≤50									

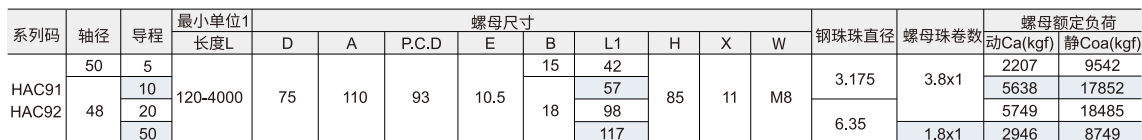