

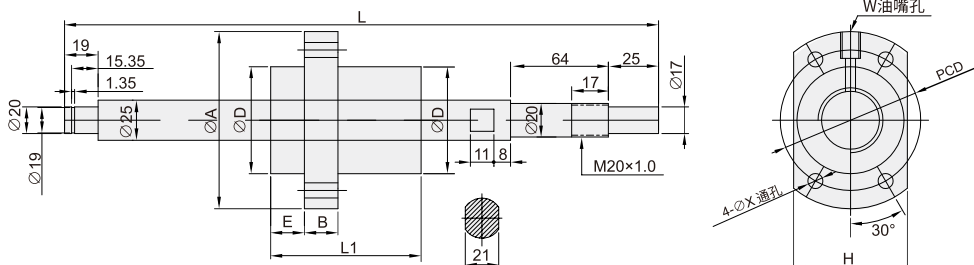




花键／支座组件  
滚珠丝杆



可选加工

| 代码    | 技术说明                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                            |   |   |   |       |                                 |                                  |       |   |   |
|-------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|-------|---------------------------------|----------------------------------|-------|---|---|
| HF    | 增加固定侧轴端扳手位                                                                                                    | <div>选型方法 HF</div>                                                                                                                                                                                                                                                                                                                                                         |   |   |   |       |                                 |                                  |       |   |   |
| HG( ) | 增加固定侧轴端键槽<br>              | <div>选型方法 HG20</div> <ul style="list-style-type: none"> <li>●最小单位1</li> <li>●键槽宽&lt;HG值≤25</li> </ul> <table border="1"> <thead> <tr> <th>P</th><th>b</th><th>t</th></tr> </thead> <tbody> <tr> <td>11~12</td><td>4<sup>0</sup><sub>-0.03</sub></td><td>2.5<sup>+0.1</sup><sub>0</sub></td></tr> <tr> <td>13~17</td><td>5</td><td>3</td></tr> </tbody> </table>            | P | b | t | 11~12 | 4 <sup>0</sup> <sub>-0.03</sub> | 2.5 <sup>+0.1</sup> <sub>0</sub> | 13~17 | 5 | 3 |
| P     | b                                                                                                             | t                                                                                                                                                                                                                                                                                                                                                                          |   |   |   |       |                                 |                                  |       |   |   |
| 11~12 | 4 <sup>0</sup> <sub>-0.03</sub>                                                                               | 2.5 <sup>+0.1</sup> <sub>0</sub>                                                                                                                                                                                                                                                                                                                                           |   |   |   |       |                                 |                                  |       |   |   |
| 13~17 | 5                                                                                                             | 3                                                                                                                                                                                                                                                                                                                                                                          |   |   |   |       |                                 |                                  |       |   |   |
| HH( ) | 增加固定侧轴端键槽<br>              | <div>选型方法 HH20-S3</div> <ul style="list-style-type: none"> <li>●最小单位1</li> <li>●HH值+S值≤25, 键槽宽&lt;HH值</li> </ul> <table border="1"> <thead> <tr> <th>P</th><th>b</th><th>t</th></tr> </thead> <tbody> <tr> <td>11~12</td><td>4<sup>0</sup><sub>-0.03</sub></td><td>2.5<sup>+0.1</sup><sub>0</sub></td></tr> <tr> <td>13~17</td><td>5</td><td>3</td></tr> </tbody> </table> | P | b | t | 11~12 | 4 <sup>0</sup> <sub>-0.03</sub> | 2.5 <sup>+0.1</sup> <sub>0</sub> | 13~17 | 5 | 3 |
| P     | b                                                                                                             | t                                                                                                                                                                                                                                                                                                                                                                          |   |   |   |       |                                 |                                  |       |   |   |
| 11~12 | 4 <sup>0</sup> <sub>-0.03</sub>                                                                               | 2.5 <sup>+0.1</sup> <sub>0</sub>                                                                                                                                                                                                                                                                                                                                           |   |   |   |       |                                 |                                  |       |   |   |
| 13~17 | 5                                                                                                             | 3                                                                                                                                                                                                                                                                                                                                                                          |   |   |   |       |                                 |                                  |       |   |   |
| HJ( ) | 增加固定侧轴端平面(1处)<br>          | <div>选型方法 HJ20</div> <ul style="list-style-type: none"> <li>●最小单位1</li> <li>●5≤HJ值≤25</li> </ul>                                                                                                                                                                                                                                                                           |   |   |   |       |                                 |                                  |       |   |   |
| HK( ) | 增加固定侧轴端平面(2处)<br><br>位置90° | <div>选型方法 HK5</div> <ul style="list-style-type: none"> <li>●最小单位1</li> <li>●5≤HK值≤25</li> </ul>                                                                                                                                                                                                                                                                            |   |   |   |       |                                 |                                  |       |   |   |



| 型号    |    | 导程 | 最小单位1    |
|-------|----|----|----------|
| 系列码   | 轴径 |    | 长度L      |
| HAH21 | 25 | 25 | 100-2000 |



发货

○本产品发货时间不含周日