



实心滚珠花键


◀ 圆筒螺母型/标准型



圆筒螺母型
HLF01

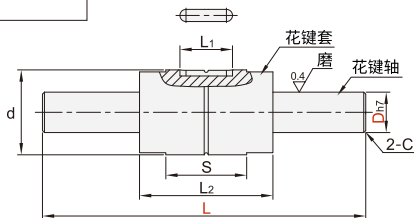


D≤20 (2列滚珠)




D≥25 (4列滚珠)


圆法兰螺母型
HLT06

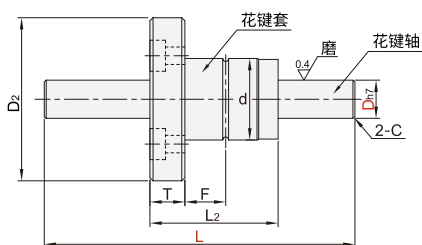


D=6/10/13
(2列滚珠)



D=8/16/20
(2列滚珠)



D=25/30
(4列滚珠)



■圆筒螺母型

型号	花键轴				花键母							基本额定 负载(kgf)		基本额定 扭矩(kgfm)		容许静力矩 (kgfm)		重量		
	代码	Dh7	L 最小单位1	滚珠 列数	C 倒角	d	L ₁	L ₂	S	O 油孔	键槽尺寸							母	轴	
											b	t	C	Co	Cr	Co _r	MA ₁			MA ₂
HLF01	6	⁰ _{-0.015}	60~500	2	0.2	14	10.5	25	16.7	1	2.5	1.2	137	225	0.46	0.76	0.39	3.48	14	0.22
	8					16		27	15.7					0.6	0.99	3.82		16	0.39	
	10	⁰ _{-0.018}	60~700			21	13	33	20	1.5	3	1.5	285	397	1.62	2.25	0.95	8.53	37	0.6
	13					24	15	36	23				396	540	2.89	3.94	1.5	12.46	52	1.03
	16		70~700	31	17.5	50	34	2	3.5	2	545	849	4.77	7.43	3.71	26.09	130	1.56		
	20	⁰ _{-0.021}	80~800	35	29	56	39.7				724	1109	7.9	12.09	5.53	38	188	2.44		
	25		90~1000	42	36	71	50.3	4	2.5	1003	1593	21.99	43.01	10.35	68.59	285	3.8			
	30	⁰ _{-0.025}	100~1250	4	1	47	42			80	60	3	1160	1980	30.26	62.93	15.68	93.27	395	5.49

■容许静力矩MA1为使用1个螺帽时的数值；MA2为使用2个紧密接触的螺帽时的数值。

■圆法兰螺母型

型号	花键轴				花键套								基本额定 负载(kgf)		基本额定 扭矩(kgfm)		容许静力矩 (kgfm)		重量	
	代码	Dh7	L 最小单位1	滚珠 列数	C 倒角	d	L2	D2	T	F	油孔 P.C.D	安装孔 X Y Z	C	Co	Cr	Cor	MA1	MA2	母 g	轴 kg/m
HLT06	6	0 -0.015	60~500	2	0.2	14	25	30	6	7.5	1	22	137	225	0.46	0.76	0.39	3.48	36.7	0.22
	8					16	27	32	8		24	3.4	6.5	4.5	0.6	0.99		3.82	47	0.39
	10					21	33	42	9	10.5	1.5	32	285	397	1.62	2.25	0.95	8.53	100	0.6
	13	0 -0.018	60~700			24	36	44	11		33	4.5	8	4	396	540	2.89	3.94	117	1.03
	16		70~700	4	1.0	31	50	51	10	18	2	40	545	849	4.77	7.43	3.71	26.09	226	1.56
	20	0 -0.021	80~800			35	56	58			42	5.5	9.5	5.4	724	1109	7.9	12.09	303	2.44
	25		90~1000			42	71	65		26.5	52	8	1003	1593	21.99	43.01	10.35	68.59	458	3.8
	30	0 -0.025	100~1250			47	80	75	13	30	3	6.6	11	8	1160	1980	30.26	62.93	633	5.49

■容许静力矩MA1为使用1个螺帽时的数值；MA2为使用2个紧密接触的螺帽时的数值。



请按图示订货

■ HLF01-D6-L60

型号		L	
代码	D	最小单位1	
HLF01	6	60~500	



交期Delivery

7天

发货

○本产品发货时间不含周日