




实心滚珠花键 ◀ 圆筒螺母型/一端内螺纹型



代码	类型	D公差	材质				硬度
			花键轴		花键母		
			国标	相当于	国标	相当于	
HLF21	圆筒螺母型	h7	55	S55C	GCr15	SUJ2	高频淬火58~62HRC
HLT26	圆法兰螺帽型	h7	55	S55C	GCr15	SUJ2	高频淬火58~62HRC

6.3


圆筒螺母型
HLF21

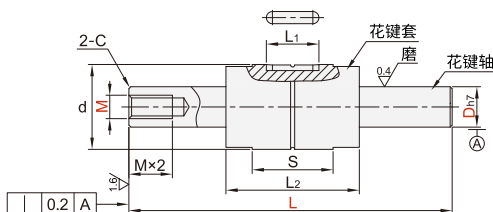

D≤20 (2列滚珠)

D≥25 (4列滚珠)




圆法兰螺母型
HLT26

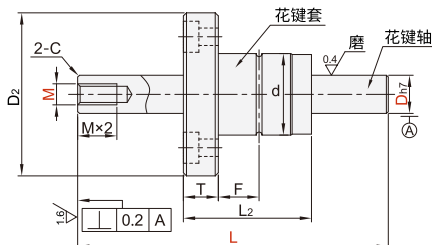

D=6/10/13
(2列滚珠)

D=8/16/20
(2列滚珠)

D=25/30
(4列滚珠)



■ 圆筒螺母型

型号	花键轴						花键母						基本额定 负载(kgf)		基本额定 扭矩(kgfm)		容许静力矩 (kgfm)		重量		
代码	Dh7	L 最小单位1	M	滚珠 列数	C 倒角	d	L ₁	L ₂	S	O 油孔	键槽 尺寸		C	C _o	C _r	C _{or}	M _{A1}	M _{A2}	花键		
											b	t							kgf	kgfm	g
HLF21	6	0 -0.015	60~500	3	3	0.5	14	10.5	25	16.7	1	2.5	1.2	137	225	0.46	0.76	0.39	3.48	14	0.22
	8		3 4 5	16				27	15.7												
	10	0 -0.018	60~700	3 4 5 6			21	13	33	20	1.5	3	1.5	285	397	1.62	2.25	0.95	8.53	37	0.6
	13			4 5 6 8			24	15	36	23				396	540	2.89	3.94	1.5	12.46	52	1.03
	16		70~700	4 5 6 8 10	31	17.5	50	34	2	3.5	2	545	849	4.77	7.43	3.71	26.49	130	1.56		
	20	0 -0.021	80~800	4 5 6 8 10 12	35	29	56	39.7				724	1109	7.9	12.09	5.53	38	188	2.44		
	25			90~1000	4 5 6 8 10 12 16	42	36	71	50.3	3	4	2.5	1003	1593	21.99	43.01	10.35	68.59	285	3.8	
	30	0 -0.025	100~1250	4 5 6 8 10 12 16 20	47	42	80	60	1160				1980	30.26	62.93	15.68	93.27	395	5.49		

■ 容许静力矩MA1为使用1个螺帽时的数值;MA2为使用2个紧密接触的螺帽时的数值。

■ 圆法兰螺母型

型号	花键轴						花键母								基本额定 负载(kgf)		基本额定 扭矩(kgfm)		容许静力矩 (kgfm)		重量				
代码	Dh7	L 最小单位1	M	滚珠 列数	C 倒角	d	L ₂	D ₂	T	F	O 油孔	P. C. D	安装孔			C	Co	Cr	Cor	Ma ₁	Ma ₂	花键			
													X	Y	Z							母	轴		
HLT26	6	0-0.015	60~500	3	2	0.5	14	25	30	6	7.5	1	22	3.4	6.5	4.5	137	225	0.46	0.76	0.39	3.48	36.7	0.22	
	8		3 4 5	16			27	32	8			24													
	10		0-0.018	60~700			3 4 5 6	21	33	42	9	10.5	1.5	32	4.5	8	4	285	397	1.62	2.25	0.95	8.53	100	0.6
	13	4 5 6 8		24			36	44		11	33														
	16	0-0.021	70~700	4 5 6 8 10	4	1.0	31	50	51	10	18	2	40	5.4	9.5	8	6	545	849	4.77	7.43	3.71	26.09	226	1.56
	20		80~800	4 5 6 8 10 12			35	56	58	18		42													
	25		90~1000	4 5 6 8 10 12 16			42	71	65	26.5	3	52	5.5	11	8	1003	1593	21.99	43.01	10.35	68.59	458	3.8		
	30	0-0.025	100~1250	4 5 6 8 10 12 16 20			47	80	75	13	30	3	60	6.6	11	8	1160	1980	30.26	62.93	15.68	93.27	633	5.49	

■ 容许静力矩MA1为使用1个螺帽时的数值;MA2为使用2个紧密接触的螺帽时的数值。



请按图示订货

■ HLF21-D6-L60-M3

型号		L		M	
代码	D				
HLF21	6	60~700		3	



交期Delivery

7天

发货

○ 本产品发货时间不含周日

滚珠丝杆
花键/支座组件
21