




实心滚珠花键 ◀ 圆筒螺母型/一端台阶外螺纹型




代码	类型	D公差	材质				硬度
			花键轴		花键母		
			国标	相当于	国标	相当于	
HLF41	圆筒螺帽型	h7	55	S55C	GCr15	SUJ2	高频淬火58~62HRC
HLT46	圆法兰螺帽型	h7	55	S55C	GCr15	SUJ2	高频淬火58~62HRC

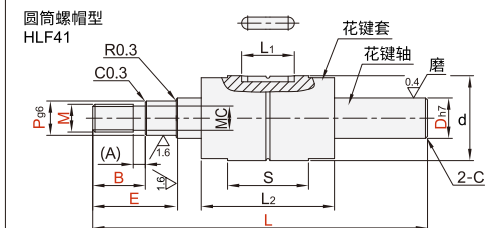


外螺纹退刀槽尺寸表			
粗牙螺纹退刀槽尺寸			
M	螺距	MC	(A)
3	0.5	2.4	1.5
4	0.7	3.2	
5	0.8	4.1	
6	1.0	4.4	2
8	1.25	6.0	
10	1.5	7.7	3
12	1.75	9.4	
16	2.0	13.0	4
20	2.5	16.4	
24	3.0	19.6	5

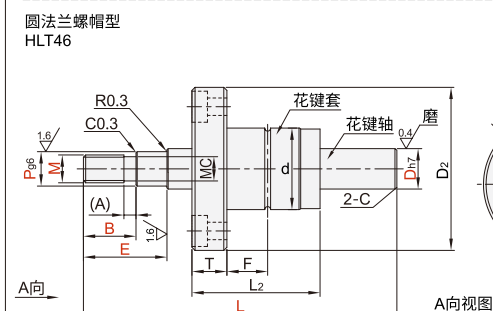


D=6/10/13
(2列滚珠)



D=8/16/20
(2列滚珠)



D=25/30
(4列滚珠)



■圆筒螺母型

型号	花键轴										花键母					基本额定 负载(kgf)	基本额定 扭矩(kgfm)	容许静力矩 (kgfm)		重量				
代码	Dh7	L 最小单位1	M	E	B	P	滚珠 列数	C 倒角	d	L ₁	L ₂	S	O 油孔	键槽 尺寸		C	Co	Cr	Cor	Ma ₁	Ma ₂	花键		
				最小单位1					b	t	kgf	kgfm		g	mm									
HLF41	6	0-0.015	60~500	3 4 5	根据 使用 要求 指定	M<P <D	2	0.5	14	10.5	25	16.7	1	2.5	1.2	137	225	0.46	0.76	0.39	3.48	14	0.22	
	8		6	16					10.5	27	15.7	1	0.6											
	10	0-0.018	60~700	6 8					21	13	33	20	1.5	3	1.5	285	396	540	2.89	3.94	1.5	12.46	52	1.03
	13		6 8 10	24					15	36	23	1.62												
	16	0-0.021	70~700	6 8 10 12					31	17.5	50	34	2	3.5	2	545	849	4.77	7.43	3.71	26.09	130	1.56	
	20		80~800	6 8 10 12 16					35	29	56	39.7												12.09
	25	0-0.025	90~1000	8 10 12 16 20					42	36	71	50.3	3	4	2.5	1003	1593	21.99	43.01	10.35	68.59	285	3.8	
	30		100~1250	8 10 12 16 20 24					47	42	80	60												30.26

■容许静力矩MA1为使用1个螺帽时的数值；MA2为使用2个紧密接触的螺帽时的数值。

■圆法兰螺母型

型号	花键轴								花键母								基本额定 负载(kgf)		基本额定 扭矩(kgfm)		容许静力矩 (kgfm)		重量				
代码	Dh7	L 最小单位1	M	E	B	P	滚珠 列数	C 倒角	d	L ₂	D ₂	T	F	O 油孔	P.C. D	安装孔			C	Co	Cr	Cor	MA ₁	MA ₂	母 g	轴 kg/m	
																X	Y	Z									kgf
HLT46	6	60~500	3 4 5	E=10 ~Px5	根据使用 要求指定	M<P <D	2	0.5	14	25	30	6	7.5	1.5	22	3.4	6.5	4.5	137	225	0.46	0.76	0.39	3.48	36.7	0.22	
	8		16						27	32	8	10.5	0.6						0.99	0.39	3.82	47	0.39				
	10		21						33	42	9	11	1.62						2.25	0.95	8.53	100	1.03				
	13	60~700	6 8 10						24	36	44	10	18	2	32	4.5	8	4.5	396	540	2.89	3.94	1.5	12.46	117	0.6	
	16		31						50	51	10	18	2					40	6	545	849	4.77	7.43	3.71	26.09	226	1.56
	20		35						56	58	13	26.5	3					42	5.5	9.5	5.4	724	1109	7.9	12.09	5.53	38
	25	80~800	6 8 10 12 16						42	71	65	13	26.5	3	52	5.5	9.5	5.4	1003	1593	21.99	43.01	10.35	68.59	458	3.8	
	30		47						80	75	13	30	60														6.6
		90~1000	8 10 12 16 20																								
		100~1250	810 12 16 20 24																								

■容许静力矩MA1为使用1个螺帽时的数值；MA2为使用2个紧密接触的螺帽时的数值。



请按图示订货

■HLF41-D6-L60-M3-E10-B7-P4

型号	L	M	E	B	P
代码	D				
HLF41	6	60~500	3 4 5	E=10~Px5	M<P<p



交期Delivery

5天 发货

○本产品发货时间不含周日