



平皮带用滑轮 ◀ 带肋槽直柱型 L=40~100

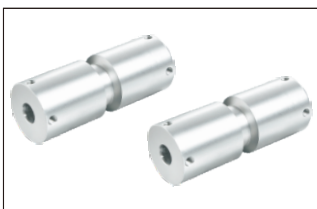


代码	类型	材质		表面处理
		国标	相当	
VBE11	带肋槽直柱型 无法兰型	LF2	A5052	本色阳极氧化

■圆孔+螺孔型

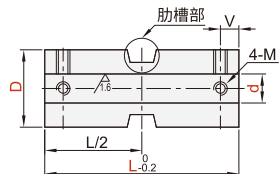


6.3


■肋槽部



■键槽孔+螺孔型

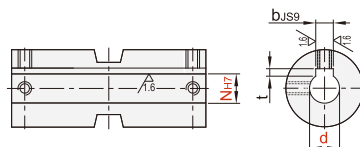

■平皮带导条形状与滑轮肋槽避让尺寸参考图

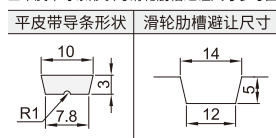

■键槽尺寸表

	NH7	bJS9	t公差	
8		3	±0.0125	1.4
10	$+0.015$			
K10		4	±0.0150	1.8
12	$+0.018$			$+0.1$
15	0	5		2.3
20		6		2.8
25	$+0.021$			
30	0	8	±0.0180	3.3
				$+0.2$

■圆孔+螺孔型

型号	dH7	最小单位1	X	Y	Z	M	V
代码	D	L					
VBE11	8	40~100	10.0~16.0	5.0~15.0	6.0~8.0	M4	4
	30						
	10						
	12						
	35						
	10						
	12						
	15						
	40					M5	4.5
	15						
	20						
	25						
	20						
	60					M6	5
	25						
	30						
	80					M8	6.5
	25						
	30						
	35						

■键槽孔+螺孔型

型号	NH7	最小单位1	X	Y	Z	M	V
代码	D	L					
VBE11	8	D≤50时40~100 D=60/80时60~100	10.0~16.0	5.0~15.0	6.0~8.0	M3	4
	30						
	10						
	12						
	35					M4	4.5
	10						
	12						
	15						
	40					M5	5
	15						
	20						
	25					M6	6.5
	50						
	20						
	25						
	60						
	80						
	25						
	30						



请按图示订货

■VBE11-D30-d8-L80-X10-Y6-Z5

型号	d	最小单位1	X	Y	Z
代码	D	L			
VBE11	30	8	40~100	10.0~16.0	5.0~15.0



交期Delivery

6天

发货

○本产品发货时间不含周日