



平皮带用惰轮 ◀ 直柱型 L=100-500



代码	类型	材质		表面处理
		国标	相当	
VBL01	直柱型	LF2	A5052	本色阳极氧化
VBL11		Q275	Q275	无电解镀锌
VBL21		0Cr18Ni9	SUS304	
VBL26		蓝色POM	蓝色POM	/

■ 轴承精度：GB/T 307.1 0级
相当于：JIS B 1514 0级

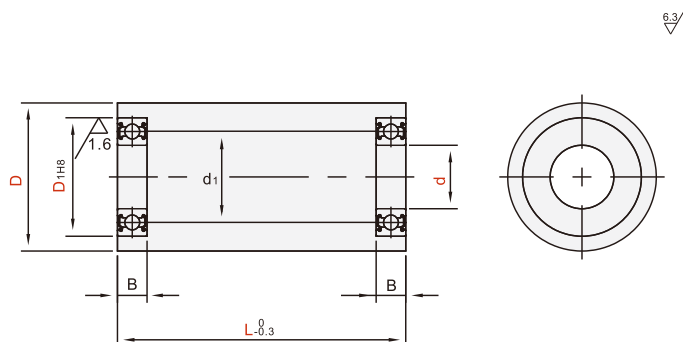

型号		d	最小单位10 L	d1			轴承尺寸		
代码	D			A5052/蓝色POM	钢(Q275)	不锈钢(SUS304)	型号	D1	B
VBL01 VBL11 VBL21 VBL26	30	8	100~500	15	—	—	698ZZ	19	6
		8A		—	—	—	608ZZ	—	7
		10		15	15.8	18	6900ZZ	22	6
		12		—	—	—	6901ZZ	24	—
	35	10		17	18.1	20	6900ZZ	22	6
		12		—	—	—	6901ZZ	24	—
		15		22	—	—	6902ZZ	28	7
	40	8		17	18.7	20	628ZZ	24	8
		10		—	—	—	6000ZZ	26	—
		12		—	—	—	6901ZZ	24	6
		15		—	—	—	6902ZZ	28	—
		20		22	22.7	—	6804ZZ	32	7
	50	10		17	24	22	6200ZZ	30	9
		12		22	—	—	6001ZZ	28	8
		15		17	—	—	6902ZZ	28	7
		20		22	—	—	6804ZZ	32	7
		25		27	30	28	6905ZZ	42	9
	60	12		22	22	20	6201ZZ	32	10
		15		—	—	—	6002ZZ	—	—
		20		32	30	30	6904ZZ	37	9
		25		37	35	35	6905ZZ	42	—
		30		44	42	42	6906ZZ	47	—
	80	25		37	35	35	6205ZZ	52	15
		30		44	42	42	6006ZZ	—	13
		35		44	42	42	6907ZZ	55	10



请按图示订货

■ VBL01-D30-d8-L100

型号		d	最小单位10 L
代码	D		
VBL01	30	8	100-500



交期Delivery

6天

发货

○ 本产品发货时间不含周日

