


圆皮带用滑轮 ◀ 双联型



代码	类型	材质		表面处理
		国标	相当	
VBS51	双联型	LF2	A5052	本色阳极氧化
VBS61		oCr18Ni9	SUS304	—

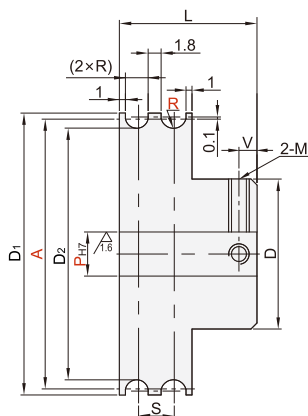

型号		R	轴孔规格内径 P(H7最小单位1)	S	D	D1	D2	L	V	2-M (粗牙螺纹)	附件	适用	
代码	A											紧定螺钉	圆皮带直径
VBS51 VBS61	15	1.1	3-8	4	12	17	13	14	3	M3	M3x3	2	
	20		4-10		17	22	18						
	30		4-12		21	32	28						
	20	1.6	3-10	5	17	22	17	16	3	M3	M3x3	3	
	30		5-12		21	32	27						
	40		5-20		31	42	37						
	45	2.1	5-12	6	21	25	19	18	4	M4	M4x3	4	
	23					30	24						
	28					32	26						
	40					42	36						
	45	2.6	5-18	7	26	47	41	20	4	M3	M3x3	5	
	48		5-20		31	50	44						
	28		5-12		21	30	23						
	40	3.1	5-20	8	31	42	35	22	3	M3	M3x3	6	
	50				52	45							
	28		4.1		5-20	10	31						30
	38	40		32									
	48	50		42									
	50	52		44									
	60	5.1	5-20	12	35	62	54	30	5	M5	M5x3	10	
	75					77	69						
	100					102	94						
	50	5.1	5-20	12	35	52	42	34	5	M5	M5x4	10	
	60					62	52						
	100					102	92						
	60	5.1	5-20	12	35	62	50	34	5	M5	M5x4	10	
	100					102	90						
	140					142	130						



请按图示订货

■ VBS51-A15-R1.1-P4

型号	R	Ph7选择
代码	A	
VBS51	15	1.1
		3-8



交期Delivery

6天

发货

○本产品发货时间不含周日