


圆皮带用惰轮 ◀ 双联型



■轴承采用压入式。

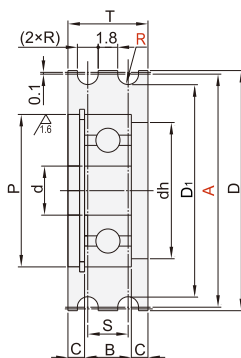

代码	类型	材质		表面处理	附件
		国标	相当		
VBW01	双联型	LF2	A5052	本色阳极氧化	挡圈(SUS304)
VBW11		oCr18Ni9	SUS304	—	

■轴承精度：GB/T 307.1 0级
相当于：JIS B 1514 0级

型号		R	S	d	P	dh	D	D1	T	B	C	使用轴承	适用圆皮带直径		
代码	A														
VBW01 VBW11	15	1.1	4	3	10	8	17	13	9	4	2.5	BAF623ZZ	2		
	20			4	13	11	22	18	10	5		BAF624ZZ			
	30			6	19	16	32	28	11	6		BAF626ZZ			
	20	1.6	5	4	13	11	22	17	11	5	3	BAF624ZZ	3		
	30			6	19	16	32	27		6	2.5	BAF626ZZ			
	40			10	26	23	42	37	14	8	3	BAY6000ZZ			
	45		47	42											
	23	2.1	6	6	15	13	25	19	13	5	4	BAF696ZZ	4		
	28					19	16			30	24	6		3.5	BAF626ZZ
	30							32		26					
	40			10	26	23	42	36	14	8	3	BAY6000ZZ			
	45						47	41							
	48						50	44							
	28	2.6	7	8	19	16	30	23	15	6	4.5	BAF698ZZ	5		
	40			10	26	23	42	35	16	8	4	BAY6000ZZ			
	50			12	32	27	52	45		10	5.5	BAY6201ZZ			
	28	3.1	8	6	19	16	30	22	17	6	5	BAF626ZZ	6		
	38			10	26	23	40	32	18	8	4	BAY6000ZZ			
	48							50						42	
	50						12	32						27	52
	60			62	54										
	75			77	69										
	100			102	94										
	50	4.1	10	12	32	27	52	42	21	10	5	BAY6201ZZ	8		
	60				62	52	11	BAY6202ZZ							
	100			15	35	30				102		92			
	60	5.1	12	15	35	30	62	50	25	11	7	BAY6202ZZ	10		
	100							102						90	
140							142	130							



请按图示订货

■ VBW01-A20-R1.1-S4

型号		R	S
代码	A		
VBW01	20	1.1	4



交期Delivery

6天

发货

○本产品发货时间不含周日