


防松动型螺母 ◀ 弹片锁紧型 U型 标准型



· 螺纹精度:ISO6H
· 端面摆:0.005


GYAQ01/02



代码	类型		材质	
			国标	相当
GYAQ01	U型	标准型	0Cr18Ni9	SUS304
GYAQ02			45	S45C
GYAQ03			45	S45C
GYAQ04			Q235	SS400

GYAQ03/04

· 螺纹精度:JIS6H
· 端面摆:0.05

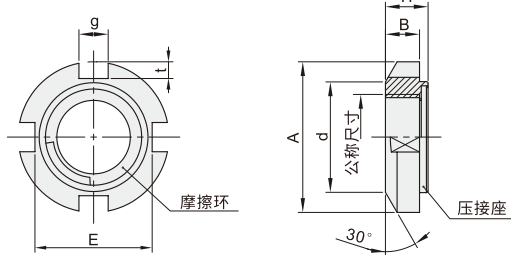

垫圈
螺母
吊环母
30

型号		螺距	A		d		h	H		g		t
代码	公称尺寸											
GYAQ01 GYAQ02	M10	0.75	18	0 -0.5	13	4	5.2	±0.3	3	+0.1 0	2	
	M12		22		17		5.4					
	M15		25		21	5	6.5	±0.5				
	M17	28	24		6.4							
	M20	1.0	32		26	6	7.7	±0.8	4			
	M25		38		32	7	9.1					
	M30		45		38		8	10.2	±0.8	5		
	M35		52		44	9	11.2	±1.0			6	
	M40		58		50	10	12.5		±1.5	7		
	M45		65		56	11	13.5	±1.5			8	
	M50	70	61		1	15	±1.5		8			
	M55	1.5	75		67	13		15.8		±1.5	10	
	M60		80		73	15	18.6	±1.5	10			
	M65		85		79	16	19.2			±1.5	10	
	M70		92		85	17	21.3	±1.5	10			
	M75		2.0		98	90	18			22.3	±1.5	10
	M80				105	95	17	21.3	±1.5	10		
	M85	110			102	18	22.3	±1.5			10	
	M90	120			108	17	21.3		±1.5	10		
	M95	125			113	18	22.3	±1.5			10	
	M100	130			120	18	22.3		±1.5	10		

型号		螺距	d	A		H		B	g	t	E		重量 (g)		
代码	公称尺寸														
GYAQ03 GYAQ04	M8*	0.75	12	0 -0.5	16	5.3	±0.3	4.3	3	±0.2	1.5	13	0 -0.5	4.1	
	M10		13.5		18	5.2		4			1.4	14.4		4.5	
	M12		17		22	5.4					1.8	18.4		8	
	M15	1.0	21		25	6.5	±0.5	5	4		2.1	21.4		12	
	M17		24		28	6.4					1.9	24.2		13	
	M20		26		32	7.7		6			1.8	28.4		23	
	M25	1.5	32		38	9.1	±0.8	7	5		2	34		36	
	M30		38		45						2	41		45	
	M35		44		52	10.2					2	48		70	
	M40		50		58	11.2	9				2.5	53		95	
	M45		56		65	12.5					±1.0	6		60	130
	M50		61		70	13.5						11		65	160

带*尺寸不适用BKJ03



请按图示订货

GYAQ01-M10-0.75

型号		螺距
代码	公称尺寸	
GYAQ01	M10	0.75



交期Delivery

3天

发货

○本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！

P1042