


防松动型螺母 ◀ 牙腹锁紧型 圆形(三槽 六槽)

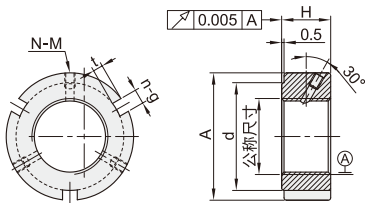

- 特点:
- 该产品锁紧铜与螺纹呈30°角设计, 不承受作用于螺纹上的轴向负荷。
 - 当螺母锁紧时, 螺纹面不会解除轴向负荷, 螺母不会变形。
 - 等间距锁紧铜可以用来调整即将装到轴上其他部件的偏差。
 - 由于锁紧铜不会变形, 螺母经多次拆装仍可以保持精密度。
 - 本产品自带螺钉。
 - 螺纹精度: ISO4H
 - 端面偏摆: 0.005

型号	螺距	A	H	d	t	n-g	N-M	扭紧力矩 (N-M)
代码	公称尺寸							
M12	1.5	30	14	25		3-4		
M14	1.0							
M15	1.0							
M16	1.5							
M17	1.0	32		27				
M18	1.5							
M20	1.0		16		2		3-M6	8
M22		38		33		3-5		
M24								
M25								
M27		40		35				
M30		45	18	40				
M33		50		45				
M35	1.5	52		46				
M36								
M39		58		52				
M40								
M42		62	20	56	2.5	3-6		
M45		65		59				
M48		70		64				
M50								
M52		73		66				
M55	2.0							
M56	1.5	75		68			3-M8	18
M60	2.0	80	22	73	3			
M64	1.5	85		78		3-8		
M65								
M68								
M70	2.0	92		84				
M72		94	24	86	3.5			
M75								
M76		98		90				

型号	螺距	A	H	d	t	n-g	N-M	扭紧力矩 (N-M)
代码	公称尺寸							
M80		105	24	98	3.5	3-8		
M85		110		102		6-8		
M90		120		108			3-M8	18
M95		125	26	117				
M100		130		118				
M105		140		125	4	6-10		
M110		145	28	132				
M115	2.0	150		137				
M120		155		142				
M125		160	30	147				
M130		165		152				
M135		175		160	5	6-12	3-M10	35
M140		180	32	165				
M145		190		175				
M150		195		180				
M155		200						
M160		210	34	190	6	6-14		
M165								
M170	3.0	220		200				
M180		230	36	205				
M190		240		215				
M200		250		225	7			
M210	4.0	260	38	245		6-16	3-M12	60
M220	3.0	270		255				
	4.0							
M240	3.0	290		268	9			
M260		310	40	288				
M260								
M270	4.0	320		298	10	6-20	3-M14	100
M280		330		308				
M300		350	42	325	11	6-22		



请按图示订货

■ GYAQ73-M12-1.5

型号	螺距
代码	公称尺寸
GYAQ73	M12
	1.5



交期Delivery

3天

发货

○ 本产品发货时间不含周日

垫圈
吊环母

30



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!

P1046