


标准型弹簧垫圈



代码	类型	材质	表面处理	适用标准
YWT01	标准型弹簧垫圈	SWRH57	镀锌	DIN 127-1987
YWT02		SUS304	/	
YWT13		65Mn (弹簧钢)	镀锌	GB/T 93-1987
YWT14			发黑	
YWT15		SUS304	/	
YWT16		SUS316	/	

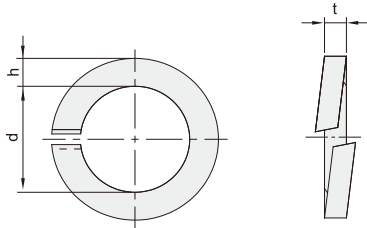

■DIN127-1987

型号		d		h		t	
代码	公称直径	max	min	max	min	max	min
YWT01 YWT02	2	2.4	2.1	1.0	0.8	0.6	0.4
	2.5	2.9	2.6	1.1	0.9	0.7	0.5
	3	3.4	3.1	1.4	1.2	0.9	0.7
	4	4.4	4.1	1.6	1.4	1.0	0.8
	5	5.4	5.1	1.9	1.7	1.3	1.1
	6	6.5	6.1	2.65	2.35	1.7	1.5
	8	8.5	8.1	3.15	2.85	2.1	1.9
	10	10.7	10.2	3.7	3.3	2.35	2.05
	12	12.7	12.2	4.2	3.8	2.65	2.35
	16	17	16.2	5.2	4.8	3.7	3.3
	20	21.2	20.2	6.2	5.8	4.2	3.8
	24	25.5	24.5	7.25	6.75	5.2	4.8
	30	31.7	30.5	8.25	7.75	6.2	5.8

■GB/T93-1987

型号		d		h		t	
代码	公称直径	max	min	max	min	max	min
SUS304 YWT15	1.6	1.8	1.6	0.8	0.5	0.8	0.5
	2	2.35	2.1	0.58	0.42	0.58	0.42
	2.5	2.85	2.6	0.73	0.57	0.73	0.57
	3	3.4	3.1	0.9	0.7	0.9	0.7
	4	4.4	4.1	1.2	1.0	1.2	1.0
	5	5.4	5.1	1.4	1.2	1.4	1.2
	6	6.68	6.1	1.7	1.5	1.7	1.5
	8	8.68	8.1	2.2	2.0	2.2	2.0
	10	10.9	10.2	2.75	2.45	2.75	2.45
	12	12.9	12.2	3.25	2.95	3.25	2.95
	14	14.9	14.2	3.8	3.4	3.8	3.4
	16	16.9	16.2	4.3	3.9	4.3	3.9
SUS316 YWT16	18	19.04	18.2	4.7	4.3	4.7	4.3
	20	21.04	20.2	5.2	4.8	5.2	4.8
	22	23.34	22.5	5.7	5.3	5.7	5.3
	24	25.5	24.5	6.2	5.8	6.2	5.8
	27	28.5	27.5	7.1	6.5	7.1	6.5
	30	31.5	30.5	7.8	7.2	7.8	7.2
	33	34.7	33.5	8.8	8.2	8.8	8.2
	36	37.7	36.5	9.3	8.7	9.3	8.7

■GB/T93-1987

型号		d		h		t	
代码	公称直径	max	min	max	min	max	min
弹簧钢 YWT13 YWT14	3	3.4	3.1	0.9	0.7	0.9	0.7
	4	4.4	4.1	1.2	1.0	1.2	1.0
	5	5.4	5.1	1.4	1.2	1.4	1.2
	6	6.68	6.1	1.7	1.5	1.7	1.5
	8	8.68	8.1	2.2	2.0	2.2	2.0
	10	10.9	10.2	2.75	2.45	2.75	2.45
	12	12.9	12.2	3.25	2.95	3.25	2.95
	14	14.9	14.2	3.8	3.4	3.8	3.4
	16	16.9	16.2	4.3	3.9	4.3	3.9
	18	19.04	18.2	4.7	4.3	4.7	4.3
	20	21.04	20.2	5.2	4.8	5.2	4.8
	22	23.34	22.5	5.7	5.3	5.7	5.3
	24	25.5	24.5	6.2	5.8	6.2	5.8
	27	28.5	27.5	7.1	6.5	7.1	6.5
	30	31.5	30.5	7.8	7.2	7.8	7.2



请按图示订货

■YWT01-2

型号

代码

YWT01

公称直径

2



交期Delivery

3天

发货

○本产品发货时间不含周日

