


孔用挡圈 ◀ C型 弹簧钢/不锈钢 国标



代码	类型	材质	表面处理	适用标准
YCS41	C型孔用挡圈	65Mn (弹簧钢)	发黑	GB/T 893.1-1986
YCS42		SUS304	/	

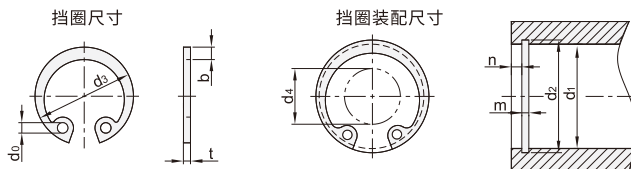

d_4 : 将挡圈嵌入 d_1 时的最小内周直径(间隙内径)。

垫圈
吊钩
螺母

30

型号		公称规格 d ₁	挡圈						安装沟槽尺寸				其它		
代码	规格		d ₃		t		b≈	d ₀	d ₂		m			n≥	d ₄ ≤
			基本尺寸	极限偏差	基本尺寸	极限偏差			基本尺寸	极限偏差	基本尺寸	极限偏差			
弹簧钢 YCS41 SUS304 YCS42	9*	9	9.8	+0.36 -0.10	0.6	+0.04 -0.07	1.2	1.0	9.4	+0.09 0	0.7	+0.11 0	0.9	0.6	2
	10	10	10.8		0.8	+0.04 -0.10	1.7	1.5	10.4	+0.13 0	1.1				3
	11	11	11.8						11.4						4
	12	12	13						12.5						5
	13	13	14.1						13.6						1.2
	14	14	15.1		14.6	7									
	15	15	16.2		15.7	8									
	16	16	17.3		16.8	1.0	+0.05 -0.13	2.1	1.7	17.8	+0.21 0				
	17	17	18.3	19.0	10										
	18	18	19.5	20.0	11										
	19	19	20.5	21.0	12										
	20	20	21.5	+0.42 -0.13	1.0	+0.05 -0.13	2.5	2.0	22.0	+0.25 0	1.7	+0.30 0	2.2	4.5	13
	21*	21	22.5						23.0						14
	22	22	23.5						25.2						15
	24	24	25.9						26.2						16
	25	25	26.9	+0.42 -0.21	1.2	2.8	3.2	2.5	27.2	+0.35 0	2.7	+0.35 0	5.3	17	
	26	26	27.9						29.4					18	
	28	28	30.1						31.4					19	
	30	30	32.1						32.7					20	
	31*	31	33.4	+0.50 -0.25	1.5	+0.06 -0.15	4.0	4.7	3.0	33.7	+0.30 0	2.7	+0.35 0	5.3	21
	32	32	34.4							35.7					22
	34*	34	36.5							37.0					23
	35	35	37.8							38.0					24
	36*	36	38.8	+0.9 -0.39	1.5	+0.06 -0.15	4.0	4.7	3.0	39.0	+0.30 0	2.7	+0.35 0	5.3	25
	37*	37	39.8							40.0					26
	38	38	40.8							42.5					27
	40	40	43.5							44.5					28
	42	42	45.5	+1.10 -0.46	2	+0.06 -0.18	5.2	5.7	3.0	47.5	+0.30 0	2.7	+0.35 0	5.3	29
	45	45	48.5							49.5					30
	47*	47	50.5							50.5					31
	48*	48	51.5							53.0					32
	50	50	54.2	+1.10 -0.46	2	+0.06 -0.18	5.2	5.7	3.0	55.0	+0.30 0	2.7	+0.35 0	5.3	36
52	52	56.2	58.0							37					
55*	55	59.2	59.0							38					
56*	56	60.2	61.0							39					
58*	58	62.2	+1.30 -0.54	2.5	+0.07 -0.22	6.3	7.3	7.7	63.0	+0.35 0	2.7	+0.35 0	5.3	40	
60	60	64.2							65.0					41	
62	62	66.2							68.0					42	
63*	63	67.2							71.0					43	
65*	65	69.2	+1.30 -0.54	2.5	+0.07 -0.22	6.3	7.3	7.7	73.0	+0.35 0	2.7	+0.35 0	5.3	44	
68*	68	72.5							75.0					45	
70	70	74.5							78.0					46	
72*	72	76.5							81.0					47	
75*	75	79.5	+1.30 -0.54	2.5	+0.07 -0.22	6.3	7.3	7.7	83.5	+0.35 0	2.7	+0.35 0	5.3	48	
78*	78	82.5							88.5					49	
80*	80	85.5							91.5					50	
85*	85	90.5							93.5					51	
88*	88	93.5	+1.30 -0.54	2.5	+0.07 -0.22	6.3	7.3	7.7	98.5	+0.35 0	2.7	+0.35 0	5.3	52	
90*	90	95.5							98.5					53	
95*	95	100.5							98.5					54	

带*尺寸不适用于YCS42

YCS41-9



请按图示订货

型号	
代码	规格
YCS41	9



交期Delivery

3天

发货

○本产品发货时间不含周日