


小径定位柱 ◀ 标准型




代码		销头开状	材质			使用 环境温度
			主体	销	弹簧	
YZS01	YZS11	平头型	SUS303	SUS304	SUS304	-30-140℃
YZS02	YZS12	球面型				
YZS03	/	锥头R型				


平头型 YZS01/YZS11

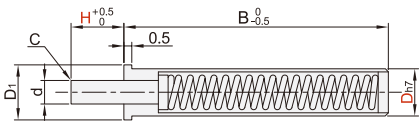

球面型 YZS02/ZS12

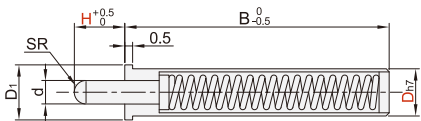

锥头R型 YZS03

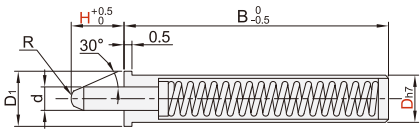

- 注：
- ① 建议安装孔尺寸DH7
 - ② 请在安装部位涂抹粘合剂后安装，避免脱落。

型号		H	d	D1	B	C	R	负载(N)			
代码	Dh7							轻载		重载	
								(YZS01/02/03)		(YZS11/12)	
								min.	max.	min.	max.
平头型 YZS01 YZS11	2	1.5	1	2.5	16	0.1	0.3	0.49	0.98	1.96	3.92
		3			26					1.67	3.73
	3	3	2	3.5	16	0.15	0.5		1.47	2.45	3.92
		6			26					2.26	3.73
球面型 YZS02 YZS12	4	3	3	4.5	15	0.2	1	0.59	2.06	3.43	5.3
		6			20			0.49		2.45	5.3
		9			32			0.69		3.92	2.94
	锥头R型 YZS03	5	4	4	5.5	17	0.3	1.5	0.64	1.96	3.73
8			24			0.78			3.82	3.04	7.06
12			32			0.83			5.79	2.75	



请按图示订货

■ YZS01-D2-H1.5

型号		H
代码	D	
YZS01	2	1.5



交期Delivery

3天

发货

○ 本产品发货时间不含周日

垫圈
吊环母

30



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！

P1098