


带止动垫片眼型旋转吊环 ◀ 80级旋转自锁钩



代码	类型	材质	表面处理
GYCC24	带止动垫片眼型旋转吊环	合金钢	烤漆

注:因烤漆工艺,可能导致产品吊装部分区域未能烤漆。

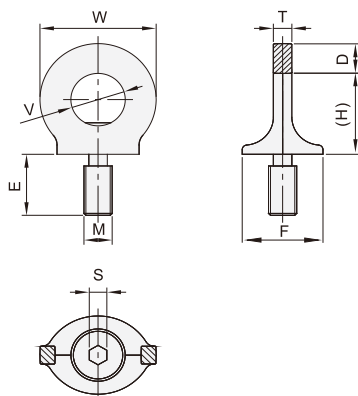

型号		M	H	V	T	D	E	F	S	W	净重 (kg)
代码	规格										
GYCC24	0.3T	8	36	25	8	9	12	25	6	44	0.1
	0.4T	10					15				
	0.75T	12	45	30	10	11	18	33	8	52	0.2
	1.5T	16	52	35	14	13	24	35	10	61	0.3
	2.3T	20	60	40	16	15	30	44	12	70	0.6
	3.2T	24	72	48	19	18	36	52	14	84	1.0

吊环安装方式												
吊环数量		1	2	1	2	2	2	2	3-4	3-4	3-4	
起吊角度		0°	0°	90°	90°	0-45°	45-60°	不对称	0-45°	45-60°	不对称	
型号		工作极限载荷（吨）										
代码	规格	M										
GYCC24	0.3T	8	1	2	0.3	0.6	0.42	0.3	0.3	0.63	0.45	0.3
	0.4T	10	1	2	0.4	0.8	0.56	0.4	0.4	0.8	0.6	0.4
	0.75T	12	2	4	0.75	1.5	1	0.75	0.75	1.5	1.1	0.75
	1.5T	16	4	8	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
	2.3T	20	6	12	2.3	4.6	3.2	2.3	2.3	4.8	3.4	2.3
	3.2T	24	8	16	3.2	6.4	4.5	3.2	3.2	6.7	4.8	3.2



请按图示订货

■ GYCC24-0.3T

型号

代码

规格

GYCC24

0.3T



交期Delivery

5天

发货

○本产品发货时间不含周日

垫圈
螺母
吊钩

30