



氮气弹簧 ◀ 头部安装限定型/反作用力固定型



代码	类型	材质		表面处理		使用温度
		气缸	活塞杆	气缸	活塞杆	
AGTX	头部安装限定型	STKM11A	S20C	烤漆	镀硬铬	-20°C ~60°C

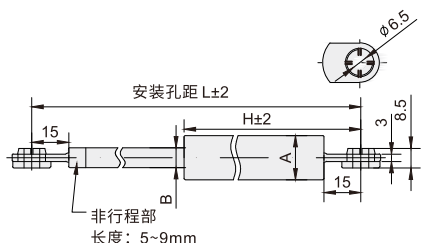

NO. 15050A~18100A

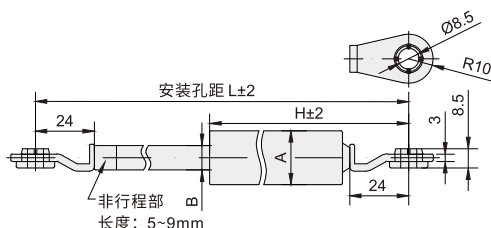

NO. 22080A~22300B

型号		最大长度 Lmax	最小长度 Lmin	行程	氮气反作用力（20℃）					A	B	C1	C2	D	G	H	适用安装 支架	重量 (g)			
					最大长度 -10mm行程时		最大长度 -（S）mm行程时														
代码	规格				N	kgf	N	kgf	（s）												
AGTX	15050A	181	131	50	27	2.8	32	3.4	40	15	6	15	15	6.5	R8	110	ADJ52-6A	75			
	15050B				85	8.7	102	10.4													
	15050C				147	15	175	17.9													
	15070A	221	151	70	81	8.3	102	10.4	60							131	90				
	15070B				119	12.1	124	12.7	41.5												
	15090A				69	7	89	9.1													
	15090B	261	171	90	79	8.1	103	10.5	80							150	ADJ52-6A	108			
	15090C				88	9	115	11.7													
	15090D				147	15	191	19.5													
	15100A	281	181	100	76	7.8	103	10.5	90							161	120				
	15100B				196	20	257	26.2													
	18090A				261	171	90	263	26.8	343	35	80	151	170							
	18100A	281	181	100	324	33.1	428	43.7	90	161	190										
	22080A	279	199	80	196	20	237	24.2	70	22	10	24	24	8.5	R10	169.5	178				
	22096A	306	210	96	392	40	494	50.4	86							186	195				
	22142A	472	330	142	279	28.5	372	38	125							306	300				
	22147A	412	265	147	147	15	194	19.8	130							241	265				
	22235A	580	344.5	235.5	129	13.2	195	19.9	206							320.5	370				
	22235B				248	25.3	314	32	208							376	470				
	22243A	627	384	243	196	20	301	30.7	215		12.5					360	500				
	22243B				433	44.2	657	67													
	22270A	670	400	270	343	35	497	50.7	240							376	500				
	22270B				507	51.7	739	75.4													
	22300A	700	400	300	745	76	1160	118.4	275		20	20				376	525				
	22300B				850	86.7	1320	134.7													



请按图示订货

AGTX-15050A

型号

代码

AGTX

规格

15050A
15050B



交期Delivery

3天

发货

○ 本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台