


内六角薄圆柱头/平圆头螺钉

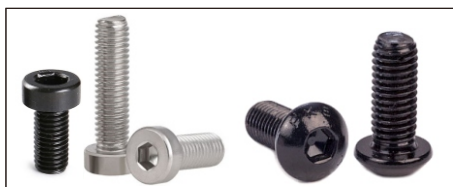

■薄圆柱头型

代码	类型	材质	表面处理	强度等级	硬度	抗拉强度 (N/mm2)	0.2%屈服强度 (N/mm2)
YWV01	薄圆柱	ML40Cr	发黑	12.9	/	1040	900
YWV02	头型	SUS304	/	A2-70	/	800	640


特点：可以直接使用在以往会被六角螺栓头阻碍到的地方。

本产品适用标准：DIN9784-2002


■内六角平圆头螺钉

代码	类型	材质	表面处理	硬度	强度等级	适用标准
YWG01	内六角	10B21	发黑	37~42HRC	10.9	ISO 7380-1-2011
YWG02	平圆头螺钉	SUS304	/	/	A2-70	JIS B 1174-2006 GB/T 70.2-2008

薄圆柱头型 YWV01/02

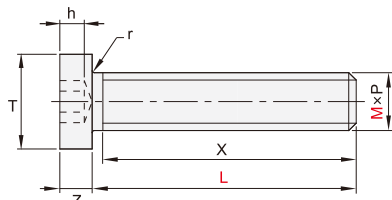

内六角平圆头螺钉 YWG01/02

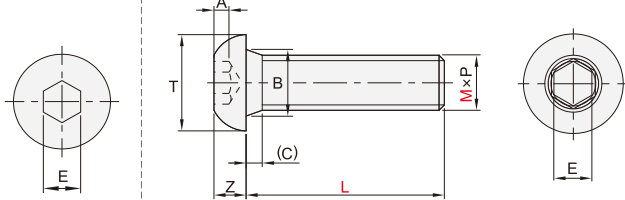

■薄圆柱头型

型号		L										X	P螺距	T	Z	E	h	r(min)
代码	M																	
YWV01	3	4	5	6	8	10	12	14	16	20	全牙	0.5	5.5	2	2	1.5	0.1	
	4	6	8	10	12	16	20					0.7	7	2.8	2.5	2.3	0.2	
	5	8	10	12	16	20	25					0.8	8.5	3.5	3	2.7	0.2	
	6	8	10	12	16	20	25	30	35	40		1	10	4	4	3	0.25	
	8	10	12	16	20	25	30	35	40	45		1.25	13	5	5	3.8	0.4	
	10	16	20	25	30	35	40	45	50	1.5		16	6	6	4.5	0.4		
	12	16	20	25	30	35	40	45	50	1.75		18	7	8	5	0.6		
	14	25	30	35	40	45	50					2	21	8	10	5.3	0.6	
	16	25	30	35	40	45	50	55	60	2		24	9	12	5.5	0.6		

型号												X	P螺距	T	Z	E	h	r(min)	
代码	M	L																	
YWV02	3	4	5	6	8	10	12	14	16	20	全牙	0.5	5.5	2	2	1.5	0.1		
	4	6	8	10	12	16	20	25	30	35		40	0.7	7	2.8	2.5	2.3	0.2	
	5	6	8	10	12	16	20	25	30	35		40	0.8	8.5	3.5	3	2.7	0.2	
	6	10	12	16	20	25	30	35	40	45		50	1	10	4	4	3	0.25	
	8	10	12	16	20	25	30	35	40	45		50	1.25	13	5	5	3.8	0.4	
	10	15	20	25	30	35	40	45											
	12	16	20	25	30	35													
	14	25	30	35	40	45	50												
		16	25	30	35	40	45	50	55	60									

■内六角平圆头螺钉

型号		L														P螺距	T	Z	E	A	B	C														
代码	M																																			
YWG01	3	6	8	10	12	14	16	18	20	25	30	35	40	45	50	0.5	5.7	1.65	2	1.04	3.6	1														
	4	6	8	10	12	16	20	25	30	35	40	45	50										0.7	7.6	2.2	2.5	1.3	4.7	1.4							
	5	6	8	10	12	14	16	20	25	30	35	40	45	50										0.8	9.5	2.75	3	1.56	5.7	1.6						
	6	8	10	12	14	16	20	25	30	35	40	45	50	55	60										1	10.5	3.3	4	2.08	6.8	2					
	8	10	12	16	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100										1.25	14	4.4	5	2.6	9.2	2.5
	10	16	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100										1.5	17.5	5.5	6	3.12	11.2	3			
	12	16	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100										1.75	21	6.6	8	4.16	14.2	3.5			
	16	30	35	40	45	50	55	60	65	70	75	80	90	100										2	28	8.8	10	5.2	18.2	4						

型号		L	P螺距	T	Z	E	A	B	C
代码	M								
YWG02	3	6 8 10 12 16 20 25	0.5	5.7	1.65	2	1.04	3.6	1
	4	6 8 10 12 16 20 25 30	0.7	7.6	2.2	2.5	1.3	4.7	1.4
	5	8 10 12 16 20 25 30	0.8	9.5	2.75	3	1.56	5.7	1.6
	6	10 12 16 20 25 30 35	1	10.5	3.3	4	2.08	6.8	2
	8	12 16 20 25 30 35 40 45 50	1.25	14	4.4	5	2.6	9.2	2.5
	10	16 18 20 22 25 30	1.5	17.5	5.5	6	3.12	11.2	3
	12	20 25 30 35	1.75	21	6.6	8	4.16	14.2	3.5



请按图示订货

■ YWV01-M4-L8

型号		L	
代码	M		
YWV01	4	6 8 10	



交期Delivery

3天

发货

○本产品发货时间不含周日