



# 内六角圆柱头螺钉 ◀ 超短头型/超薄头型



内六角超短头螺钉  
YWN01/02

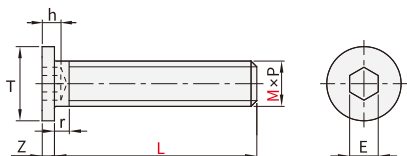

超薄头型  
YWN03

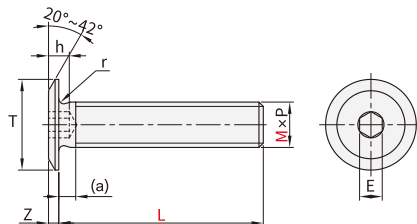

特点：可以直接使用在以往会被六角螺栓头阻碍到的地方。

## ■内六角超短头螺钉

| 型号    |     | L |    |    |    |    |    |    |    |    |    | P螺距  | T  | Z   | E   | h   | r   |
|-------|-----|---|----|----|----|----|----|----|----|----|----|------|----|-----|-----|-----|-----|
| 代码    | M   |   |    |    |    |    |    |    |    |    |    |      |    |     |     |     |     |
| YWN01 | 2   | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.4  | 4  | 1.1 | 1.3 | 1.2 | 1.2 |
|       | 2.5 | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.45 | 5  | 1.3 | 1.3 | 1.5 | 1.5 |
|       | 3   | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.5  | 6  | 1.3 | 1.5 | 2   | 1.6 |
|       | 4   | 4 | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 0.7  | 8  | 1.5 | 2   | 2.5 | 1.6 |
|       | 5   | 5 | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 0.8  | 9  | 1.5 | 3   | 3   | 1.6 |
|       | 6   | 6 | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 1    | 10 | 1.5 | 3   | 4   | 2.0 |
|       | 8   | 6 | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 1.25 | 13 | 1.5 | 4   | 5   | 2.5 |
|       | 10  | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 35 | 1.5  | 16 | 1.5 | 5   | 5   | 3   |

| 型号    |     | L |    |    |    |    |    |    |    |    |    | P螺距  | T  | Z   | E   | h   | r   |
|-------|-----|---|----|----|----|----|----|----|----|----|----|------|----|-----|-----|-----|-----|
| 代码    | M   |   |    |    |    |    |    |    |    |    |    |      |    |     |     |     |     |
| YWN02 | 2   | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.4  | 4  | 1.5 | 1.3 | 1.2 | 1.2 |
|       | 2.5 | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.45 | 5  | 1.5 | 1.3 | 1.5 | 1.5 |
|       | 3   | 3 | 4  | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 0.5  | 6  | 1.5 | 1.5 | 2   | 1.6 |
|       | 4   | 4 | 5  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 0.7  | 8  | 1.5 | 2   | 2.5 | 1.6 |
|       | 5   | 5 | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 0.8  | 9  | 1.5 | 3   | 3   | 1.6 |
|       | 6   | 6 | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 1    | 10 | 1.5 | 3   | 4   | 2.0 |
|       | 8   | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 35 | 1.25 | 13 | 1.5 | 4   | 5   | 2.5 |
|       | 10  | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 35 | 1.5  | 15 | 1.5 | 5   | 5   | 3   |

## ■超薄头型

| 型号    |     | L |    |    |    |    |    |    |    |  |  | P螺距  | T  | Z   | E    | h   | (a) | r(min) |
|-------|-----|---|----|----|----|----|----|----|----|--|--|------|----|-----|------|-----|-----|--------|
| 代码    | M   |   |    |    |    |    |    |    |    |  |  |      |    |     |      |     |     |        |
| YWN03 | 2   | 3 | 4  | 5  | 6  | 8  | 10 |    |    |  |  | 0.4  | 4  | 0.5 | 1.27 | 1.2 | 1.2 | 0.1    |
|       | 2.5 | 3 | 4  | 5  | 6  |    |    |    |    |  |  | 0.45 | 5  | 0.6 | 1.27 | 1.5 |     |        |
|       | 3   | 5 | 6  | 8  | 10 | 12 | 16 |    |    |  |  | 0.5  | 6  | 0.8 | 1.5  | 2   |     |        |
|       | 4   | 5 | 6  | 8  | 10 | 12 | 16 | 20 | 25 |  |  | 0.7  | 8  | 0.9 | 2    | 2.5 | 1.2 | 0.2    |
|       | 5   | 6 | 8  | 10 | 12 | 16 | 20 | 25 |    |  |  | 0.8  | 9  | 1   | 2.5  | 3   | 1.8 |        |
|       | 6   | 8 | 10 | 12 | 16 | 20 | 25 |    |    |  |  | 1    | 10 | 1.2 | 3    | 4   | 2.2 |        |



请按图示订货

## ■ YWN03-M4-L8

| 型号    |   | L |   |   |    |    |    |    |    |  |  |
|-------|---|---|---|---|----|----|----|----|----|--|--|
| 代码    | M |   |   |   |    |    |    |    |    |  |  |
| YWN03 | 4 | 5 | 6 | 8 | 10 | 12 | 16 | 20 | 25 |  |  |



交期Delivery

3天

发货

○本产品发货时间不含周日

垫圈 / 吊环  
螺母 / 螺钉

34



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！

P1342