


定位珠 ◀ 无防松型




代码	类型	载荷	主体			球头		弹簧	使用环境温度
			材质	硬度	表面处理	材质	硬度		
YZC01	无防松型	轻载	SCM435	29~36HRC	镀蓝白锌	SUJ2	56HRC-	SWP-B	-30~80°C
YZC02		重载							
YZC03		超重载							
YZC31		超轻载	SCM435	29-35HRC	发黑				
YZC32		轻载			/				
YZC33		重载	SUS304	/	/				
YZC34		超重载	SCM435	29-35HRC	镀镍				

无防松型
YZC01/02/03

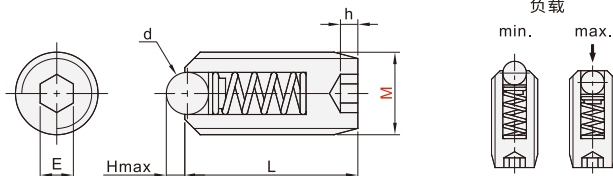

无防松型
YZC31/32/33/34

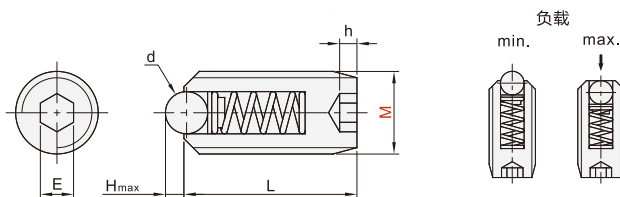

型号		d	H	L	h	E	负载(N)					
代码	M						轻载		重载		超重载	
							min.	max.	min.	max.	min.	max.
YZC01 YZC02 YZC03	3	1.5	0.5	7	1	1.5	1	2	1.5	2.9	2.2	5
	4	2.5	0.8	9	2.4	2	2	4.9	3.9	9.8	2.5	12.5
	5			12	2	2.5	2.7	9.6	4.7	19.8	11	23.9
	6	3	1.2	13	2.5	3	4.9	14.9	9.8	29.6	17.7	33.4
	8	5	2	15		4	7	19.8	12.9	39.4	21.6	45.5
	10	6	2.5	16	3	5	9	24.6	18.8	49.2	23.7	58.9
	12	8	3	20		6	10	29.5	19.8	59.0	24.3	62.5
	16	10	4	25		8	15.9	49.1	29.6	98.2	43.8	116.2
	20	12	5	40	6	10	54	98.1	78.6	147.8	84.8	196.8

型号		d	H	L	h	E	负载(N)							
代码	M						超轻载		轻载		重载		超重载	
							min.	max.	min.	max.	min.	max.	min.	max.
YZC31	5	3	0.8	12	2	2.5	0.9	3.22	2.8	9.9	4.8	19.7	11.1	24.2
	6	3.5	1.2	13	2.5	3	1.5	4.95	4.8	14.8	9.7	29.5	17.6	33.5
YZC32	8	5	2	15		4	2.3	6.46	6.8	19.7	12.6	39.3	21.3	45.4
YZC33	10	6	2.5	16	3	5	2.9	8.2	8.7	24.6	18.5	49.1	23.4	58.8
YZC34	12	8	3	20		6	3.4	9.78	9.7	29.5	19.5	58.9	24	62.4
	16	10	4	25		8	5.6	15.9	15.6	49.1	29.3	98.1	43.5	116



请按图示订货

YZC01-M3

型号

代码

M

YZC01

3



交期Delivery

3天

发货

○ 本产品发货时间不含周日

垫圈 / 吊环
螺母 / 螺母

34



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！

P1404