



链轮/链条 ◀ 60B系列(12A)

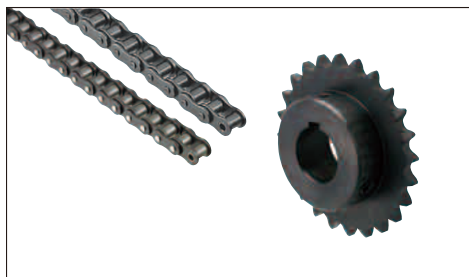

■ 链条	代码	类型	节距	材质
	KHT60	60系列	19.05	钢
	KHTS60			不锈钢
	KHTR60			钢(含油衬套)
	KHTQ60			钢(高强度)

■ 链轮	代码	类型	材质	热处理	表面处理	附件
	KQV60B	60系列	S45C	齿顶高频	发黑	固定螺丝
	KQVS60B		SUS304	\	\	

链轮

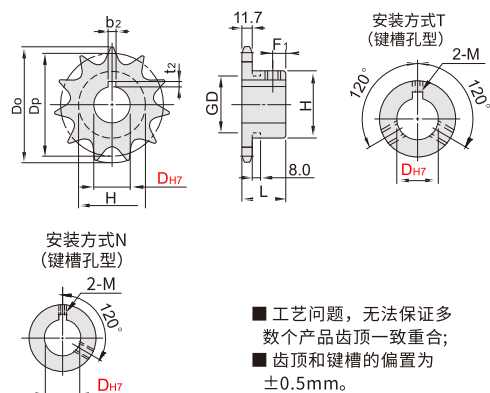


- 工艺问题, 无法保证多个产品齿顶一致重合;
- 齿顶和键槽的偏置为 $\pm 0.5\text{mm}$ 。

■ 链轮-轴孔加工尺寸表

轴孔直径 D	键槽 $b_2 \times t_2$	固定螺丝 M
18~22	6×2.8	6
24~30	8×3.3	8
32~38	10×3.3	8
40~42	12×3.3	8
45~50	14×3.8	10
55	16×4.3	12

链条

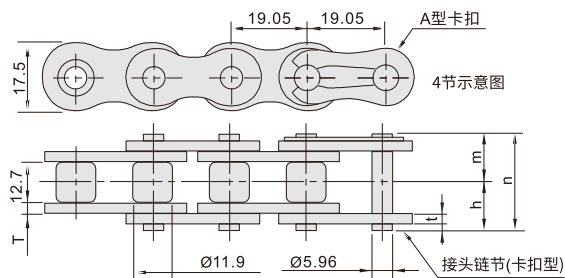

- 附带接头链节, 需自行安装。

■ 链条	型号	节数(偶数)	接头形式	h	m	n	T/t
	KHT60	8~	A(卡扣)	12.65	14.15	26.8	2.4
	KHTS60			12.65	14.15	26.8	
	KHTR60			13.45	14.95	28.4	
	KHTQ60			14.25	15.75	30	3.2

■ 链条



请按图示订货

■ KHTR60-58

型号	节数	接头形式
KHTR60	8~	A(卡扣)



交期Delivery

3天

发货

○ 本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!

链轮/链条 ◀ 60B系列 (12A)

型号		轴孔直径 D _{H7}	D _p	D _o	轮毂			F ₁	重量(g)	
代码	齿数				H	GD	L			
链轮 KQV60B	** 9	19 20 22 (24)	55.7	63	43	32	32	6	400	
	**10	19 20 22 24 25 (28) (30)	61.65	68	49	37			490	
	**11	19 20 22 24 25 28 30 (32)	67.62	76	51	45			600	
	12	19 20 22 24 25 28 30 32 35	73.6	83	51	\		8	690	
	13	19 20 22 24 25 28 30 32 35 38 (40)	79.6	89	57				810	
	14	19 20 22 24 25 28 30 32 35 38 40	85.61	95	62				960	
	15	18 19 20 22 24 25 28 30 32 35 38 40 42 45	91.62	101	68				1100	
	16	19 20 22 24 25 28 30 32 35 38 40 42 45 48 50	97.65	107	73				1300	
	17	19 20 22 24 25 28 30 32 35 38 40 42 45 48 50	103.67	113					1400	
	18	19 20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	109.71	119			2000			
	19	19 20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	115.74	126	83		40	12	2100	
	20	19 20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	121.78	132					2200	
	21	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	127.82	138					2300	
	22	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	133.86	144					2500	
	23	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	139.9	150					2500	
	24	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	145.95	156					2600	
	25	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	151.99	162					2700	
	26	20 22 24 25 28 30 32 35 38 40 42 45 48 50 55	158.04	168					2900	
	27	22 24 25 28 30 32 35 38 40 42 45 48 50	164.09	174		3000				
	28	22 24 25 28 30 32 35 38 40 42 45 48 50	170.14	180		3100				
	30	22 24 25 28 30 32 35 38 40 42 45 48 50	182.25	193		3400				
	链轮 KQVS60B	10	20 22 25	61.65		68			49	37
		11	20 22 25	67.62	76	51	54	600		
		12	20 22 25	73.6	83	51	\	8	690	
		13	20 22 25 28	79.6	89	57			810	
		14	20 22 25 28	85.61	95	62			960	
		15	20 22 25 28 30 32 35 38	91.62	101	68			1100	
		16	25 28 30 32 35 38	97.65	107	73			1300	
		17	25 28 30 32 35 38	103.67	113				1400	
		18	25 28 30 32 35 38 40	109.71	119			2000		
19		25 28 30 32 35 38 40	115.74	126	2100					
20		25 28 30 32 35 38 40	121.78	132	83	40		12	2200	
21		30 25 40	127.82	138					2300	
22		30 25 40	133.86	144					2500	
23		30 25 40	139.9	150					2500	
24		30 25 40	145.95	156					2600	
25		30 25 40	151.99	162					2700	
30		30 25 40	182.25	193			3400			

注意: **表示链轮外径上带有槽口, 带()D尺寸对应规格的安装方式为T, 其余为N。

■ 链轮



请按图示订货

■ KQVS60B-12-D25

型式	齿数	轴孔直径D _{H7}
KQVS60B	11	20 22 25
	12	20 22 25



交期Delivery

7天

发货

○本产品发货时间不含周日