



链条导向件 ◀ 带安装法兰型/树脂型




横向型 KAT01 KAT02

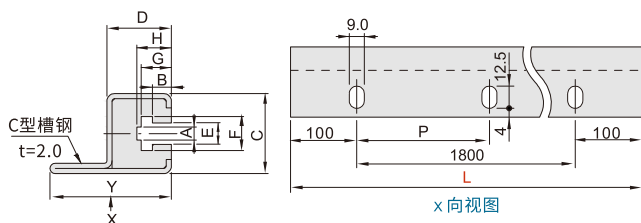


纵向型 KAT03 KAT04

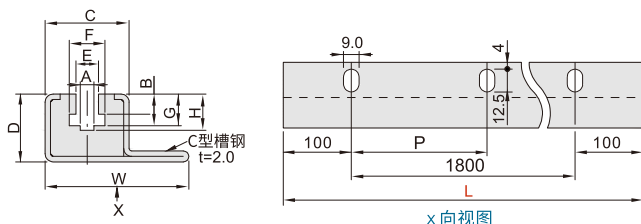

凸型 KAW01



凹型 KAW02

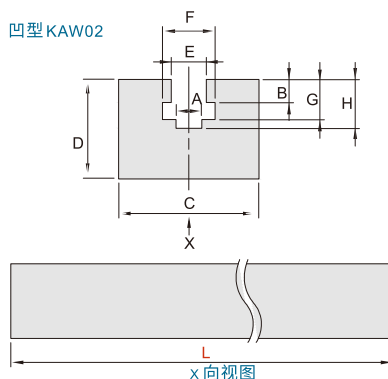

型号		L 指定单位 10mm	K 孔数	P 孔距	A	B	C	D	E	F	G	H	W	Y	重量 Kg/m
代码	规格														
横向 KAT01(钢) KAT02(不锈钢)	35	2000	10	200	4.6	4.3	30	25	5.3	9.9	7.9	9.3	\	47	2.37
	40				5.1	7.4			8.4	13.2	11.7	13.7			2.31
	50				6.4	8.9			10.7	16.5	14.5	16.2			2.24
	60				7.4	11.7			12.4	19.8	18.5	20.6			2.18
纵向 KAT03(钢) KAT04(不锈钢)	35				4.6	4.3			5.3	9.9	7.9	9.3	53	\	2.4
	40				5.1	7.4			8.4	13.2	11.7	13.7			2.34
	50				6.4	8.9			10.7	16.5	14.5	16.2			2.27
	60				7.4	11.7			12.4	19.8	18.5	20.6			2.21

型号		L 长度选择 (mm)	A	B	C	D	E	F	G	H	重量 Kg/m
代码	规格										
凸形 KAW01	40	450 950 2000	7.4	2.4	20	10	\	\	\	\	0.16
	50		8.8	2.8							0.16
	60		11.8	3.5	25						0.36
凹形 KAW02	40		5.1	7.4	25	30	8.4	13.2	11.7	13.7	0.58
	50		6.4	8.9	30	35	10.7	16.5	14.5	16.2	0.8
	60		7.4	11.7	35	40	12.4	19.8	18.5	20.6	1.04



请按图示订货

■ KAW01-50-L950

代码	规格	L 长度选择(mm)
KAW01	40	450 950 2000
	50	



交期Delivery

4天

发货

○本产品发货时间不含周日