



链条张紧器 ◀ 倍速链回程导块




标准型
KSW01

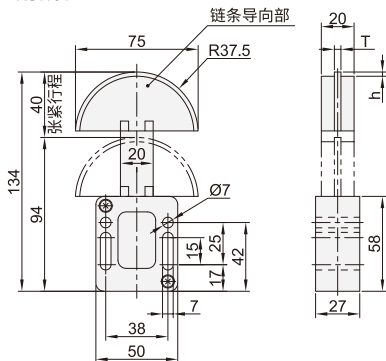

张力调整型
KSW31

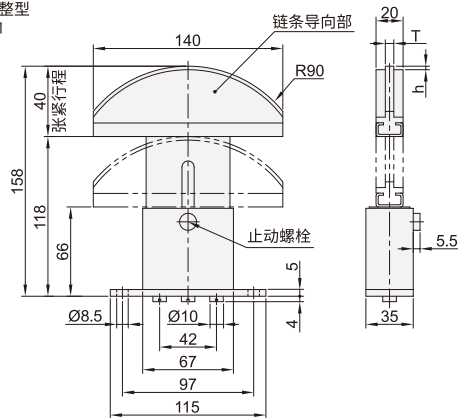


倍速链回程导轨
KSX01

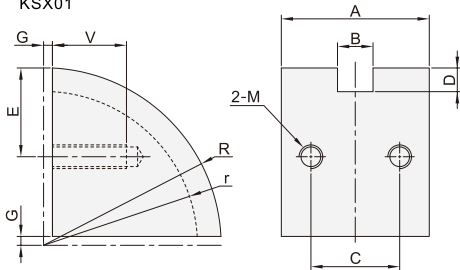


代码 技术说明

出厂时支架安装在回程导轨上
选型方法 LB

LB



禁止拆卸止动螺栓



不附带螺栓

材质: A6063-T5

链条张紧器

型号		负载类型	T	h	适用链条型号
代码	系列				
标准型 KSW01	35	L 轻载	4.1	2.6	KHT35
	40		7.1	2.6	KHT40
	50		8.1	2.8	KHT50
	60	H 重载	11.2	3.5	KHT60
张力调整型 KSW31	40	H 重载	6.4	2.6	KHT40
	50		8.1	2.8	KHT50

张紧负载表

代码	释放的保持螺栓数量	张力负载(N)			
		负载类型: H 重载		负载类型: L 轻载	
		min	max	min	max
KSW01	无	32	58	60	132
KSW31	1个	32	58	60	132
	2个	64	116	120	264
	3个	96	174	180	396

倍速链回程导块

型号		参考规	A	B	C	D	E	M	r	R	V	G
代码	倍速链											
KSX01	BS25	C206B	34	9	22	6	31	M6	54			
		C208A	50	12	30	8	30		52			
		C210A	56	15	35	10			50			
		C212A	60	18	39	12.5	32	M8	47.5			
		C216A	70	23	45	15	41		65	80		
		C206B	34	10	22	9	31	M6	51			
	BS30	C208A	50	14	30	12	30		48	60		
		C210A	56	17	35	14			40	64		
		C212A	60	23	39	17	32	M8	43	60		
		C216A	70	28	45	20	41		60	80		

可选加工 (支架选型方法LB)

倍速	规格	S	t	L	d1	d2	K	J	P	Q
BS25	C206B	25	3	34	6.5	6.5	6	6.75	18	
	C208A	30		60			15	7.75	20	
	C210A			76	8.5	8.5	20.5	10.3		17
	C212A	40	5	93			27		30	
	C216A			98			26.5	14		
BS30	C206B	25	3	38	6.5	6.5	8	6.25	18	15
	C208A	30		67			18.5	8.25	20	
	C210A			80	8.5	8.5	22.5	10		16
	C212A	40	5	102			31.5		30	
	C216A			100			27.5	15		17

材质: A6063-T5, 不附带螺栓



请按图示订货

■ KSW01-35-L

型号	系列	负载类型
代码		
KSW01	35	L

■ KSX01-BS25-C208A-LB

型号	规格	可选加工
代码		
KSX01	BS25	C206B C208A



交期Delivery

6天

发货

○本产品发货时间不含周日