



梅花式联轴器 ◀ 带键槽螺钉夹紧分离型/螺钉夹紧分离型



代码	类型	材质		表面处理	附件
		主体	间隔环		
DCEA83	带键槽螺钉夹紧分离型	S45C	聚氨酯	发黑	内六角圆柱头螺钉
DCEA84	螺钉夹紧分离型	铝合金		本色阳极氧化	

带键槽螺钉夹紧分离型 DCEA83

螺钉夹紧分离型 DCEA84

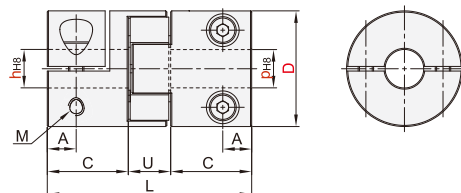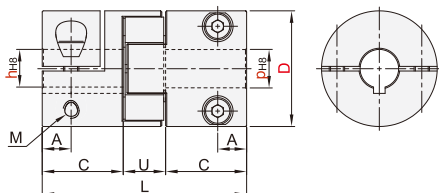

型号	代码	D	h-p																	
带键槽螺钉夹紧分离型 DCEA83	30	h	5	6	6.35	7	8	9	9.525	10	11	12	12.7	13	14	15				
			5 6 6.35 7 8 9	6 6.35 7 8 9	6.35 7 8 9	7 8 9 9.525	8 9 9.525	9 9.525 10	9.525 10	10 11 12	11 12 12.7	12 12.7 13	12.7 13 14	13 14 15	14 15	15				
	40	p	9.525 10 11	9.525 10 11	9.525 10 11	10 11 12	10 11 12	11 12 12.7	11 12 12.7	12 12.7 13	12 12.7 13	13 14 15	14 15 16	15 16 17	16 17 18	17 18 19	18 19 20	19 20 22	20 22	22
			12 12.7 13	12 12.7 13	12 12.7 13	12.7 13 14	12.7 13 14	13 14 15	13 14 15	14 15 16	14 15 16	15 16 17	16 17 18	17 18 19	18 19 20	19 20 22	20 22	22	22	22
螺钉夹紧分离型 DCEA84	55	h	12	12.7	13	14	15	16	17	18	19	20	22	24	25	28	30			
			12 12.7 13 14	12.7 13 14	13 14 15 16	14 15 16	15 16 17	16 17 18	17 18 19	18 19 20	19 20 22	20 22 24	22 24 25	24 25 28	25 28 30	28 30	30			
	65	p	15 16 17 18	15 16 17 18	17 18 19 20	17 18 19	18 19 20	19 20 22	20 22 24	22 24 25	24 25 28	25 28 30	28 30	30	30	30	30			
			19 20 22 24	19 20 22 24	22 24 25	22 24 25	24 25 28	25 28 30	28 30	30	30	30	30	30	30	30	30			
	80	h	19	20	22	24	25	28	30	32	35	36	38	40	42	45	45			
			19 20 22 24 25	20 22 24 25 28	22 24 25 28	24 25 28	25 28 30	28 30 32	30 32 35	32 35 36	35 36 38	36 38 40	38 40 42	40 42 45	42 45	45	45			
	65	p	14 15 16 17	15 16 17 18	16 17 18 19	17 18 19 20	18 19 20	19 20 22	20 22 24	22 24 25	24 25 28	25 28 30	28 30 32	30 32 35	32 35 36	35 36 38	36 38 40	38 40 42	40 42 45	42 45 45
			18 19 20 22	19 20 22 24	20 22 24 25	22 24 25 28	22 24 25	24 25 28	25 28 30	28 30 32	30 32 35	32 35 36	35 36 38	36 38 40	38 40 42	40 42 45	42 45 45			

型号	代码	D	L	C	U	A	M	锁紧扭距 (N.m)	额定扭距 (N.m)	最大扭矩 (N.m)	最高转速 (r/min)	惯性力矩 (kg.m ²)	静态扭转刚度 (N.m/rad)	容许安装偏差		
DCEA83	30	53	21	11	7.5	M4	3.4	12.5	25	21000	1.4×10 ⁻⁵	130	0.1	1		±1
	40	66	25.5	15	8.5	M5	7	17	34	15000	8.7×10 ⁻⁵	1200				±1.2
	55	78	30.5	17	10	M6	14	45	90	10000	3.6×10 ⁻³	2500				±1.4
	65	90	36	18	12	M8	30	100	200	9000	8.7×10 ⁻³	3800				±1.5
DCEA84	80	113.5	46	21.5	15	M8	30	250	500	8000	4.1×10 ⁻²	4000	0.1	1		±1.8
	30	53	21	11	7.5	M4	3.4	12.5	25	21000	1.4×10 ⁻⁵	130				±1
	40	66	25.5	15	8.5	M5	7	17	34	15000	8.7×10 ⁻⁵	1200				±1.2
	55	78	30.5	17	10	M6	14	45	90	10000	3.6×10 ⁻³	2500				±1.4
	65	90	36	18	12	M8	30	100	200	9000	8.7×10 ⁻³	3800	0.1	1		±1.5
	80	113.5	46	21.5	15	M10	30	250	500	8000	4.1×10 ⁻²	4000				±1.8

惯性力矩和重量按最大孔计算!

可选加工	变更h/p孔径													
代码	hh() ph()													
技术说明		<table><tr><th>D</th><th>hh.ph</th></tr><tr><td>30</td><td>5~15</td></tr><tr><td>40</td><td>8~22</td></tr><tr><td>55</td><td>12~30</td></tr><tr><td>65</td><td>14~38</td></tr><tr><td>80</td><td>19~45</td></tr></table>	D	hh.ph	30	5~15	40	8~22	55	12~30	65	14~38	80	19~45
	D	hh.ph												
	30	5~15												
	40	8~22												
	55	12~30												
	65	14~38												
80	19~45													
选型方法:hh5.1 ph7.5														
最小单位0.1														
hh须≤ph														
选型时须将h(p)变更为hh(ph)														



请按图示订货

■ DCEA83-D80-h45-p45

型号	代码	D	h-p
DCEA83	80	h	45
			p 45



交期Delivery

5天

发货

○本产品发货时间不含周日

联轴器

06