


波纹管式联轴器 ◀ 螺钉固定型/螺钉夹紧型(铝合金)




代码	类型	材质	表面处理	附件
		主体		
CWA01	螺钉固定型	铝合金	阳极氧化	内六角紧定螺钉
CWA21	螺钉夹紧型			内六角圆柱头螺钉

CWA01 螺钉固定型

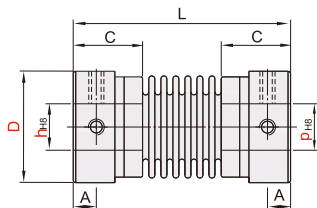

CWA21 螺钉夹紧型

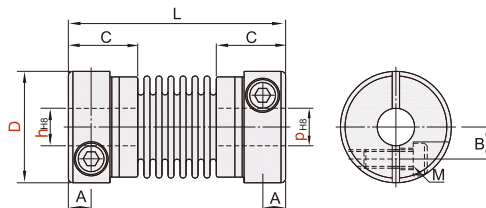

型号		h-p (h≤p)	L	C	A	B	M	锁紧扭矩 (N·m)
代码	D							
CWA01	16	4 / 5 / 6 / 8	27	9	3	/	2.5	1
	20	5 / 6 / 6.35 / 7 / 8 / 9 / 9.525 / 10	32	10	3.5	/	2.5	1
	25	6 / 6.35 / 7 / 8 / 9 / 9.525 / 10 / 11 / 12	37	12	4.5	/	3	1.5
	32	8 / 9 / 9.525 / 10 / 11 / 12 / 12.7 / 13 / 14 / 15	42	13.5	5	/	4	2.5
	40	8 / 9 / 9.525 / 10 / 11 / 12 / 12.7 / 13 / 14 / 15 / 16 / 17 / 18 / 19	51	12.5	4.5	/	5	4
	55	12 / 12.7 / 13 / 14 / 15 / 16 / 17 / 18 / 19	57	13.5	5	/	6	7
CWA21	16	4 / 5 / 6 / 8	26.5	9	3	5	2.5	1
	20	5 / 6 / 6.35 / 7 / 8 / 9 / 9.525 / 10	32	10	3.5	6.5	2.5	1
	25	6 / 6.35 / 7 / 8 / 9 / 9.525 / 10 / 11 / 12	36.5	12	4.5	9	3	1.5
	32	8 / 9 / 9.525 / 10 / 11 / 12 / 12.7 / 13 / 14 / 15	42	13.5	5	11	4	2.5
	40	8 / 9 / 9.525 / 10 / 11 / 12 / 12.7 / 13 / 14 / 15 / 16 / 17 / 18 / 19	55	12.5	4.5	/	5	4
	55	12 / 12.7 / 13 / 14 / 15 / 16 / 17 / 18 / 19	72	13.5	5	/	6	7

■ 尺寸性能表

代码	D	额定扭矩 (N·m)	最大扭矩 (N·m)	静态扭转刚性 (N·m/rad)	径向偏差 (mm)	角向偏差 (°)	最高转速 (rpm)	惯性力矩 (kg·m²)	重量 (g)
CWA01	16	0.5	1	110	0.1	1.5	39000	3.5×10^{-7}	9
	20	0.8	1.6	180	0.15	2	31000	9.9×10^{-7}	16
	25	1.3	2.6	240	0.15		25000	3.1×10^{-6}	32
	32	2	4	330	0.2		19000	9.2×10^{-6}	57
	40	6	12	520	0.2		8000	1.5×10^{-5}	88
	55	20	40	850	0.2	2	6000	2.3×10^{-5}	180
CWA21	16	0.5	1	110	0.1		9500	3.7×10^{-7}	10
	20	0.8	1.6	180	0.15		7700	1×10^{-6}	16
	25	1.3	2.6	240	0.15		6100	3.1×10^{-6}	32
	32	2	4	330	0.2		4800	9.6×10^{-6}	58
	40	6	12	520	0.2		4200	1.8×10^{-5}	88
	55	20	40	850	0.2		3900	2.8×10^{-5}	180



请按图示订货

■ CWA01-D16-h5-p6

型号		h-p (h≤p)
代码	D	
CWA01	16	4 5 6 8



交期Delivery

3 天 发货

○本产品发货时间不含周日

联
轴
器

06