



O型圈 ◀ P系列



代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	用途	适用标准
YXC01	P系列	丁腈橡胶	HA65 ⁺¹⁰ ₀	黑色	-20-100℃	耐矿物油用	JIS B 2401
YXC02			HA85 ⁺¹⁰ ₀		-15-100℃		
YXC11		硅橡胶	HA45 ⁺¹⁰ ₀	半透明色 红褐色	-40-200℃	耐高温用	
YXC12			HA65 ⁺¹⁰ ₀				
YXC21		氟橡胶	HA65 ⁺¹⁰ ₀	黑色	-10-200℃		
YXC22			HA85 ⁺¹⁰ ₀				
YXC31		乙丙橡胶	HA65 ⁺¹⁰ ₀		-40-120℃		
YXC41		氟树脂	/	白色	-10-200℃	耐高压用	

YXC41

YXC01/02/11/12/21/22/31

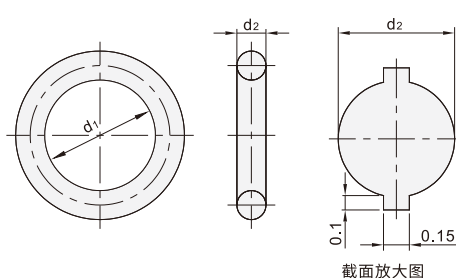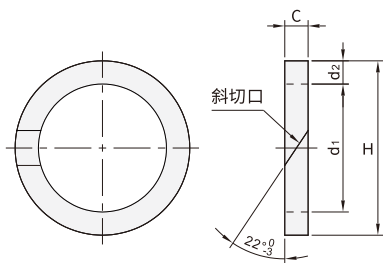

截面放大图

型号		公称编号	d ₂		d ₁		H		C	
代码	规格									
YXC41	15	P15	2	+0.03 -0.05	15	+0.15 0	19	0 -0.15	1.25	±0.1
	16	P16			16		20			
	18	P18			18		22			
	20	P20			20		24			
	21	P21			21		25			
	22	P22			22		26			
	22A	P22A			22		28			
	24	P24	24		30					
	25	P25	25		31					
	26	P26	26		32					
	28	P28	28		34					
	30	P30	30		36					
	32	P32	32		38					
	34	P34	34		40					
	38	P38	38		44					
	40	P40	40		46					
	42	P42	42		48					
	48	P48	48		54					
	50	P50	50		56					

■ YXC01-YXC31的详细参数表见下页



请按图示订货

■ YXC01-3

型号

代码

YXC01

规格

3



交期Delivery

3天

发货

○ 本产品发货时间不含周日

O型圈 ◀ P系列

型号		公称编号	d ₂	d ₁				配合尺寸				
代码	规格			尺寸	YXC01 YXC02	YXC11 YXC12 YXC31	YXC21 YXC22	d ₁		H		
YXC01 YXC02 YXC11 YXC12 YXC21 YXC22 YXC31	3	P3	1.9±0.07	2.8	±0.13	±0.20	±0.15	3	0 -0.04	6	+0.04 0	
	4	P4		3.8				4		7		
	5	P5		4.8				5		8		
	6	P6		5.8	±0.14	±0.21	±0.17	6		9		
	7	P7		6.8				7		10		
	8	P8		7.8				8		11		
	9	P9		8.8				9		12		
	10	P10		9.8	±0.16	±0.24	±0.19	10		13		
	10A	P10A								14		
	11	P11	2.4±0.08	10.8	±0.17	±0.26	±0.20	11	0 -0.05	15	+0.06 0	
	11.2	P11.2		11.0				11.2		15.2		
	12	P12		11.8				12		16		
	12.5	P12.5		12.3	±0.18	±0.27	±0.21	12.5		16.5		
	14	P14		13.8				14		18		
	15	P15		14.8				15		19		
	16	P16		15.8	±0.19	±0.29	±0.23	16		20		
	18	P18		17.8				18		22		
	20	P20		19.8				20		24		
	21	P21		20.8				21		25		
	22	P22		21.8	±0.23	±0.35	±0.27	22		26		
	22A	P22A		21.7				22		28		
	22.4	P22.4		22.1				22.4		28.4		
	24	P24		23.7				24		30		
	25	P25		24.7	±0.24	±0.36	±0.29	25		31		
	25.5	P25.5		25.2				25.5		31.5		
	26	P26		25.7	±0.25	±0.38	±0.30	26		32		
	28	P28		27.7				28		34		
	29	P29		28.7				29		35		
	29.5	P29.5		29.2	±0.28	±0.42	±0.33	29.5		35.5		
	30	P30		29.7				30		36		
	31	P31	3.5±0.09	30.7	±0.29	±0.44	±0.35	31	0 -0.08	37	+0.07 0	
	YXC11 YXC12	P31.5		31.2				31.5		37.5		
	32	P32		31.7	±0.30	±0.45	±0.36	32		38		
	34	P34		33.7				34		40		
	35	P35		34.7				35		41		
	35.5	P35.5		35.2	±0.33	±0.50	±0.39	35.5		41.5		
	36	P36		35.7				36		42		
	38	P38		37.7				38		44		
	39	P39		38.7	±0.36	±0.54	±0.43	39		45		
	40	P40		39.7				40		46		
	41	P41		40.7	±0.37	±0.56	±0.44	41		47		
	42	P42		41.7				42		48		
	44	P44		43.7				44		50		
	45	P45		44.7	±0.40	±0.60	±0.48	45		51		
	46	P46		45.7				46		52		
	48	P48		47.7				48		54		
	50	P50		49.7	±0.44	±0.66	±0.53	50		56		
	50A	P50A		49.7				50		60		
	52	P52	5.7±0.12	51.6	±0.46	±0.69	±0.55	52	0 -0.10	62	+0.09 0	
	53	P53		52.6				53		63		
	55	P55		54.6	±0.48	±0.72	±0.57	55		65		
	56	P56		55.6				56		66		
	58	P58		57.6				58		68		
	60	P60		59.6	±0.52	±0.78	±0.62	60		70		
	62	P62		61.6				62		72		
	63	P63		62.6				63		73		
	65	P65		64.6	±0.56	±0.84	±0.67	65		75		
	67	P67		66.6				67		77		
	70	P70		69.6				70		80		
	71	P71		70.6	±0.61	±0.92	±0.73	71		81		
	75	P75		74.6				75		85		
	80	P80		79.6				80		90		

密封件

31



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台