


30度梯形丝杆 ◀ 支座组件用



代码	类型	螺纹旋向	配合形式	材质		表面处理
				国标	相当	
AHC02	支座组件用	右旋	标准型	45	S45C	发黑
AHC06				Y1Cr18Ni9	SUS303	—
AHC07			左旋	通配型	45	S45C
AHC12		45			S45C	
AHC16		标准型		Y1Cr18Ni9	SUS303	—
AHC17				通配型	45	S45C

通配型梯形丝杆和螺帽配合会有较大间隙，如需紧配请选择标准型。

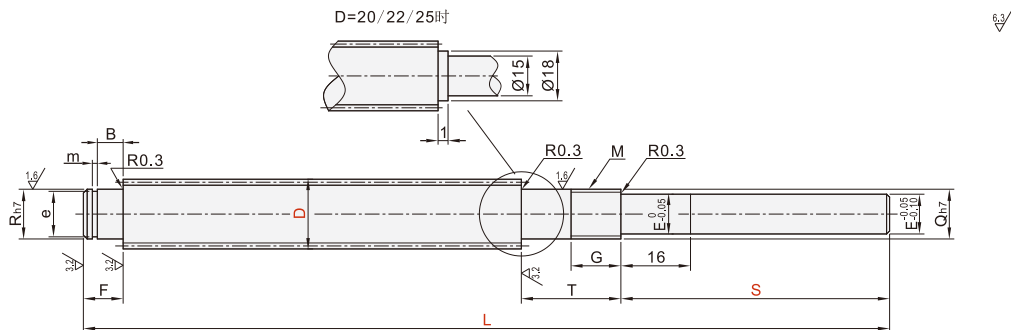

型号		最小单位0.5		F	R	e	e公差	m	m公差	B	T	Q	G	M×螺距	E	螺距P
代码	D	L	S													
右旋 左旋 AHC02 AHC12 AHC06 AHC16 AHC07 AHC17	12	70~1000	16-100	10	8	5	$\begin{smallmatrix} 0 \\ -0.075 \end{smallmatrix}$	0.7	+0.14 0	7	26	8	12	M8×1.0	6	2
	14	80~1200		10	9.6	$\begin{smallmatrix} 0 \\ -0.09 \end{smallmatrix}$	1.15	8		29	10	13	M10×1.0	8	3	
	18			12	11.5	12		10		4						
	20	100~1200		12	15	14.3	$\begin{smallmatrix} 0 \\ -0.11 \end{smallmatrix}$	9		34	15	15	M15×1.0	12	5	
	22															
	25															

可选加工																																																																
	NR()(R部)	RC()(R部)	FE()(E部)	SE()(E部)	ME()(E部)MR()(左侧)	ZE()(E部)	KE()(E部)																																																									
代码	NR()(R部)	RC()(R部)	FE()(E部)	SE()(E部)	ME()(E部)MR()(左侧)	ZE()(E部)	KE()(E部)																																																									
技术说明	选型方法NR	选型方法RC 可与MR并用	选型方法 FE5-FW10-FY1 最小单位0.5	选型方法 FE5-SW10-SY8 最小单位0.5	选型方法ME6 E.R.D ME.MR选择 <table><tr><td>6</td><td>3</td></tr><tr><td>8</td><td>3-4</td></tr><tr><td>10</td><td>3-4-5</td></tr><tr><td>12</td><td>3-4-5-6</td></tr><tr><td>14-15</td><td>3-4-5-6-8</td></tr><tr><td>14-15</td><td>3-4-5-6-8-10</td></tr><tr><td>14-15</td><td>3-4-5-6-8-10-12</td></tr></table>	6	3	8	3-4	10	3-4-5	12	3-4-5-6	14-15	3-4-5-6-8	14-15	3-4-5-6-8-10	14-15	3-4-5-6-8-10-12	选型方法ZE6-W10-A7 最小单位0.5 A=5-20 <table><tr><th colspan="2">ZE=E W选择</th></tr><tr><td>6</td><td>5</td></tr><tr><td>8</td><td>6</td></tr><tr><td>10</td><td>8</td></tr><tr><td>12</td><td>9-10</td></tr></table>	ZE=E W选择		6	5	8	6	10	8	12	9-10	选型方法KE8-C10 最小单位0.5 KE=0时，键槽形状 如下图:  <table><tr><th colspan="4">轴键槽尺寸</th></tr><tr><th>E部</th><th>b1</th><th>公差(N9)</th><th>r1</th></tr><tr><td>6</td><td>2</td><td>-0.004</td><td rowspan="5">0.08 0.16</td></tr><tr><td>8</td><td>3</td><td>-0.029</td></tr><tr><td>10</td><td>4</td><td>0</td></tr><tr><td>12</td><td>5</td><td>-0.030</td></tr><tr><th>E部</th><th>t1</th><th>公差</th></tr><tr><td>6</td><td>1.2</td><td>+0.1</td></tr><tr><td>8</td><td>1.8</td><td>0</td></tr><tr><td>10</td><td>2.5</td><td>0</td></tr></table>	轴键槽尺寸				E部	b1	公差(N9)	r1	6	2	-0.004	0.08 0.16	8	3	-0.029	10	4	0	12	5	-0.030	E部	t1	公差	6	1.2	+0.1	8	1.8	0	10	2.5	0
	6	3																																																														
	8	3-4																																																														
	10	3-4-5																																																														
	12	3-4-5-6																																																														
	14-15	3-4-5-6-8																																																														
	14-15	3-4-5-6-8-10																																																														
	14-15	3-4-5-6-8-10-12																																																														
	ZE=E W选择																																																															
	6	5																																																														
8	6																																																															
10	8																																																															
12	9-10																																																															
轴键槽尺寸																																																																
E部	b1	公差(N9)	r1																																																													
6	2	-0.004	0.08 0.16																																																													
8	3	-0.029																																																														
10	4	0																																																														
12	5	-0.030																																																														
E部	t1	公差																																																														
6	1.2	+0.1																																																														
8	1.8	0																																																														
10	2.5	0																																																														



请按图示订货

■ AHC02-D12-L150-S45-RC

型号		L	S	可选加工代码
代码	D			
AHC02	12	70~1000	16-100	MR RC ..



交期Delivery

7天	发货
----	----

○本产品发货时间不含周日