


30度梯形丝杆 ◀ B型 一端二阶型



代码	类型	螺纹旋向	材质		表面处理
			国标	相当	
AHP32	一端二阶B型	一端左旋	45	S45C	发黑
AHP36		一端右旋	Y1Cr18Ni9	SUS303	—

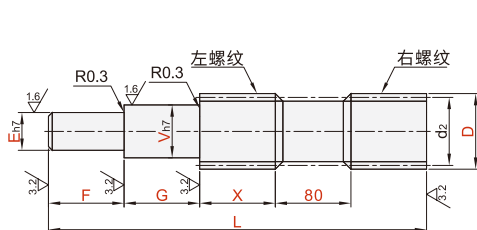

6.3/

丝杆
杆形
丝杆
组件

22

型号		最小单位0.5		V选择	最小单位0.5		螺距	有效直径d2	螺纹牙根直径 (min)	螺纹升角	
代码	D	L	F.G		E	X					
AHP32 AHP36	12	70-1000	3≦F≦EX8 3≦G≦VX8 Q≦9时F.G为 V的6倍以下	7 8 9	V/2≦E≦ V-1.5	请根据使用 要求指定尺寸.	2	11	9.2	3°19'	
	14			7 8 9 10			3	12.5	10.1	4°22'	
	16			8 9 10 12				14.5	12.1	3°46'	
	18						80-1200	16	13.1	4°33'	
	20	120-1200		9 10 12 14 15			4	18	15.1	4°03'	
	22							19.5	16.1	4°40'	
	25							22.5	19	4°03'	
	28							25.5	22	3°34'	
	32	150-1200		12 14 15 16 17 20 25			5	29	24.5	3°46'	
	36			16 17 20 25				6	33	28.5	3°19'
	40			17 20 25 30					37	32.5	2°57'
	50			200-1200				25 30 35 40	8	46	40.4

可选加工																																																																																																																							
	AE()(E)部	SE()(E)部	MC()(右端面) ME()(E)部	BV()(V)部	ZE()(E)部	KV()(V)部 KE()(E)部																																																																																																																	
技术说明	选型方法 AE13.3 最小单位0.1 挡圈槽尺寸	选型方法 SE3-SW10-SY7 最小单位0.5	选型方法 ME24 <table><tr><th>D.E</th><th>MC.ME选择</th></tr><tr><td>5</td><td>3</td></tr><tr><td>6</td><td>3</td></tr><tr><td>7-8</td><td>3-4</td></tr><tr><td>9-10</td><td>3-4-5</td></tr><tr><td>11-12</td><td>3-4-5-6</td></tr><tr><td>13-15</td><td>3-4-5-6-8</td></tr><tr><td>16-17</td><td>3-4-5-6-8-10</td></tr><tr><td>18-24</td><td>3-4-5-6-8-10-12</td></tr><tr><td>25-30</td><td>3-4-5-6-8-10-12-16</td></tr><tr><td>31-39</td><td>3-4-5-6-8-10-12-16-20</td></tr><tr><td>40-50</td><td>3-4-5-6-8-10-12-16-20-24-30</td></tr></table>	D.E	MC.ME选择	5	3	6	3	7-8	3-4	9-10	3-4-5	11-12	3-4-5-6	13-15	3-4-5-6-8	16-17	3-4-5-6-8-10	18-24	3-4-5-6-8-10-12	25-30	3-4-5-6-8-10-12-16	31-39	3-4-5-6-8-10-12-16-20	40-50	3-4-5-6-8-10-12-16-20-24-30	选型方法 BV20 BV≤G螺距X3 <table><tr><th>V</th><th>Mx螺距</th></tr><tr><td>8</td><td>M8x1.0</td></tr><tr><td>10</td><td>M10x1.0</td></tr><tr><td>12</td><td>M12x1.0</td></tr><tr><td>14</td><td>M14x1.0</td></tr><tr><td>15</td><td>M15x1.0</td></tr><tr><td>17</td><td>M17x1.0</td></tr><tr><td>20</td><td>M20x1.0</td></tr><tr><td>25</td><td>M25x1.5</td></tr><tr><td>30</td><td>M30x1.5</td></tr><tr><td>35</td><td>M35x1.5</td></tr><tr><td>40</td><td>M40x1.5</td></tr></table>	V	Mx螺距	8	M8x1.0	10	M10x1.0	12	M12x1.0	14	M14x1.0	15	M15x1.0	17	M17x1.0	20	M20x1.0	25	M25x1.5	30	M30x1.5	35	M35x1.5	40	M40x1.5	选型方法 ZE12-W10-A8 最小单位0.5 <table><tr><th>ZE=E</th><th>W(最小单位1)</th></tr><tr><td>6-10</td><td>5-8</td></tr><tr><td>11-14</td><td>8-10</td></tr><tr><td>15-19</td><td>10-14</td></tr><tr><td>20-25</td><td>14-20</td></tr><tr><td>26-30</td><td>19-24</td></tr><tr><td>31-35</td><td>22-28</td></tr><tr><td>36-40</td><td>26-30</td></tr></table>	ZE=E	W(最小单位1)	6-10	5-8	11-14	8-10	15-19	10-14	20-25	14-20	26-30	19-24	31-35	22-28	36-40	26-30	选型方法 KV8-C10 最小单位0.5 KV KE=0时, 键槽形状如上图 <table><tr><th rowspan="2">V.E</th><th colspan="4">轴键槽尺寸</th></tr><tr><th>b1</th><th>t1</th><th>r1</th><th></th></tr><tr><td>6-7</td><td>2</td><td>0.004</td><td>1.2</td><td>0.08</td></tr><tr><td>8-10</td><td>3</td><td>-0.029</td><td>1.8</td><td>0.16</td></tr><tr><td>11-12</td><td>4</td><td>2.5</td><td>0</td><td>0.16</td></tr><tr><td>13-17</td><td>5</td><td>0</td><td>3.0</td><td>0.25</td></tr><tr><td>18-22</td><td>6</td><td>-0.030</td><td>3.5</td><td>0.25</td></tr><tr><td>23-30</td><td>8</td><td>0</td><td>4.0</td><td>0.25</td></tr><tr><td>31-38</td><td>10</td><td>-0.036</td><td>5.0</td><td>0.25</td></tr><tr><td>39-40</td><td>12</td><td>0 -0.043</td><td>5.0</td><td>0.40</td></tr></table>	V.E	轴键槽尺寸				b1	t1	r1		6-7	2	0.004	1.2	0.08	8-10	3	-0.029	1.8	0.16	11-12	4	2.5	0	0.16	13-17	5	0	3.0	0.25	18-22	6	-0.030	3.5	0.25	23-30	8	0	4.0	0.25	31-38	10	-0.036	5.0	0.25	39-40	12	0 -0.043	5.0	0.40
	D.E	MC.ME选择																																																																																																																					
5	3																																																																																																																						
6	3																																																																																																																						
7-8	3-4																																																																																																																						
9-10	3-4-5																																																																																																																						
11-12	3-4-5-6																																																																																																																						
13-15	3-4-5-6-8																																																																																																																						
16-17	3-4-5-6-8-10																																																																																																																						
18-24	3-4-5-6-8-10-12																																																																																																																						
25-30	3-4-5-6-8-10-12-16																																																																																																																						
31-39	3-4-5-6-8-10-12-16-20																																																																																																																						
40-50	3-4-5-6-8-10-12-16-20-24-30																																																																																																																						
V	Mx螺距																																																																																																																						
8	M8x1.0																																																																																																																						
10	M10x1.0																																																																																																																						
12	M12x1.0																																																																																																																						
14	M14x1.0																																																																																																																						
15	M15x1.0																																																																																																																						
17	M17x1.0																																																																																																																						
20	M20x1.0																																																																																																																						
25	M25x1.5																																																																																																																						
30	M30x1.5																																																																																																																						
35	M35x1.5																																																																																																																						
40	M40x1.5																																																																																																																						
ZE=E	W(最小单位1)																																																																																																																						
6-10	5-8																																																																																																																						
11-14	8-10																																																																																																																						
15-19	10-14																																																																																																																						
20-25	14-20																																																																																																																						
26-30	19-24																																																																																																																						
31-35	22-28																																																																																																																						
36-40	26-30																																																																																																																						
V.E	轴键槽尺寸																																																																																																																						
	b1	t1	r1																																																																																																																				
6-7	2	0.004	1.2	0.08																																																																																																																			
8-10	3	-0.029	1.8	0.16																																																																																																																			
11-12	4	2.5	0	0.16																																																																																																																			
13-17	5	0	3.0	0.25																																																																																																																			
18-22	6	-0.030	3.5	0.25																																																																																																																			
23-30	8	0	4.0	0.25																																																																																																																			
31-38	10	-0.036	5.0	0.25																																																																																																																			
39-40	12	0 -0.043	5.0	0.40																																																																																																																			



请按图示订货

■ AHP32-D12-L201-F20-G16-V8-E7-X50-AE15

型号		L	F.G	V选择	E	X	可选加工 代码
代码	D						
AHP32	12	70~1000	3≤F≤EX8	7 8 9	V/2≤E	请根据使用	AE()(SE())..
AHP36	14		3≤G≤VX8	7 8 9 10	≤V-1.5	要求指定尺寸	



交期Delivery

8天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台