

30度梯形丝杆用螺帽 ◀ 直杆型/自润滑法兰型




代码	类型	配合形式	螺纹旋向	材质
AJL51	直杆型	标准型	左旋	黄铜
AJL52			右旋	
AJL53		通配型	左旋	
AJL54			右旋	
AJL62	自润滑	圆型	右旋	黄铜 (嵌入固体润滑剂)
AJL66	法兰型	双孔对边型		
AJL70		四孔对边型		

通配型梯形丝杆和螺帽配合会有较大间隙,如需紧配请选择标准型。


直杆型

AJL51/52/53/54

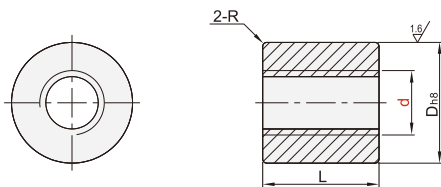


圆型

AJL62





双孔对边型

AJL66



四孔对边型

AJL70



型号	螺距P	D	L	R	动态容许推力 (KN)	重量
代码	d					
AJL51 AJL52 AJL53 AJL54	(8)	1.5	20	20	1.40	22
	10	2	22	22	2.03	38
	12	3	28	26	2.81	48
	14	4	32	31	3.62	98
	16	5	36	40	4.86	157
	18	6	44	45	6.84	235
	20	8	52	49	7.62	206
	22		58	57	9.87	388
	25		68	67	11.38	319
	28				11.40	319
	32				17.03	526
	36				21.15	717
	40				27.44	1120
	(50)				40.00	

()内的规格仅适用AJL51/52.

型号		螺距P	D	L1	D1	T	P. C. D	K	W	动态容许 推力(KN)	重量(g)		
代码	d										AJL62	AJL66	AJL70
圆型 AJL62	10	2	20	24	37	5	26	4.3	23	2.50	80	66	67
	12		22	30	45		31	5.3	25	3.90	120	95	95
	14	4.50				110				85	86		
双孔 双边形 AJL66	16	3	28	35	52	6	38	6.3	31	6.62	200	169	172
	20		32	40	57		42		35	9.80	260	219	220
	22	5				36			50	62	7	47	41
25	14.20		350	290	297								
四孔 对边型 AJL70	(28)	6	44	56	77	8	58	9	/	17.90	630	/	/
	(32)									21.05	580		
	(36)		52	60	85	66	25.75	820					
	(40)		58	70	99	10	76	11		33.80	1250		

()内的规格仅适用AJL62.



请按图示订货

■ AJL51-d10

型号

代码

AJL51

d

10

螺距P

2



交期Delivery

8天

发货

○本产品发货时间不含周日