



30度梯形丝杆用螺帽 ◀ 加高型/加宽型 方型



代码	类型	配合形式	螺纹旋向	材质
AJR66	方型	加高型	标准型	黄铜
AJR67			左旋	
AJR68		通配型	右旋	
AJR69			左旋	

通配型梯形丝杠和螺帽配合会有较大间隙，如需紧配请选择标准型。






型号	螺距P	h	W	H	L	L ₁	L ₂	W ₁	M ₁	V ₁	M ₂	V ₂	t	动态容许推力 (KN)	重量(g)
左旋 AJR 66 AJR 68	2	20	21	30	24	16	—	12	M4	8	—	—	6	2.52	98
	3	23	23	34	30	21	9	13	M5	10	M5	15	7	3.9	148
	4	27	29	41	35	25	11	18	M6	12	M6	18	8	4.88	136
	5	29	33	45	40	30	16	22	M8	16	M8	22	8	6.65	257
	6	30	37	48	50	40	20	26	M10	20	M10	26	10	8.7	377
右旋 AJR 67 AJR 69	3	23	23	34	30	21	9	13	M5	10	M5	15	7	9.8	368
	4	27	29	41	35	25	11	18	M6	12	M6	18	8	12.33	576
	5	29	33	45	40	30	16	22	M8	16	M8	22	8	14.2	535
	6	30	37	48	50	40	20	26	M10	20	M10	26	10	20	1046
	8	38	45	60	62	50	25	32	M12	24	M12	32	12	22.8	968



代码	类型	配合形式	螺纹旋向	材质
AJR71	方型	加宽型	标准型	黄铜
AJR72			左旋	
AJR73		通配型	右旋	
AJR74			左旋	
AJR76		自润滑型	右旋	黄铜(嵌入固体润滑剂)

通配型梯形丝杠和螺帽配合会有较大间隙，如需紧配请选择标准型。

标准型AJR71/72 自润滑型 AJR73/74
通配型AJR73/74 AJR76

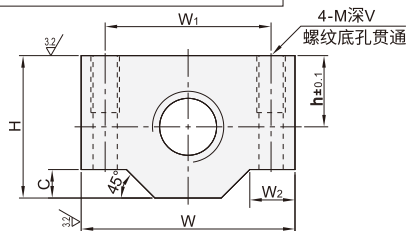

型号	螺距P	h	W	H	L	L ₁	W ₁	W ₂	C	M	V	动态容许推力 (KN)	重量(g)
左旋 AJR 71 AJR 73	2	10	31	20	24	16	20	8	4	M4	10	2.5	85
	3	11	39	22	30	20	26	10	5	M5	12	3.9	145
	4	14	45	28	35	24	32	11	6	M6	15	4.8	135
	5	16	49	32	40	28	36	12	7	M7	18	6.65	265
	6	18	53	36	44	32	40	13	8	M8	20	8.7	370
右旋 AJR 72 AJR 74 AJR 76	3	11	39	22	30	20	26	10	5	M5	12	9.8	355
	4	14	45	28	35	24	32	11	6	M6	15	12.35	665
	5	16	49	32	40	28	36	12	7	M7	18	14.2	625
	6	18	53	36	44	32	40	13	8	M8	20	17.9	1040
	8	22	65	44	56	40	52	16	10	M10	25	21.05	965

回带() 规格不适用AJR 76自润滑型。



请按图示订货

■AJR66-d10

型号

代码

AJR66

螺距P

d

10

2



交期Delivery

12天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！