


30度梯形丝杆用螺帽支架



代码	类型	材质		表面处理
		国标	相当	
AJU01	螺帽支架	45	S45C	发黑
AJU02		LF2	A5052	本色阳极氧化

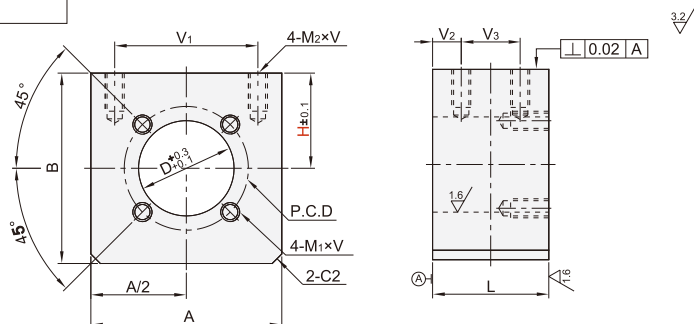

型号		H	A	B	P.C.D	M1xV	D	V1	L	V2	V3	M2*V	★适用螺帽
AJU01 AJU02	264	20 25 30 35 40	40	H+20	26	M4x8	20	30	24	6	12	M4x8	10
	315	23 25 30 35 40	50	H+23	31	M5x10	22	35	30	8	14	M5x10	12~14
	386	23 25 27 30 35 40 50	60	H+27	38	M6x12	28	45	34		18	M6x12	16
	426	27 29 30 35 40 50	65	H+29	42		32	50	39		23		18~20
	476	30 32 35 40 50	70	H+32	47	M8x15	36	60	46		30	M8x15	22~25
	588	32 35 40 45 50 60	80	H+40	58		44	60	48		32		28~32
	668	40 43 45 50 60	86	H+43	66	M10x16	52	65	52	10	36	M10x16	36
	7610	45 50 55 60 70	100	H+50	76		58	75	60		40		40
	8510	50 56 60 70	116	H+58	85		68	85	70		50		50

代码	技术说明			
HC()	变更H尺寸	选型方法HC31.4 最小单位0.1		
			规格	HC
			264	20.0~40.0
			315	23.0~40.0
			386	27.0~50.0
			426	29.0~50.0
			476	32.0~50.0
			588	40.0~60.0
			668	43.0~60.0
			7610	50.0~70.0
8510	58.0~70.0			



请按图示订货

■AJU01-264-H25-HC28.5

型号		H	可选加工代码
代码	规格		
AJU01	264	20 25 30	HC()



交期Delivery

5天

发货

○本产品发货时间不含周日

梯形丝杆相关组件
22



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！